

**brennenstuhl®**

\_ smart technology.

17/18  
P R O D U C T C A T A L O G U E

BS

SAFETY FIRST!





Our expanded logistics centre in Tübingen now has 34,000 pallet spaces to serve you best.

**Just for you!**

We have done our homework and repositioned ourselves for you.  
Because we know what you need:  
the right products, at the right time, at the right location, at the right price.



Our new facility in Brumath, France.  
For our common success and future growth - „Allez les bleus“

  
**brennenstuhl®**  


– smart technology.

**„He who knows his destination finds the way“**  
Laotse

When he lay the foundations of his company more than 50 years ago, Hugo Brennenstuhl knew his goal. A continuous focus on the needs of the customer and the tireless pursuit of perfection have borne fruit. This is a success story that has continued with the third generation.

You, our customers, are at the heart of our actions. The strong growth of our company requires physical expansion. Whether in Germany or in the world, brennenstuhl® is outgrowing itself. Which is why we need space! Space for the development and implementation of our new ideas. Space for rigorous and modern quality assurance. Space to offer our customers the best possible service.

The growth that makes our expansion needed, we owe to you - and for this we thank you! The expansion of our logistic centre opens up new possibilities and enables new goals. Together with you, we want to shape the future and we look forward to working together.


We hope that you enjoy looking through our new catalogue and new products, which we are sure will offer up many possibilities.



**Hugo Brennenstuhl**  
Managing Director




**Dr. Wolfgang Dehler-Brennenstuhl**  
Managing Director



**Sebastian Brennenstuhl**  
Managing Director





## Power Distribution

- BS 1363
- CEE 110 V
- CEE 400/240 V

7

Power Distribution  
BS / CEE

## Extension Sockets & Plug-in Appliances

- BS 1363
- Lightning & Surge Protection

31

Extension Sockets  
& Plug-in Appliances  
BS / Lightning & Surge Protection

## Power Distribution

- Universal Plug System „Multi-Line“

69

Power Distribution  
Multi-Line

## Extension Sockets

- Universal Plug System „Multi-Line“

73

Extension Sockets  
Multi-Line

## Lighting & Solar Technology

79

Lighting &amp; Solar Technology



## Home Security & Safety

133

Home Security &amp; Safety



## Home, Workshop & DIY

137

Home, Workshop &amp; DIY




## Advertising Media & Displays

149

Advertising Media

## Key to cable quality

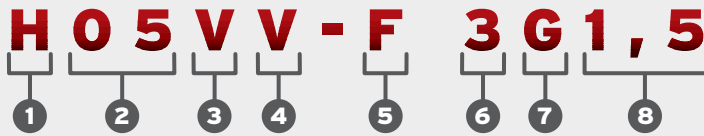

### 1 Definition

- H = Harmonised cable
- A = Nationally recognised cable

### 2 Nominale Voltage (Volt)

- 03 = 300 / 300 V
- 05 = 300 / 500 V
- 07 = 450 / 750 V

### 3 Isolating Sheath

- V = PVC
- R = Natural or synthetic rubber
- S = Silicone rubber
- B = Synthetic rubber

### 4 Outer Sheath

- V = PVC
- R = Natural or synthetic rubber
- N = Neoprene
- J = Glass fibre
- T = Textile
- Q = Polyurethane

### 5 Cable Type

- U = Round, single-wire cable
- R = Round, multi-wire cable
- K = Fine wire for permanent installation
- F = Fine wire for moveable cables
- H = Extremely fine wire for moveable cables
- Y = Tinsel wire

### 6 Number of Wires

### 7 Protected cables

- G = With green-yellow wire
- X = Without green-yellow wire

### 8 Diameter of Cable Core in mm<sup>2</sup>

## The right cable for every use:



**Standard version for normal use in dry conditions.**  
With insulated inner wire coating and outer cable casing made of flexible PVC.



**Standard version for durable use in dry conditions and for temporary outside use.**  
Inner wire coating and outer cable casing made of synthetic rubber.



**BREMAX<sup>®</sup>**

**NO7 cable: For outside use**  
**NOS cable: For temporary outside use.**



Oil resistant. High mechanical loading capacity. Anti-freezing, remains highly flexible down to -35 °C. Outer cable casing made of highly flexible special plastic.



**For long-term outside use.**

Resistant against oils and acids. Inner wire coating made of natural or synthetic rubber. Outer cable casing made of neoprene.



## International Protection Classes

Code letters International Protection		First index figure Foreign bodies protection		Second index figure Water protection	
IP		6		8	
Index		Index		Index	
0	No protection against accidental contact, no protection against solid foreign bodies	0	No protection against water		
1	Protection against contact with any large area by hand and against solid foreign bodies with $\varnothing > 50$ mm	1	Protection against vertical water drops		
2	Protection against contact with the fingers, protection against solid foreign bodies with $\varnothing > 12,5$ mm	2	Protection against diagonal water drops (up to a 15° angle)		
3	Protection against tools, wires or similar objects with $\varnothing > 2,5$ mm, protection against solid foreign bodies with $\varnothing > 2,5$ mm	3	Protection against diagonal water drops (up to a 60° angle)		
4	As 3, but $\varnothing > 1$ mm	4	Protection against splashed water from all directions		
5	Full protection against contact, protection against interior injurious dust deposits	5	Protection against water (out of a nozzle) from all directions		
6	Total protection against contact, protection against penetration of dust	6	Protection against ingress of water in case of powerful water-jets		
		7	Protection against ingress of water in case of temporary immersion		
		8	Protection against ingress of water in case of continuous immersion, requirements under agreement of user and manufacturer		

## Degrees of protection to IEC 529 EN 60529

- IP 20** Protected against access to hazardous parts with a finger
- IP 21** Protected against vertically falling water drops
- IP 23** Protected against spraying water
- IP 40** Protected against solid objects of 1 mm diameter and greater
- IP 43** Protected against solid objects 1 mm and against spraying water
- IP 44** Protected against solid objects 1 mm and against splashing water
- IP 50** Dust-protected
- IP 54** Dust-protected and protected against splashing water
- IP 55** Dust-protected and protected against water-jets
- IP 56** Dust-protected and protected against powerful water-jets
- IP 65** Dust-tight and protected against water-jets
- IP 67** Dust-tight and protected against temporary immersion in water
- IP 68** Dust-tight and protected against continuous immersion in water

### Guaranteed Top Quality

All electrical appliances are manufactured by Brennenstuhl according to strictest quality and safety rules. They correspond to the valid international regulations and are approved by an appropriate authority.

Power Distribution BS / CEE  
 Extension Sockets & Plug-in Appliances BS / Lightning & Surge Protection  
 Power Distribution Multi-Line  
 Extension Sockets Multi-Line  
 Lighting & Solar Technology  
 Home Security & Safety  
 Home, Workshop & DIY  
 Advertising Media



	<p><b>Cable Reels</b> CEE 400/230 V</p>	<p>9</p>	<p>Power Distribution BS / CEE</p>
	<p><b>Cable Reels &amp; Domestic Cable Reels</b> BS</p>	<p>12</p>	<p>Extension Sockets &amp; Plug-In Appliances BS / Lightning &amp; Surge Protection</p>
	<p><b>Power Distribution</b> BS</p>	<p>21</p>	<p>Power Distribution Multi-Line</p>
	<p><b>Cable Reels &amp; Domestic Cable Reels</b> CEE 110 V</p>	<p>23</p>	<p>Extension Sockets Multi-Line</p>
	<p><b>Power Distribution</b> CEE 110 V</p>	<p>27</p>	<p>Lighting &amp; Solar Technology</p>
	<p><b>Power Distribution</b> CEE 400/230 V</p>	<p>29</p>	<p>Home Security &amp; Safety</p>
	<p>Placeholder text.</p>	<p>Placeholder number.</p>	<p>Home, Workshop &amp; DIY</p>
	<p>Placeholder text.</p>	<p>Placeholder number.</p>	<p>Advertising Media</p>



# CABLEPILOT



## The autopilot for cable reels.



### Hands-free transport

Carry reels with ease with the CABLEPILOT, even if you don't have a hand free.



### Practical to hang up

The CABLEPILOT lets you hang the cable reel securely from a scaffold or ladder.



### Super fast, safe roll-up and roll-out

Perfect cable management even when the cable is reeled in quickly; the CABLEPILOT keeps the cable on track.



### Pendulum handle

Cable from the right or left - the CABLEPILOT is flexibly adaptable.



Power Distribution  
BS / CEE

Extension Sockets  
& Plug-in Appliances  
BS / Lightning & Surge Protection

Power Distribution  
Multi-Line

Extension Sockets  
Multi-Line

Lighting & Solar Technology

Home Security & Safety

Home, Workshop & DIY

Advertising Media





## Garant® S CEE 1 IP 44 Cable Reel

Practical and suitable for outdoor use, IP 44.

- Reel body made from rust-resistant and galvanised sheet steel fitted to a particularly sturdy galvanised steel tube frame.
- Innovative and ergonomic cable guide handle „cable pilot“ for perfect cable-management during winding. Handle commutes on both sides and allows easy carrying and cable storage. For right and left handed easy to rewind.
- Rotary handle for comfortable rolling up.
- 1 CEE-plug 400 V/16 A,  
1 CEE-socket 400 V/16 A,  
with 2-way socket outlet 13 A BS with self-closing cover providing protection against dust and contamination.
- CEE-version, water-jet protected.
- RN cable is very robust, oil resistant and especially suited for professional use and on site.
- Earthed sockets connected to separate phases.
- With 3-pin safety cut-out and thermal overload protection.



Article No.	EAN-Code	UP	Cable length	Cable	Cable quality	Cable colour	Reel-Ø	Socket
1 19320 3	630899	1	25 m	H07RN-F 5G2,5	Rubber-Neoprene	Black	320 mm	1 x 400 V/16 A 2 x 13 A BS

Patent pending.



## Garant® CEE 1 IP 44 Cable Reel

Practical and suitable for outdoor use, IP 44.

- Reel body made from special plastic fitted to a galvanised steel tube frame.
- Innovative and ergonomic cable guide handle „cable pilot“ for perfect cable-management during winding. Handle commutes on both sides and allows easy carrying and cable storage. For right and left handed easy to rewind.
- 1 CEE-plug 400 V/16 A,  
1 CEE-socket 400 V/16 A,  
with 2-way socket outlet 13 A BS with self-closing cover providing protection against dust and contamination.
- The **BREMAXX**® cable is extremely sturdy, highly flexible even at low temperature down to -35 °C, oil- and UV-resistant and highly abrasion-resistant.
- Earthed sockets connected to separate phases.
- With 3-pin safety cut-out and thermal overload protection.



Article No.	EAN-Code	UP	Cable length	Cable	Cable quality	Cable colour	Reel-Ø	Socket
1 18277 3	630882	1	25 m	AT-N07V3V3-F 5G1,5	<b>BREMAXX</b> ®	Red	290 mm	1 x 400 V/16 A 2 x 13 A BS

Patent pending.



### Garant® CEE 2 IP 44 Cable Reel for Site & Industry

For universal outdoor use and permanent use on sites, IP 44.

- Tested acc. to EN 61316.
- Reel body made from special plastic fitted to a galvanised steel tube frame.
- Innovative and ergonomic cable guide handle „cable pilot“ for perfect cable-management during winding. Handle commutes on both sides and allows easy carrying and cable storage. For right and left handed easy to rewind.
- RN cable is approved to exacting site standards as per VDE 0100 part 704.
- CEE plug 230 V/16 A,  
2 CEE sockets 230 V/16 A.
- With single pole safety cut-off and overheating protection.



Article No.	EAN-Code	UP	Cable length	Cable	Cable quality	Cable colour	Reel-Ø
1 18276 0	140572	1	25 m	H07RN-F 3G2,5	Rubber-Neoprene	Black	290 mm

Design protected. / Patent pending.



### Garant® CEE 2 IP 44 Cable Reel

For constant use outdoors, IP 44.

- Reel body made from special plastic fitted to a galvanised steel tube frame.
- CEE plug 230 V/16 A,  
2 CEE sockets 230 V/16 A.
- Innovative and ergonomic cable guide handle „cable pilot“ for perfect cable-management during winding. Handle commutes on both sides and allows easy carrying and cable storage. For right and left handed easy to rewind.
- The **BREMAXX**® cable is extremely sturdy, highly flexible even at low temperature down to -35 °C, oil- and UV-resistant and highly abrasion-resistant.
- With thermal cut-out protection against overheating or overload.



Article No.	EAN-Code	UP	Cable length	Cable	Cable quality	Cable colour	Reel-Ø	Nominal current
1 23807 3	081165	1	40 m	AT-N07V3V3-F 3G2,5	<b>BREMAXX</b> ®	Orange	320 mm	16 A

Design protected. / Patent pending.



## Adapter 230 V/CEE



- Plug: CEE 16 A, 200 - 250 V, 50/60 Hz.
- Socket: BS 13 A, 240 V, 50/60 Hz, IP 54, childproof.



**NEW**

Article No.	EAN-Code	UP	Plug	Socket	Equipment
1 08099 3	648221	1	CEE 16 A, 200 - 250 V, 50/60 Hz	BS 13 A, 240 V, 50/60 Hz, IP 54	with childproof socket
2 1 08099 0	648207	1	CEE 16 A, 230 V, 50/60 Hz	Schuko 16 A, 230 V, 50/60 Hz, IP 44	with childproof socket



## Garant® G CEE IP 44 Cable Reel For Camping/Yacht Marina

Practical and suitable for outdoor use, IP 44.

- CEE plug 230 V/16 A.
- CEE socket 230 V/16 A.
- Extension cable reel with plug and trailing socket.
- Innovative and ergonomic cable guide handle „cable pilot“ for perfect cable-management during winding. Handle commutes on both sides and allows easy carrying and cable storage. For right and left handed easy to rewind.
- Rotary handle for comfortable rolling up.
- Reel body made from special plastic fitted to a galvanised steel tube frame.
- The **BREMAXX**® cable is extremely sturdy, highly flexible even at low temperature down to -35 °C, oil- and UV-resistant and highly abrasion-resistant.
- Thermal cut-out protection, indicator shows overheating or overloading.



Article No.	EAN-Code	UP	Cable length	Cable	Cable quality	Cable colour	Reel-Ø
1 18245 0	190034	1	20 m	AT-N07V3V3-F 3G2,5	<b>BREMAXX</b> ®	Orange	290 mm

Design protected. / Patent pending.

Power Distribution  
CEE

Extension Sockets  
& Plug-In Appliances  
BS / Lightning & Surge Protection

Power Distribution  
Multi-Line

Extension Sockets  
Multi-Line

Lighting & Solar Technology

Home Security & Safety

Home, Workshop & DIY

Advertising Media



### Brobusta® Cable Reel

Quality for the highest demands.

- Extra heavy-duty, double welded steel-tube frame, galvanised & powder-coated, with ergonomic carrying handle.
- Drum is made of special highly breakproof plastic.
- All electrical parts are safety insulated from the reel body.
- With 3-way socket outlet 13 A BS with self-closing cover providing protection against dust and contamination.
- Thermal cut-out protection, indicator shows overheating or overloading.



Article No.	EAN-Code	UP	Cable length	Cable	Cable quality	Cable colour	Reel-Ø	Nominal current	Plug
1 31130 3	058105	1	50 m	H05VV-F 3G1,5	Plastic	Black	290 mm	13 A	BS 1363

Design Patent.



### Super-Solid Cable Reel

Quality for the highest demands.

- Extra stable, shock-absorbing steel tube frame with galvanised steel tube, exclusive stability.
- Carry handle with comfortable cable guide management during winding.
- Rotary handle for comfortable rolling up.
- Reel body made of special plastic with reinforced ribbed structure.
- With 3-way socket outlet 13 A BS with self-closing cover providing protection against dust and contamination.
- With thermal cut-out protection against overheating or overload.



Article No.	EAN-Code	UP	Cable length	Cable	Cable quality	Cable colour	Reel-Ø	Nominal current	Plug
1 30895 3	576500	1	50 m	H05VV-F 3G1,5	Plastic	Black	290 mm	13 A	BS 1363

Patent pending.



### Super-Solid S Cable Reel

Quality for the highest demands.

- Extra stable, shock-absorbing steel tube frame with galvanised steel tube, exclusive stability.
- Reel body made from rust-resistant and galvanised sheet steel.
- Carry handle with comfortable cable guide management during winding.
- Rotary handle for comfortable rolling up.
- All electrical parts are safety insulated from the reel body.
- With 3-way socket outlet 13 A BS with self-closing cover providing protection against dust and contamination.
- With thermal cut-out protection against overheating or overload.



Article No.	EAN-Code	UP	Cable length	Cable	Cable quality	Cable colour	Reel-Ø	Nominal current	Plug
1 30945 3	612017	1	50 m	H05VV-F 3G1,5	Plastic	Black	290 mm	13 A	BS 1363

Patent pending.



### Garant® Cable Reel

Top in quality and design, for every requirement and use.

- Reel body made from special plastic fitted to a galvanised steel tube frame.
- Innovative and ergonomic cable guide handle „cable pilot“ for perfect cable-management during winding. Handle commutes on both sides and allows easy carrying and cable storage. For right and left handed easy to rewind.
- Rotary handle for comfortable rolling up.
- The **BREMAXX**® cable is extremely sturdy, highly flexible even at low temperature down to -35 °C, oil- and UV-resistant and highly abrasion-resistant.
- With 3-way socket outlet 13 A BS with self-closing cover providing protection against dust and contamination.
- With thermal cut-out protection against overheating or overload.



Article No.	EAN-Code	UP	Cable length	Cable	Cable quality	Cable colour	Reel-Ø	Nominal current	Plug
1 20834 3	626625	1	40 m	AT-N07V3V3-F 3G2,5	<b>BREMAXX</b> ®	Orange	290 mm	13 A	BS 1363

Design protected. / Patent pending.

## Garant® Cable Reel

Top in quality and design, for every requirement and use.

- Reel body made from special plastic fitted to a galvanised steel tube frame.
- With 3-way socket outlet 13 A BS with self-closing cover providing protection against dust and contamination.
- Ergonomic cable guide handle for perfect cable-management during winding.
- With thermal cut-out protection against overheating or overload.



Article No.	EAN-Code	UP	Cable length	Cable	Cable quality	Reel-Ø	Cable colour	Nominal current	Plug
<b>1 20801 3</b>	118977	1		without cable		290 mm		13 A	
<b>1.5 mm² cable</b>									
<b>1 21805 3</b>	017584	1	25 m	H05VV-F 3G1,5	Plastic	240 mm	Black	13 A	BS 1363
<b>1 20806 3</b>	017591	1	50 m	H05VV-F 3G1,5	Plastic	290 mm	Black	13 A	BS 1363
<b>2.5 mm² cable</b>									
<b>1 20811 3</b>	118984	1	20 m	H05VV-F 3G2,5 extra heavy-duty cable	Plastic	240 mm	Black	13 A	BS 1363
<b>1 20812 3</b>	118991	1	40 m	H05VV-F 3G2,5 extra heavy-duty cable	Plastic	290 mm	Black	13 A	BS 1363
<b>RCD-plug 30 mA</b>									
<b>1 21875 3</b>	133000	1	25 m	H05VV-F 3G1,5	Plastic	240 mm	Black	13 A	RCD-plug 30 mA

Design protected. / Patent pending.



Power Distribution  
BS

Extension Sockets  
& Plug-in Appliances  
BS / Lightning & Surge Protection

Power Distribution  
Multi-Line

Extension Sockets  
Multi-Line

Lighting & Solar Technology

Home Security & Safety

Home, Workshop & DIY

Advertising Media



With Bretec® non-turning socket system. Socket outlet remains stationary while reel body rotates. Prevents the cable of appliances connected from twisting while winding.

### Garant® Bretec® Cable Reel

With the unique Bretec® Anti Cable Twist System for comfortable working.

- No more dangerous twisting of connected appliances when winding or unwinding.
- Reel body made from special plastic fitted to a galvanised steel tube frame.
- Innovative and ergonomic cable guide handle „cable pilot“ for perfect cable-management during winding. Handle commutes on both sides and allows easy carrying and cable storage. For right and left handed easy to rewind.
- Rotary handle for comfortable rolling up.
- With 3-way socket outlet 13 A BS with self-closing cover providing protection against dust and contamination.
- With thermal cut-out protection against overheating or overload.



Power Distribution  
BS

Extension Sockets  
& Plug-In Appliances  
BS / Lightning & Surge Protection

Power Distribution  
Multi-Line

Extension Sockets  
Multi-Line

Lighting & Solar Technology

Home Security & Safety

Home, Workshop & DIY

Advertising Media



Article No.	EAN-Code	UP	Cable length	Cable	Cable quality	Cable colour	Reel-Ø	Nominal current	Plug
1 20885 3	054893	1	25 m	H05VV-F 3G1,5	Plastic	Red	240 mm	13 A	BS 1363
1 20886 3	054909	1	50 m	H05VV-F 3G1,5	Plastic	Red	290 mm	13 A	BS 1363

Design protected. / Patent pending.



With Bretec® non-turning socket system. Socket outlet remains stationary while reel body rotates. Prevents the cable of appliances connected from twisting while winding.

### Garant® S Bretec® Cable Reel

With the unique Bretec® Anti Cable Twist System for comfortable working.

- With the unique Bretec® Anti Cable Twist System for comfortable working.
- Reel body made from rust-resistant and galvanised sheet steel.
- Innovative and ergonomic cable guide handle „cable pilot“ for perfect cable-management during winding. Handle commutes on both sides and allows easy carrying and cable storage. For right and left handed easy to rewind.
- Rotary handle for comfortable rolling up.
- With 3-way socket outlet 13 A BS with self-closing cover providing protection against dust and contamination.
- With thermal cut-out protection against overheating or overload.



Article No.	EAN-Code	UP	Cable length	Cable	Cable quality	Cable colour	Reel-Ø	Nominal current	Plug
1 19886 3	612376	1	50 m	H05VV-F 3G1,5	Plastic	Black	290 mm	13 A	BS 1363

Patent pending.



### Garant® S Cable Reel

Top in quality and design, for every requirement and use.

- Reel body made from rust-resistant and galvanised sheet steel.
- Innovative and ergonomic cable guide handle „cable pilot“ for perfect cable-management during winding. Handle commutes on both sides and allows easy carrying and cable storage. For right and left handed easy to rewind.
- Rotary handle for comfortable rolling up.
- The **BREMAXX®** cable is extremely sturdy, highly flexible even at low temperature down to -35 °C, oil- and UV-resistant and highly abrasion-resistant.
- With 3-way socket outlet 13 A BS with self-closing cover providing protection against dust and contamination.
- With thermal cut-out protection against overheating or overload.



Article No.	EAN-Code 4007123...	UP	Cable length	Cable	Cable quality	Cable colour	Reel-Ø	Nominal current	Plug
1 19983 3	626632	1	50 m	AT-N05V3V3-F 3G1,5	<b>BREMAXX®</b>	Blue	290 mm	13 A	BS 1363

Patent pending.



### Garant® S Cable Reel

Top in quality and design, for every requirement and use.

- Reel body made from rust-resistant and galvanised sheet steel.
- With 3-way socket outlet 13 A BS with self-closing cover providing protection against dust and contamination.
- Ergonomic cable guide handle for perfect cable-management during winding.
- Thermal cut-out protection, indicator shows overheating or overloading.
- With hinged rotary handle for comfortable rolling up.



Article No.	EAN-Code 4007123...	UP	Cable length	Cable	Cable quality	Cable colour	Reel-Ø	Nominal current	Plug
1 19801 3	142026	1		without cable			290 mm	13 A	
<b>1.5 mm² cable</b>									
1 19805 3	133017	1	25 m	H05VV-F 3G1,5	Plastic	Black	240 mm	13 A	BS 1363
1 19806 3	133024	1	50 m	H05VV-F 3G1,5	Plastic	Black	290 mm	13 A	BS 1363
<b>2.5 mm² cable</b>									
1 19811 3	133031	1	20 m	H05VV-F 3G2,5 extra heavy-duty cable	Plastic	Black	240 mm	13 A	BS 1363
1 19809 3	166572	1	40 m	H05VV-F 3G2,5 extra heavy-duty cable	Plastic	Black	290 mm	13 A	BS 1363

Patent pending.





### Standard AK 260 Cable Reel

- Reel body made of break-resistant plastic.
- Robust, galvanised steel tube frame.
- With 3-way socket outlet 13 A BS with self-closing cover providing protection against dust and contamination.
- With thermal cut-out protection against overheating or overload.

Power Distribution  
BS

Extension Sockets  
& Plug-In Appliances  
BS / Lightning & Surge Protection

Power Distribution  
Multi-Line

Extension Sockets  
Multi-Line

Lighting & Solar Technology

Home Security & Safety

Home, Workshop & DIY

Advertising Media



Article No.	EAN-Code 4007123...	UP	Packaging	Cable length	Cable	Cable quality	Cable colour	Reel-Ø	Nominal current	Plug
1 09825 3 001	140817	1	Single boxed	25 m	05VV-F 3G1,25	Plastic	Black	260 mm	13 A	BS 1363
1 09825 3 027	140800	27	Unboxed pallet	25 m	05VV-F 3G1,25	Plastic	Black	260 mm	13 A	BS 1363
1 09841 3 001	147540	1	Single boxed	50 m	05VV-F 3G1,25	Plastic	Black	260 mm	13 A	BS 1363

Design protected.



### Compact AK 180 Cable Reel

- With 3-way socket outlet 13 A BS with self-closing cover providing protection against dust and contamination.
- Galvanized steel tube frame.
- Small and handy reel, fits in most tool boxes.
- With thermal cut-out protection against overheating or overload.



Article No.	EAN-Code 4007123...	UP	Cable length	Cable	Cable quality	Cable colour	Reel-Ø	Nominal current	Plug
1 07818 3 004	140787	4	15 m	H05VV-F 3G1,5	Plastic	Black	180 mm	13 A	BS 1363

Design protected.



### Garant® G Cable Reel

For mobile working with electrical garden tools.

- Reel body made from special plastic fitted to a galvanised steel tube frame.
- Ergonomic cable guide handle for perfect cable-management during winding.
- With rubber socket 240 V.
- Thermal cut-out protection, indicator shows overheating or overloading.
- E.g. for use when operating lawn mowers, hedgecutters, electric strimmers, trimmers etc, when working at height, or carrying out work across a large area.
- For mobile working of a large radius, reel remains next to the power source connected to.



Article No.	EAN-Code 4007123...	UP	Cable length	Cable	Cable quality	Cable colour	Reel-Ø	Nominal current	Plug
1 14174 3	140893	1	25 m	H05VV-F 3G1,25	Plastic	Blue	240 mm	13 A	BS 1363

Design protected. / Patent pending.



### Automatic Rewind Cable Reel

Convenient automatic rewind.

- For fitting on walls and ceilings.
- Slewable up to 180°.
- Robust plastic housing.
- With safety cut-out.
- Childproof socket.
- For safe storage of the cable after use.
- Cable quality: - PVC cable or - rubber-neoprene (RN), robust, oil-resistant and especially suited for professional use.
- In colourful display-packaging.



Article No.	EAN-Code 4007123...	UP	Cable length	Cable	Cable quality	Cable colour	Nominal current	Plug
1 24102 3 300	621705	1	9 + 2 m	H05VV-F 3G1,5	Plastic	Black	13 A	BS 1363
1 24100 3 300	621699	1	16 + 2 m	H07RN-F 3G1,5 oil resistant	Rubber-Neoprene	Black	13 A	BS 1363



## Hanging Workshop Energy Cube

A height-adjustable power distributor with suspension facility.



- Housing made of break-resistant plastic.
- With double-sided, triple socket outlet 13 A BS and a hook for large tools.
- 3 m galvanised steel chain for hanging.
- With thermal cut-out protection against overheating or overload.
- 5 m connecting cable.

Article No.	EAN-Code	UP	Cable length	Cable	Cable quality	Cable colour	Nominal current	Socket
1 15176 3	049325	1	5 m	H05VV-F 3G1,5	Plastic	Black	13 A	2 x 3 BS 1363

Design protected.

## Primera-Line Cable Box

A compact, handy cable reel for home, office and DIY.



- Compact design, for comfortable handling.
- Practical carrying handle.
- Variable use, standing or flat.
- Robust, rigid construction.
- With 3-way socket outlet 13 A BS with self-closing cover providing protection against dust and contamination.
- With thermal cut-out protection against overheating or overload.

Article No.	EAN-Code	UP	Cable length	Cable	Cable quality	Cable colour	Colour	Nominal current	Plug
1 09545 3	598212	2	10 m	H05VV-F 3G1,5	Plastic	Black	Black/Light Grey	13 A	BS 1363

Design protected.

Power Distribution  
BS

Extension Sockets  
& Plug-In Appliances  
BS / Lightning & Surge Protection

Power Distribution  
Multi-Line

Extension Sockets  
Multi-Line

Lighting & Solar Technology

Home Security & Safety

Home, Workshop & DIY

Advertising Media



## Vario-Line Cable Box

A compact, handy cable reel for home, office and DIY.

- Housing made of break-resistant plastic.
- Practical carrying handle.
- Twin feet ensure excellent stability.
- Easy to wind and rewind.
- With 3-way socket outlet 13 A BS with self-closing cover providing protection against dust and contamination.
- With thermal cut-out protection against overheating or overload.



Article No.	EAN-Code 4007123...	UP	Cable length	Cable	Cable quality	Cable colour	Colour	Nominal current	Plug
<b>1.5 mm<sup>2</sup> cable</b>									
1 09820 3	133048	5	5 m	H05VV-F 3G1,5	Plastic	Black	Blue	13 A	BS 1363
1 10856 3	140831	5	10 m	H05VV-F 3G1,5	Plastic	Black	Blue	13 A	BS 1363
1 09320 3	641482	5	10 m	H05VV-F 3G1,5	Plastic	Black	Black	13 A	BS 1363
1 10890 3	140848	5	15 m	H05VV-F 3G1,5	Plastic	Black	Blue	13 A	BS 1363
1 09420 3	641468	5	10 m	H05VV-F 3G1,5	Plastic	Black	Black	13 A	BS 1363
<b>1.0 mm<sup>2</sup> cable</b>									
1 10855 3	147595	5	10 m	H05VV-F 3G1,0	Plastic	Black	Grey	10 A	BS 1363
1 10820 3	142019	5	20 m	H05VV-F 3G1,0	Plastic	Black	Grey	10 A	BS 1363



## Comfort-Line Cable Box CL-S

Desk socket for home & office.

- Ergonomic design with a functional and practical rewind ring for easy handling.
- With 3-way socket outlet 13 A BS with self-closing cover providing protection against dust and contamination.
- With thermal cut-out protection against overheating or overload.

Article No.	EAN-Code 4007123...	UP	Cable length	Cable	Cable quality	Cable colour	Colour	Nominal current	Plug
<b>1.25 mm<sup>2</sup> cable</b>									
1 10912 3	045815	4	3 m	05VV-F 3G1,25	Plastic	Black	Black/White	13 A	BS 1363
<b>1.5 mm<sup>2</sup> cable</b>									
1 10922 3	637195	4	3 m	H05VV-F 3G1,5	Plastic	Black	Black/White	13 A	BS 1363
1 10923 3	641505	4	3 m	H05VV-F 3G1,5	Plastic	Black	Black/Blue	13 A	BS 1363

Design protected.



### 4-Way Powerblock With Extension Cable

- Extension lead with a 4-socket Powerblock made of impact- and break-resistant plastic.
- With foldable metal hanging hook.
- Sockets in 45° arrangement with self-closing covers.
- With self-closing cover providing protection against dust and contamination.



Article No.	EAN-Code 4007123...	UP	Cable length	Cable	Cable quality	Cable colour	Nominal current	Plug
1 16820 3	190720	3	5 m	05VV-F 3G1,25	Plastic	Blue	13 A	BS 1363
1 16821 3	190737	3	14 m	05VV-F 3G1,25	Plastic	Blue	13 A	BS 1363

Power Distribution  
BS

Extension Sockets  
& Plug-In Appliances  
BS / Lightning & Surge Protection

Power Distribution  
Multi-Line

Extension Sockets  
Multi-Line

Lighting & Solar Technology

Home Security & Safety

Home, Workshop & DIY

Advertising Media



### Extension Cable

- With rubberized socket 13 A BS.



Article No.	EAN-Code 4007123...	UP	Cable length	Cable	Cable quality	Cable colour	Nominal current	Plug
1 16650 3	105915	10	14 m	05VV-F 3G1,25	Plastic	Blue	13 A	BS 1363
1 16654 3	619870	5	25 m	05VV-F 3G1,25	Plastic	Blue	13 A	BS 1363



### Extension Cable

For home & office.

- With rubberized socket 13 A BS.



Article No.	EAN-Code 4007123...	UP	Cable length	Cable	Cable quality	Cable colour	Nominal current	Plug
1 16655 3	619900	10	2 m	05VV-F 3G1,25	Plastic	White	13 A	BS 1363
1 16656 3	619924	10	3 m	05VV-F 3G1,25	Plastic	White	13 A	BS 1363
1 16657 3	619948	10	5 m	05VV-F 3G1,25	Plastic	White	13 A	BS 1363



Power Distribution  
BS



## Safe-Box BIG IP 44

For extra safety when connecting cables, even outdoors, IP 44.

- Extra large Safe-Box for safe connection of plug and socket and to protect from damp.
- Ideal for particularly large plugs and sockets, especially larger export versions.
- Most suitable for use when camping, mowing the lawn, for seasonal or Christmas lighting, or when working with electrical equipment outdoors.
- Recommended as additional protection for small children as well.



Extension Sockets  
& Plug-in Appliances  
BS / Lightning & Surge Protection

Article No.	EAN-Code	UP
	4007123...	
<b>1 16044 0</b>	170784	10

Power Distribution  
Multi-Line



## Circuit Breaker Plug BDI-S 30 (RCD)

The ideal safety circuit breaker for connection to frequently used electrical appliances.

- Provides effective protection against electric shocks. Instantly disconnects the live lead from the mains as soon as residual current is present.
- 2-pole cut-out.
- In blister packaging.



Extension Sockets  
Multi-Line

Article No.	EAN-Code	UP	Nominal voltage	Nominal current	Residual current	Feature	Plug
	4007123...						
<b>1 29064 3</b>	593828	1	240 V	13 A	30 mA	for cable 3G1.5-cable	BS 1363

Lighting & Solar Technology



## Circuit Breaker Adapter BDI-A 30 (RCD)

Transferable adapter, protects users of power tools, domestic appliances, etc. against electrical hazards.

- Provides effective protection against electric shocks. Instantly disconnects the live lead from the mains as soon as residual current is present.
- 2-pole cut-out.
- In blister packaging.



Home Security & Safety

Article No.	EAN-Code	UP	Nominal voltage	Nominal current	Residual current	Plug
	4007123...					
<b>1 29063 3</b>	593804	1	240 V	13 A	30 mA	BS 1363

Home, Workshop & DIY

Advertising Media



## Brobusta® 110 V CEE 2 Cable Reel

Quality for the highest demands.

- Extra heavy-duty, double welded steel-tube frame, galvanised & powder-coated, with ergonomic carrying handle.
- Reel body made of special break-resistant Breflex rubber.
- With twin socket 110 V/16 A.
- With thermal cut-out protection against overheating or overload.
- Feature: extra heavy-duty cable



Article No.	EAN-Code	UP	Cable length	Cable	Cable quality	Cable colour	Reel-Ø	Nominal current	Plug
1 31885 3	140961	1	40 m	H05VV-F 3G2,5	Plastic	Yellow	290 mm	16 A	110 V

Design protected.



## Super-Solid 110 V CEE 2 Cable Reel

- Extra stable, shock-absorbing steel tube frame with galvanised steel tube, exclusive stability.
- Carry handle with comfortable cable guide management during winding.
- Reel body made of special plastic with reinforced ribbed structure.
- With twin socket 110 V/16 A.
- With thermal cut-out protection against overheating or overload.



Article No.	EAN-Code	UP	Cable length	Cable	Cable quality	Cable colour	Reel-Ø	Nominal current	Plug
1 30895 3 110	576517	1	50 m	H05VV-F 3G1,5	Plastic	Yellow	290 mm	16 A	110 V

Patent pending.

Power Distribution  
CEE

Extension Sockets  
& Plug-In Appliances  
BS / Lightning & Surge Protection

Power Distribution  
Multi-Line

Extension Sockets  
Multi-Line

Lighting & Solar Technology

Home Security & Safety

Home, Workshop & DIY

Advertising Media



### Garant® S 110 V CEE 2 Cable Reel

The robust cable reel made of rust-resistant, hot-dip galvanised steel sheet.

- With twin socket 110 V/16 A.
- Robust, galvanised steel tube frame.
- Ergonomic cable guide handle for perfect cable-management during winding.
- With thermal cut-out protection against overheating or overload.



Article No.	EAN-Code 4007123...	UP	QTY, pallet	Cable length	Cable	Cable colour	Reel-Ø	Nominal current	Plug
<b>1 19807 3</b>	140916	1	45	25 m	H05VV-F 3G1,5	Yellow	240 mm	16 A	110 V

Patent pending.



### Garant® 110 V CEE 2 Cable Reel

Top in quality and design, for every requirement and use.

- No more dangerous twisting of connected appliances when winding or unwinding.
- No more plugging in or out when moving the cable reel.
- Avoids unnecessary actions!
- Reel body made from special break-resistant Brefflexx rubber fitted to a galvanised steel tube frame.
- With twin socket 110 V/16 A.
- Ergonomic cable guide handle for perfect cable-management during winding.
- With thermal cut-out protection against overheating or overload.



Article No.	EAN-Code 4007123...	UP	Cable length	Cable	Cable quality	Cable colour	Reel-Ø	Nominal current	Plug
<b>1 14877 3</b>	140909	1	25 m	H05VV-F 3G1,5	Plastic	Yellow	240 mm	16 A	110 V
<b>1 13887 3</b>	140879	1	50 m	H05VV-F 3G1,5	Plastic	Yellow	290 mm	16 A	110 V
<b>1 13195 3</b>	059805	1	25 m	H05VV-F 3G2,5 extra heavy-duty cable	Plastic	Yellow	240 mm	16 A	110 V

Design protected. / Patent pending.





With Bretec® non-turning socket system. Socket outlet remains stationary while reel body rotates. Prevents the cable of appliances connected from twisting while winding.

## Garant® Bretec® 110 V CEE 2 Cable Reel

With the unique Bretec® Anti Cable Twist System for comfortable working.

- No more dangerous twisting of connected appliances when winding or unwinding.
- No more plugging in or out when moving the cable reel.
- Avoids unnecessary actions!
- With twin socket 110 V/16 A.
- Innovative and ergonomic cable guide handle „cable pilot“ for perfect cable management during winding. Handle commutes on both sides and allows easy carrying and cable storage. For right and left handed easy to rewind.
- With thermal cut-out protection against overheating or overload.

The one has got a Bretec:  
the other's got a mess.



**CABLEPILOT**



Article No.	EAN-Code	UP	Cable length	Cable	Cable quality	Cable colour	Reel-Ø	Nominal current	Plug
1 14885 3	140923	1	25 m	H05VV-F 3G1,5	Plastic	Yellow	240 mm	16 A	110 V

Design protected. / Patent pending.

## Easy working by clever features!

### BRETEC®-System



### Trouble-free unrolling without cable spaghetti

With Bretec® rotary contact technology the reel body turns, and the drum centre stays still.

This special system allows winding, even with connected appliances.



Ohne / without BRETEC®



Mit / with BRETEC®

## Standard AK 260 110 V CEE 2 Cable Reel



- Reel body made from special plastic fitted to a galvanised steel tube frame.
- Robust, galvanised steel tube frame.
- With twin socket 110 V/16 A.
- Thermal cut-out protection, indicator shows overheating or overloading.



Article No.	EAN-Code 4007123...	UP	Cable length	Cable	Cable quality	Cable colour	Reel-Ø	Nominal current	Plug
<b>1 09874 3</b>	141067	1	25 m	H05VV-F 3G1,5	Plastic	Yellow	260 mm	16 A	110 V
<b>1 09878 3</b>	616046	1	50 m	H05VV-F 3G1,5	Plastic	Yellow	260 mm	16 A	110 V

Design protected.



## Automatic Rewind Cable Reel 110 V CEE IP 44

Convenient automatic rewind.

- For fitting on walls and ceilings.
- Slewable up to 180°.
- Robust plastic housing.
- With safety cut-out.
- CEE socket 110 V.
- For safe storage of the cable after use.
- Cable quality: Rubber-neoprene (RN), robust, oil-resistant and especially suited for professional use.
- In colourful display-packaging.



Article No.	EAN-Code 4007123...	UP	Cable length	Cable	Cable quality	Cable colour	Nominal current	Plug
<b>1 24100 3 110</b>	622580	1	16 + 2 m	H07RN-F 3G1,5 oil resistant	Rubber-Neoprene	Black	16 A	110 V
<b>1 24101 3 110</b>	635740	1	9 + 2 m	H07RN-F 3G1,5 oil resistant	Rubber-Neoprene	Black	16 A	110 V



## Splitter Box CEE 4

A robust 4 socket power distributor for multi-purpose use.

- Casing made of break-resistant special plastic, with 2 holes on either side suitable for wall-mounting.
- Slots around the body allow cable to be wound.
- With 4 sockets 110 V/16 A.



Article No.	EAN-Code 4007123...	UP	Cable length	Cable	Cable quality	Cable colour	Nominal current	Socket	Plug
1 15141 3	014057	3	2 m	H05VV-F 3G2,5	Plastic	Yellow	16 A	4 x CEE 110 V	110 V



## Primera-Line Cable Box 110 V CEE 2

- Compact design, for comfortable handling.
- Practical carrying handle.
- Variable use, standing or flat.
- Robust, rigid construction.
- With twin socket outlet 110 V with selfclosing cover providing protection against dust and contamination.



Article No.	EAN-Code 4007123...	UP	Cable length	Cable	Cable quality	Cable colour	Colour	Nominal current	Plug
1 09545 3 110	598380	2	10 m	H05VV-F 3G1,5	Plastic	Black	Black/Light Grey	16 A	110 V



## Extension Cable With 4-Way Powerblock

- Top quality, with break-resistant plastic housing.
- With foldable metal hanging hook.
- With 4 sockets 110 V/16 A.



Article No.	EAN-Code	UP	Cable length	Cable	Cable quality	Cable colour	Nominal current	Plug
1 16630 3 110	174324	3	14 m	H05VV-F 3G1,5	Plastic	Yellow	16 A	110 V



## Extension Cable CEE 110 V



Article No.	EAN-Code	UP	Cable length	Cable	Cable quality	Cable colour	Nominal current	Plug
1 16646 3	081288	10	14 m	H05VV-F 3G1,5	Plastic	Yellow	16 A	110 V
1 16846 3	109968	8	14 m	H05VV-F 3G2,5	Plastic	Yellow	16 A	110 V

Power Distribution  
CEE

Extension Sockets  
& Plug-in Appliances  
BS / Lightning & Surge Protection

Power Distribution  
Multi-Line

Extension Sockets  
Multi-Line

Lighting & Solar Technology

Home Security & Safety

Home, Workshop & DIY

Advertising Media



### CEE Extension Cable IP 44

For universal outdoor use and permanent use on sites, IP 44.

- Ideal for hard outdoor use.
- Special rubber extension cable with CEE-socket and plug with cap.



Article No.	EAN-Code	UP	Cable length	Cable	Cable quality	Cable colour	Plug	Socket	Number of poles
<b>1.5 mm<sup>2</sup> cable</b>									
1 16771 0	005796	1	10 m	H07RN-F 5G1,5	Rubber-Neoprene	Black	CEE 400 V/16 A	CEE 400 V/16 A	5
1 16773 0	005826	1	30 m	H07RN-F 5G1,5	Rubber-Neoprene	Black	CEE 400 V/16 A	CEE 400 V/16 A	5
<b>2.5 mm<sup>2</sup> cable</b>									
1 16774 0	018239	1	10 m	H07RN-F 5G2,5	Rubber-Neoprene	Black	CEE 400 V/16 A	CEE 400 V/16 A	5
1 16772 0	021550	1	25 m	H07RN-F 5G2,5	Rubber-Neoprene	Black	CEE 400 V/16 A	CEE 400 V/16 A	5
<b>4.0 mm<sup>2</sup> cable</b>									
1 16797 0	029112	1	10 m	H07RN-F 5G4,0	Rubber-Neoprene	Black	CEE 400 V/32 A	CEE 400 V/32 A	5
1 16850 0	190867	1	25 m	H07RN-F 5G4,0	Rubber-Neoprene	Black	CEE 400 V/32 A	CEE 400 V/32 A	5



### BREMAXX® CEE Extension Cable IP 44

Practical and suitable for outdoor use, IP 44.

- BREMAXX® cable - anti-freezing, highly flexible down to -35 °C, oil and UV resistant, high mechanical loading capacity.
- Excellent abrasion resistance.



Article No.	EAN-Code	UP	Cable length	Cable	Cable quality	Cable colour	Plug	Socket	Number of poles
1 16858 0	151929	1	10 m	AT-N07V3V3-F 5G1,5	BREMAXX®	Signal red	CEE 400 V/16 A	CEE 400 V/16 A	5
1 16859 0	151936	1	25 m	AT-N07V3V3-F 5G1,5	BREMAXX®	Signal red	CEE 400 V/16 A	CEE 400 V/16 A	5

## CEE 230 V Extension Cable IP 44

For site, industrial use, camping and yacht/marina, IP 44.

- Ideal for hard outdoor use.
- Special rubber extension cable with CEE-socket and plug with cap.




**NEW**

**MADE IN GERMANY**



Article No.	EAN-Code	UP	Cable length	Cable	Cable quality	Cable colour	Plug	Socket
<b>1.5 mm<sup>2</sup> cable</b>								
<b>1 16765 0 110</b>	650781	2	10 m	H07RN-F 3G1,5	Rubber-Neoprene	Black	CEE 230 V/16 A	CEE 230 V/16 A
<b>2.5 mm<sup>2</sup> cable</b>								
<b>1 16765 0 210</b>	650798	2	10 m	H07RN-F 3G2,5	Rubber-Neoprene	Black	CEE 230 V/16 A	CEE 230 V/16 A
<b>1 16765 0 225</b>	650866	2	25 m	H07RN-F 3G2,5	Rubber-Neoprene	Black	CEE 230 V/16 A	CEE 230 V/16 A

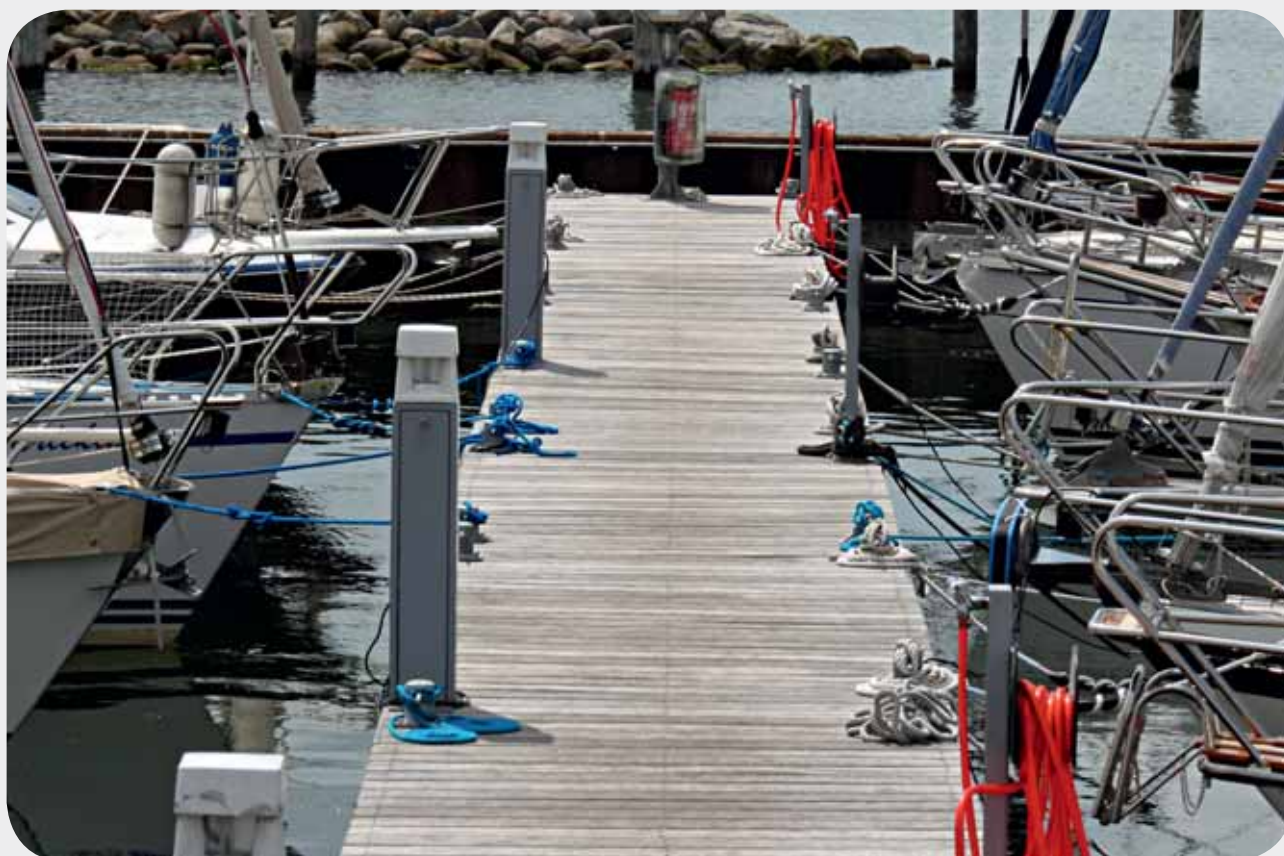

Power Distribution  
CEE

Extension Sockets  
& Plug-in Appliances  
BS / Lightning & Surge Protection

Power Distribution  
Multi-Line

Extension Sockets  
Multi-Line

Lighting & Solar Technology

Home Security & Safety

Home, Workshop & DIY

Advertising Media



**Extension Sockets**  
BS With Surge Protection

**32**

Power Distribution  
BS / CEE

**Extension Sockets FB**  
BS With Safety Fuse Button

**37**

Extension Sockets  
BS / Lightning & Surge Protection

**Extension Sockets**  
BS

**44**

Power Distribution  
Multi-Line

Extension Sockets  
Multi-Line

Lighting & Solar Technology

Home Security & Safety

Home, Workshop & DIY

Advertising Media

Power Distribution  
BS / CEE

Extension Sockets  
Lightning & Surge Protection

Power Distribution  
Multi-Line

Extension Sockets  
Multi-Line

Lighting & Solar Technology

Home Security & Safety

Home, Workshop & DIY

Advertising Media



## Premium-Line 30.000 A Extension Socket With Surge Protection And USB-Charger

- Protection for your appliance from malfunctions in the mains, such as surges, indirect lightning strikes or circuit noises, with a maximum sum of leakage current of up to 30.000 A.
- Suppresses visual and acoustic interference in TV sets, video recorders and audio systems.
- Protects sensitive electronics from high frequency interference voltages.
- Light indicating surge voltage is active.
- Illuminated 2-pole safety switch.
- 2 USB-charging units.
- Total charging amperage of max. 2100 mA for quick reload.
- With replaceable 10 A fuse.
- Three-core arrangement protects phase, neutral and earth leads.



Insurance cover for up to **5 million Euros** for personal injury and material damage within the framework of our product liability insurance.



Article No.	EAN-Code	UP	Cable	Cable length	Socket	Interference filter	Colour	Nominal current	Plug
1 15605 3 594	639700	2	05VV-F 3G1,25	3 m	4	-	Black/Light Grey	13 A	BS 1363

## High quality overvoltage protectors with practical, well thought-out details.



- 1 Efficient interference filter, reliably suppresses HF interference through the use of special coils and capacitors, prevents video and audio interference.
- 2 Overvoltage protection display, indicates operating status of overvoltage protection.
- 3 High-capacity metal oxide varistors, with low response voltage for swift reactions and reliable discharge of excess energy.
- 4 Protected 230 V mains connections, high quality, 3-pole AC voltage protection by varistors and gas discharge tube, ensuring reliable power supply to your equipment.
- 5 Thermal security system, monitors all varistors for impermissible heating through overload and cuts out in time to prevent danger.
- 6 Earthed sockets with child protection, intelligent 45° arrangement.
- 7 Two-pole mains switch, (230 V/16 A) with integral operating status indicator light.
- 8 High quality mains lead, 3 m long with 3 x 1.5 mm<sup>2</sup> cross section, replaceable.





## Premium-Line 30.000 A Extension Socket With Surge Protection

- Protection for your appliance from malfunctions in the mains, such as surges, indirect lightning strikes or circuit noises, with a maximum sum of leakage current of up to 30.000 A.
- Suppresses visual and acoustic interference in TV sets, video recorders and audio systems.
- Protects sensitive electronics from high frequency interference voltages.
- Light indicating surge voltage is active.
- Illuminated 2-pole safety switch.
- With replaceable 10 A fuse.
- Three-core arrangement protects phase, neutral and earth leads.



Insurance cover for up to **5 million Euros** for personal injury and material damage within the framework of our product liability insurance.



Article No.	EAN-Code 4007123...	UP	Cable	Cable length	Socket	Interference filter	Colour	Nominal current	Plug
<b>1 15605 3 374</b>	110582	2	05VV-F 3G1,25	1.8 m	4	-	Black/Light Grey	13 A	BS 1363
<b>1 15605 3 394</b>	110605	2	05VV-F 3G1,25	3 m	4	EMI/RFI	Black/Light Grey	13 A	BS 1363
<b>1 25605 3 378</b>	110568	2	05VV-F 3G1,25	3 m	8 DUO	-	Black/Light Grey	13 A	BS 1363

Power Distribution  
BS / CEE

Extension Sockets  
Lightning & Surge Protection

Power Distribution  
Multi-Line

Extension Sockets  
Multi-Line

Lighting & Solar Technology

Home Security & Safety

Home, Workshop & DIY

Advertising Media



## hugo! 19.500 A Extension Socket With Surge Protection



Colourful, stylish, cool. With surge protection.

- Protects expensive devices from overloads with a max. surge current of up to 19.500 A.
- Optical function display for overload protection.
- Shapely and stable enclosure due to polished, highly break-proof polycarbonate.
- Illuminated 2-pole ON/OFF safety switch.
- With widely spaced sockets positioned at a 90° angle.
- Childproof sockets.
- With mounting facilities for wall installation.
- In blister packaging.



Insurance cover for up to **5 million Euros** for personal injury and material damage within the framework of our product liability insurance.



Article No.	EAN-Code	UP	Cable length	Cable	Length approx.	Socket	Colour	Nominal current	Plug
<b>8-way, 3 m cable</b>									
1 15061 3 378	620616	1	3 m	05VV-F 3G1,25	57 cm	8	Rubin-red	13 A	BS 1363
									
1 15061 3 328	620647	1	3 m	05VV-F 3G1,25	57 cm	8	White	13 A	BS 1363
									
1 15061 3 318	620678	1	3 m	05VV-F 3G1,25	57 cm	8	Anthracite	13 A	BS 1363
									



## Eco-Line 13.500 A Extension Socket With Surge Protection

- The competitively priced quality socket outlet rail for DIY, home and office.
- Prevents damage or destruction from voltage peaks, and provides effective protection against indirect lightning strikes.
- Suitable for wall fixing. With 2 m cable with BS-plug 13 A.
- Equipped with an illuminated on/off switch and surge neon indicator.
- In blister packaging.
- Light indicating surge voltage is active.



Insurance cover for up to **5 million Euros** for personal injury and material damage within the framework of our product liability insurance.



Article No.	EAN-Code	UP	Cable length	Cable	Length approx.	Socket	Colour	Nominal current	Plug
1 15675 3	118106	4	2 m	05VV-F 3G1,25	41 cm	5	Anthracite	13 A	BS 1363



## Desktop-Power 13.500 A Surge Protected Socket With USB-Hub 2.0 Splitter with switch and surge protection

Indispensable extension socket on your desk, ideal to connect your laptop, including 4 USB-ports, as splitter (no chargers!)

- Protects expensive devices from overloads with a max. surge current of up to 13.500A.
- Polished surface.
- 4 USB-ports as splitter for e.g. memory stick, Bluetooth etc.
- Childproof sockets in a practical 45° arrangement.
- 1.8 m of connecting cable 13 A/240 V.
- 1.0 m connecting cable with USB-plug.
- With illuminated on/off safety switch.
- In blister packaging.



Insurance cover for up to **5 million Euros** for personal injury and material damage within the framework of our product liability insurance.



Article No.	EAN-Code	UP	Cable length	Cable	Length approx.	Socket	USB-ports	Nominal current	Plug
1 15354 3 134	213931	1	1,8 m	05VV-F 3G1,25	24 cm	4	4	13 A	BS 1363

Power Distribution  
BS / CEEExtension Sockets  
Lightning & Surge ProtectionPower Distribution  
Multi-LineExtension Sockets  
Multi-Line

## Primera-Line 13.500 A Surge Protected Adapter

- Efficient surge protection made from gas discharge tube and metal oxide varistors with thermal fuse.
- Protects electrical appliances against surges with a max. up to 13.500 A.
- Protects phase, neutral- and the protective earth.
- Indicator for the protective function.
- Childproof socket.
- Max. load 3120 W/13 A.
- In blister packaging.



Insurance cover for up to **5 million Euros** for personal injury and material damage within the framework of our product liability insurance.



Article No.	EAN-Code	UP	Nominal current	Colour	Plug
1 50695 3	191499	6	13 A	Silver/Black	BS 1363

Lighting &amp; Solar Technology

Home Security &amp; Safety

Home, Workshop &amp; DIY

Advertising Media



## USB everywhere! Nothing doing without power!

**Sockets are becoming available again at last, thanks to integrated USB chargers.**

Smartphones, tablets, cameras, power banks and the like are always hungry for power. Most households use a large number of power packs and cables to satisfy that appetite. Frequently, these use up all available sockets, making a free slot a scarce commodity.

Our new **multiple outlet strips with a powerful integrated USB charger** offer the perfect solution.

You can put them on or under your desk or workspace, with or without overvoltage protection - the choice is yours. Our range even includes a version that can be concealed in the desk top.

**What connects them all is the high USB charging current output of 5 V/max. 2,100 mA for fast charging and the 2 USB ports.**



### Premium-Alu-Line FB Extension Socket With Safety Fuse Button And USB-Charger and „easy reset function“ in case of overload

Extra H/D cable 3G1.5 mm<sup>2</sup> for high product safety.

- Advanced „fuse button reset function“ eliminates time consuming plug fuse replacement. Simply resettable in case of overload.
- Attractive, timeless, sturdy housing made from aluminium with hardwearing, matt-finished surfaces.
- Hole suitable for hanging.
- Wall-mounting holes.
- Innovative and individual fixture system.
- Earthed sockets in a 45° arrangement.
- Excess cable can be wound around the housing.
- Extra robustness.
- Childproof sockets.
- Illuminated 2-pole ON/OFF safety switch.
- Packaging: Shrink-wrapped - for protection against dust and contamination.



Article No.	EAN-Code	UP	Cable length	Cable	Socket	Nominal current	Plug
1 39100 3 515	648573	4	3 m	H05VV-F 3G1,5	5	13 A	BS 1363



Power Distribution  
BS / CEE

Extension Sockets  
BS

Power Distribution  
Multi-Line

Extension Sockets  
Multi-Line

Lighting & Solar Technology

Home Security & Safety

Home, Workshop & DIY

Advertising Media

Power Distribution  
BS / CEI

Extension Sockets  
BS

Power Distribution  
Multi-Line

Extension Sockets  
Multi-Line

Lighting & Solar Technology

Home Security & Safety

Home, Workshop & DIY

Advertising Media



## Premium-Line FB Extension Socket With Safety Fuse Button And USB-Charger and „easy reset function“ in case of overload

Extra H/D cable 3G1.5 mm<sup>2</sup> for high product safety.

- Advanced „fuse button reset function“ eliminates time consuming plug fuse replacement. Simply resettable in case of overload.
- Robust extension sockets, designed to be the best and made of break-resistant special plastic material.
- Elegant, sleek, timeless, high-quality design.
- Earthed sockets in a 45° arrangement, ideal for angular plugs.
- 2 USB-charging units 2100 mA.
- Illuminated 2-pole ON/OFF safety switch.
- With option to wind the cable around the rail for storage.
- With practical hanging facility.
- Innovative and individual fixture system.
- Childproof sockets.
- Packaging: Shrink-wrapped - for protection against dust and contamination.



Article No.	EAN-Code	UP	Cable length	Cable	Length approx.	Socket	Colour	Plug
1 95115 3 600	648542	4	3 m	H05VV-F 3G1,5	60 cm	5	Black	BS 1363





### Premium-Office-Line FB Extension Socket With Safety Fuse Button And USB-Charger and „easy reset function“ in case of overload

Extra H/D cable 3G1.5 mm<sup>2</sup> for high product safety.

- Advanced „fuse button reset function“ eliminates time consuming plug fuse replacement. Simply resettable in case of overload.
- Elegant, ageless desktop design made from extremely durable special synthetic material.
- Comfortable to directly plug-in and switch-on the desk.
- Earthed sockets in a 45° arrangement.
- 2 USB-charging units 2100 mA.
- Illuminated 2-pole ON/OFF safety switch.
- Childproof sockets.
- Packaging: Shrink-wrapped - for protection against dust and contamination.



Article No.	EAN-Code	UP	Cable length	Cable	Socket	Colour	Plug
1 15625 3 515	648566	4	3 m	H05VV-F 3G1,5	5	Black	BS 1363



Power Distribution  
BS / CEE

Extension Sockets  
BS

Power Distribution  
Multi-Line

Extension Sockets  
Multi-Line

Lighting & Solar Technology

Home Security & Safety

Home, Workshop & DIY

Advertising Media



## Premium-Alu-Line FB Extension Socket With Safety Fuse Button

and „easy reset function“ in case of overload

Extra H/D cable 3G1.5 mm<sup>2</sup> for high product safety.

- Advanced „fuse button reset function“ eliminates time consuming plug fuse replacement. Simply resettable in case of overload.
- Attractive, timeless, sturdy housing made from aluminium with hardwearing, matt-finished surfaces.
- Hole suitable for hanging.
- Wall-mounting holes.
- Innovative and individual fixture system.
- Earthed sockets in a 45° arrangement.
- Excess cable can be wound around the housing.
- Extra robustness.
- Childproof sockets.
- Illuminated 2-pole ON/OFF safety switch.
- Packaging: Shrink-wrapped - for protection against dust and contamination.



Article No.	EAN-Code 4007123...	UP	Cable length	Cable	Length approx.	Socket	Nominal current	Plug
1 39100 3 644	643066	4	3 m	H05VV-F 3G1,5	41 cm	4	13 A	BS 1363
1 39100 3 654	643097	4	5 m	H05VV-F 3G1,5	41 cm	4	13 A	BS 1363
1 39100 3 646	643127	4	3 m	H05VV-F 3G1,5	54 cm	6	13 A	BS 1363

Power Distribution  
BS / CEE

Extension Sockets  
BS

Power Distribution  
Multi-Line

Extension Sockets  
Multi-Line

Lighting & Solar Technology

Home Security & Safety

Home, Workshop & DIY

Advertising Media





## Premium-Line FB Extension Socket With Safety Fuse Button

and „easy reset function“ in case of overload  
Extra H/D cable 3G1.5 mm<sup>2</sup> for high product safety.

- Advanced „fuse button reset function“ eliminates time consuming plug fuse replacement. Simply resettable in case of overload.
- Robust extension sockets, designed to be the best and made of break-resistant special plastic material.
- Elegant, sleek, timeless, high-quality design.
- Earthed sockets in a 45° arrangement, ideal for angular plugs.
- Illuminated 2-pole ON/OFF safety switch.
- With option to wind the cable around the rail for storage.
- With practical hanging facility.
- Innovative and individual fixture system.
- Childproof sockets.
- Packaging: Shrink-wrapped - for protection against dust and contamination.



Article No.	EAN-Code 4007123...	UP	Cable length	Cable	Length approx.	Socket	Colour	Nominal current	Plug
<b>4-way, 3 m cable</b>									
1 95114 3 603	643059	4	3 m	H05VV-F 3G1,5	40 cm	4	Black	13 A	BS 1363
1 95154 3 603	643073	4	3 m	H05VV-F 3G1,5	40 cm	4	Black/Light Grey	13 A	BS 1363
<b>4-way, 5 m cable</b>									
1 95114 3 604	643080	4	5 m	H05VV-F 3G1,5	40 cm	4	Black	13 A	BS 1363
<b>6-way, 3 m cable</b>									
1 95116 3 602	643103	4	3 m	H05VV-F 3G1,5	53 cm	6	Black	13 A	BS 1363
1 95156 3 601	643110	4	3 m	H05VV-F 3G1,5	53 cm	6	Black/Light Grey	13 A	BS 1363
<b>6-way, 5 m cable</b>									
1 95116 3 603	643134	4	5 m	H05VV-F 3G1,5	53 cm	6	Black	13 A	BS 1363
<b>8-way, 3 m cable</b>									
1 95118 3 601	643141	4	3 m	H05VV-F 3G1,5	65 cm	8	Black	13 A	BS 1363

Patent pending.

Power Distribution  
BS / CEE

Extension Sockets  
BS

Power Distribution  
Multi-Line

Extension Sockets  
Multi-Line

Lighting & Solar Technology

Home Security & Safety

Home, Workshop & DIY

Advertising Media

Power Distribution  
BS / CEE



Extension Sockets  
BS



Power Distribution  
Multi-Line

## Super-Solid-Line FB Extension Socket With Safety Fuse Button and „easy reset function“ in case of overload

Extra H/D cable 3G1.5 mm<sup>2</sup> for high product safety.

- Extremely sturdily constructed extension socket made from highly break-resistant polycarbonate.
- With illuminated 2-pole ON/OFF switch.
- Earthed sockets in a 90° arrangement, for angled plugs as well.
- The distance between the sockets allows the use of large charger units.
- With practical hanging facility.
- With childproof sockets.
- Special feature: cable output is fitted opposite the switch. Therefore, no surplus cable e.g. on the desk.
- Rubber pads prevent extension socket from slipping.


Extension Sockets  
Multi-Line



Lighting & Solar Technology

Article No.	EAN-Code	UP	Cable length	Cable	Length approx.	Socket	Colour	Nominal current	Plug
1 15334 3 625	942977	1	2,5 m	H05VV-F 3G1,5	44,5 cm	5	Black/Light Grey	13 A	BS 1363
1 15334 3 628	642984	1	2,5 m	H05VV-F 3G1,5	63 cm	8	Black/Light Grey	13 A	BS 1363

Home Security & Safety

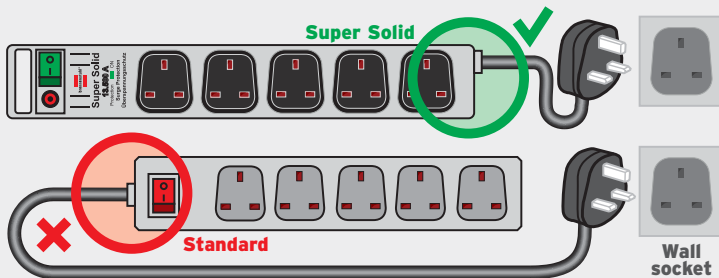

Home, Workshop & DIY




Advertising Media



**ECOLOR FB Extension Socket**  
**With Safety Fuse Button**  
 and „easy reset function“ in case of overload  
 Extra H/D cable 3G1.5 mm<sup>2</sup> for high product safety.

- Elegant, sleek, timeless, high-quality design.
- Polished surface.
- Illuminated 2-pole ON/OFF safety switch.
- Childproof sockets.



Article No.	EAN-Code	UP	Cable length	Cable	Length approx.	Socket	Colour	Nominal current	Plug
1 15325 3 000	651399	8	1,5 m	H05VV-F 3G1,5	29 cm	5	Black/Black	13 A	BS 1363
									
1 15325 3 020	644261	8	1,5 m	H05VV-F 3G1,5	29 cm	5	White/Black	13 A	BS 1363
									
1 15325 3 070	651429	8	1,5 m	H05VV-F 3G1,5	29 cm	5	Red/Black	13 A	BS 1363
									

Probably available as from November 2017 on.



Power Distribution  
BS / CEE

Extension Sockets  
BS

Power Distribution  
Multi-Line

Extension Sockets  
Multi-Line

Lighting & Solar Technology

Home Security & Safety

Home, Workshop & DIY

Advertising Media








## Premium-Alu-Line Extension Socket

For connection of data processing/Video/HiFi equipment and other appliances, e.g. PC, printer, modem, etc. for industrial, trade and private use.

- Attractive, timeless, sturdy housing made from aluminium with hardwearing, matt-finished surfaces.
- Hole suitable for hanging.
- Wall-mounting holes.
- Earthed sockets in a 45° arrangement.
- Excess cable can be wound around the housing.
- Extra robustness.
- Childproof socket.
- Illuminated 2-pole ON/OFF safety switch.
- Packaging: Shrink-wrapped - for protection against dust and contamination.



Article No.	EAN-Code 4007123...	UP	Cable length	Cable	Length approx.	Socket	Nominal current	Plug
<b>1 39100 3 014</b>	142071	4	1.8 m	05VV-F 3G1,25	41 cm	4	13 A	BS 1363
								
<b>1 39100 3 016</b>	142095	4	3 m	05VV-F 3G1,25	54 cm	6	13 A	BS 1363
								
<b>1 39100 3 018</b>	166596	4	3 m	05VV-F 3G1,25	66 cm	8	13 A	BS 1363
								



# Premium-Line

## The Star Among Extension Sockets!

**MADE  
IN GERMANY**

Power Distribution  
BS / CEE

Extension Sockets  
BS

Power Distribution  
Multi-Line


Extension Sockets  
Multi-Line

Lighting & Solar Technology

Home Security & Safety

Home, Workshop & DIY

Advertising Media

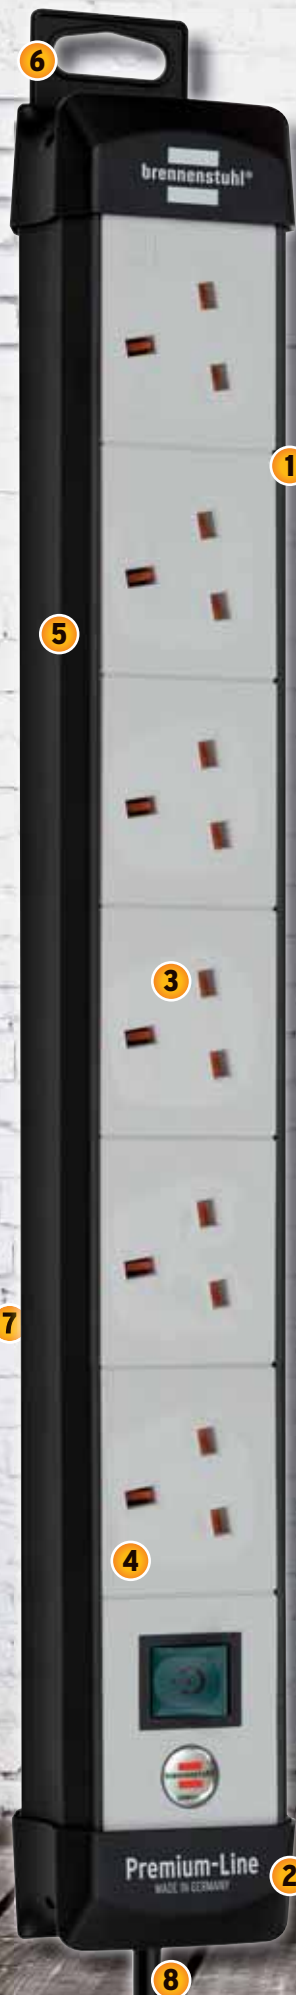

### 1 Premium Quality

An exceptionally stable and well-designed compact extension socket made of virtually unbreakable plastic. Meets the highest standards for products „Made in Germany“.

### 5 Handy and Compact

Cable compartment for safe and tidy storage.

1

### 2 Exclusive Design

Elegant, slim, timeless, high-quality design.

### 6 Innovative Mounting System

Removable mounting plate for quick and easy attachment.

### 3 Sockets

Earthed sockets with child proof in a 45° arrangement, also suitable for right-angle plugs.

### 7 Individual Mounting Options

Additional and handy straps for mounting with Velcro® tape, cable ties, etc. are located on both ends on the back.



### 4 Safe to Switch On/Off

Illuminated safety switch, 2-pole on/off.

### 8 High Quality Cable

Top-quality, safe cable.

## Innovative Mounting System



### For Quick And Easy Attachment

The clever detachable mounting plate attaches quickly and easily on the back of the Premium-Line. Simply detach the strap by pressing lightly on the detent. By turning the plate 180° and snapping it back into the extension socket the mounting holes can be positioned correctly for mounting.




















## Premium-Line Extension Socket

- Robust extension sockets, designed to be the best and made of break-resistant special plastic material.
- Elegant, sleek, timeless, high-quality design.
- Earthed sockets in a 45° arrangement, ideal for angular plugs.
- Illuminated 2-pole ON/OFF safety switch.
- With option to wind the cable around the rail for storage.
- With practical hanging facility.
- Innovative and individual fixture system.
- Childproof sockets.
- Packaging: Shrink-wrapped - for protection against dust and contamination.



Article No.	EAN-Code 4007123...	UP	Cable length	Cable	Length approx.	Socket	Colour	Nominal current	Plug
<b>3-way, 3 m cable</b>									
1 95113 3 100	647934	4	3 m	H05VV-F 3G1,5	39,5 cm	3	Black		BS 1363
1 95513 3 100	647941	4	3 m	H05VV-F 3G1,5	39,5 cm	3	Grey/Black		BS 1363
<b>3-way, 5 m cable</b>									
1 95113 3 101	647958	4	5 m	H05VV-F 3G1,5	39,5 cm	3	Black		BS 1363
<b>4-way, 1.8 m cable</b>									
1 95114 3 100	627004	4	1,8 m	05VV-F 3G1,25	40 cm	4	Black	13 A	BS 1363
1 95154 3 100	627141	4	1,8 m	05VV-F 3G1,25	40 cm	4	Black/Grey	13 A	BS 1363
1 95554 3 100	627486	4	1,8 m	05VV-F 3G1,25	40 cm	4	Grey	13 A	BS 1363
1 95224 3 100	627349	4	1,8 m	05VV-F 3G1,25	40 cm	4	White	13 A	BS 1363



Article No.	EAN-Code 4007123...	UP	Cable length	Cable	Length approx.	Socket	Colour	Nominal current	Plug
<b>4-way, 3 m cable</b>									
1 95154 3 101	627288	4	3 m	 05VV-F 3G1,25	40 cm	4	Black/Grey	13 A	BS 1363
									
<b>4-way, 5 m cable</b>									
1 95154 3 102	628155	4	5 m	 05VV-F 3G1,25	40 cm	4	Black/Grey	13 A	BS 1363
									
1 95224 3 102	631551	4	5 m	05VV-F 3G1,25	40 cm	4	White	13 A	BS 1363
									
<b>6-way, 3 m cable</b>									
1 95116 3 100	627264	4	3 m	 05VV-F 3G1,25	53 cm	6	Black	13 A	BS 1363
									
1 95156 3 100	627301	4	3 m	05VV-F 3G1,25	53 cm	6	Black/Light Grey	13 A	BS 1363
									
1 95556 3 100	627509	4	3 m	05VV-F 3G1,25	53 cm	6	Light Grey	13 A	BS 1363
									
1 95226 3 100	627363	4	3 m	05VV-F 3G1,25	53 cm	6	White	13 A	BS 1363
									
<b>6-way, 5 m cable</b>									
1 95156 3 101	627585	4	5 m	 05VV-F 3G1,25	53 cm	6	Black/Light Grey	13 A	BS 1363
									
<b>8-way, 3 m cable</b>									
1 95118 3 100	627028	4	3 m	 05VV-F 3G1,25	65 cm	8	Black	13 A	BS 1363
									
1 95158 3 100	627325	4	3 m	05VV-F 3G1,25	65 cm	8	Black/Light Grey	13 A	BS 1363
									
1 95558 3 100	627523	4	3 m	05VV-F 3G1,25	65 cm	8	Light Grey	13 A	BS 1363
									
1 95228 3 100	627387	4	3 m	05VV-F 3G1,25	65 cm	8	White	13 A	BS 1363
									

Patent pending.

Power Distribution  
BS / CEE

Extension Sockets  
BS

Power Distribution  
Multi-Line

Extension Sockets  
Multi-Line

Lighting & Solar Technology

Home Security & Safety

Home, Workshop & DIY

Advertising Media



## Premium-Line Technics Extension Socket

- Robust extension sockets, designed to be the best and made of break-resistant special plastic material.
- Elegant, sleek, timeless, high-quality design.
- Earthed sockets in a 45° arrangement, ideal for angular plugs.
- Illuminated 2-pole ON/OFF safety switch.
- With option to wind the cable around the rail for storage.
- With practical hanging facility.
- Innovative and individual fixture system.
- Childproof sockets.
- Packaging: Shrink-wrapped - for protection against dust and contamination.



Article No.	EAN-Code	UP	Cable length	Cable	Length approx.	Socket	Colour	Nominal current	Plug
<b>5-way Extension Socket „3 + 2 x 1“</b>									
1 95155 3 600	627165	4	3 m	05VV-F 3G1,25	53 cm	5 (1 x 3 + 2 x 1) sockets switched	Black/Light Grey	13 A	BS 1363

<b>12-way Extension Socket „8 + 4“</b>									
1 95152 3 600	627127	2	3 m	05VV-F 3G1,25	100 cm	12 (1 x 8 + 1 x 4) sockets switched	Black/Light Grey	13 A	BS 1363

Patent pending.







### Premium-Line Technics Extension Socket British Standard/German Standard

- Quality extension sockets in top design and modern colour combinations.
- Housing made of break-resistant plastic.
- With 2 holes on either side suitable for wall-mounting.
- Childproof socket.
- Excess cable can be wound around the housing.
- With illuminated 2-pole switch with protection cover.
- Some types with extra widely spaced sockets to accommodate large charging units, etc.



Article No.	EAN-Code	UP	Cable length	Cable	Length approx.	Socket	Colour	Nominal current	
1 15605 3 024	610761	4	3 m	05VV-F 3G1,25	55 cm	4 x BS + 2 x earthed	Black/Light Grey	13 A	
1 25605 3 044	610778	2	3 m	05VV-F 3G1,25	50 cm	4 x BS + 4 x earthed	Black/Light Grey	13 A	

Power Distribution  
BS / CEE

Extension Sockets  
BS

Power Distribution  
Multi-Line

Extension Sockets  
Multi-Line

Lighting & Solar Technology

Home Security & Safety

Home, Workshop & DIY

Advertising Media

Power Distribution  
BS / CEI



Extension Sockets  
BS

## Alu-Office-Line Extension Socket

For convenient connection of data processing/Video and audio sets directly with different appliances on the desk.



- Elegant, ageless desktop design made from aluminium with unsusceptible, matt-finished surface.
- Conceived cable routing and easy operation.
- Comfortable to directly plug-in and switch-on the desk.
- Earthed sockets in a 45° arrangement, ideal for angular plugs.
- Illuminated 2-pole ON/OFF safety switch.
- Childproof sockets.
- Packaging: Shrink-wrapped - for protection against dust and contamination.



Power Distribution  
Multi-Line

Extension Sockets  
Multi-Line

Article No.	EAN-Code	UP	Cable length	Cable	Length approx.	Socket	Nominal current	Plug
1 39400 3 416	561698	1	3 m	05VV-F 3G1,25	38 cm	6	13 A	BS 1363



Lighting & Solar Technology



Home Security & Safety

## Premium-Office-Line Extension Socket

For convenient connection of data processing/Video and audio sets directly with different appliances on the desk.



- Elegant, ageless desktop design made from extremely durable special synthetic material.
- Comfortable to directly plug-in and switch-on the desk.
- Earthed sockets in a 45° arrangement.
- Illuminated 2-pole ON/OFF safety switch.
- Childproof sockets.
- Packaging: Shrink-wrapped - for protection against dust and contamination.



Home, Workshop & DIY

Advertising Media

Article No.	EAN-Code	UP	Cable length	Cable	Length approx.	Socket	Colour	Nominal current	Plug
1 15625 3 416	561681	1	3 m	05VV-F 3G1,25	38 cm	6	Black/Light Grey	13 A	BS 1363





### Primera-Line Extension Socket

The design multiple sockets with clever features.

- With cable clip for the storage of surplus cable.
- Option of variable cable output on both sides.
- Sockets arranged at 90° angles.
- Convenient spacing of the sockets.
- With mounting facilities for wall installation.
- Packaging: Shrink-wrapped - for protection against dust and contamination.



Article No.	EAN-Code	UP	Cable length	Cable	Length approx.	Socket	Colour	Nominal current	Plug
-------------	----------	----	--------------	-------	----------------	--------	--------	-----------------	------

**4-way, 1,5 m cable**

1 15330 3 124	214372	4	1,5 m	05VV-F 3G1,25	38 cm	4	Black	13 A	BS 1363
---------------	--------	---	-------	---------------	-------	---	-------	------	---------



1 15339 3 124	214433	4	1,5 m	05VV-F 3G1,25	38 cm	4	Silver	13 A	BS 1363
---------------	--------	---	-------	---------------	-------	---	--------	------	---------



**8-way, 2 m cable**

1 15330 3 128	214396	4	2 m	05VV-F 3G1,25	59,5 cm	8	Black	13 A	BS 1363
---------------	--------	---	-----	---------------	---------	---	-------	------	---------



1 15339 3 128	214457	4	2 m	05VV-F 3G1,25	59,5 cm	8	Silver	13 A	BS 1363
---------------	--------	---	-----	---------------	---------	---	--------	------	---------



**10-way, 2 m cable**

1 15330 3 120	214358	4	2 m	05VV-F 3G1,25	47 cm	10	Black	13 A	BS 1363
---------------	--------	---	-----	---------------	-------	----	-------	------	---------



1 15339 3 120	214419	4	2 m	05VV-F 3G1,25	47 cm	10	Silver	13 A	BS 1363
---------------	--------	---	-----	---------------	-------	----	--------	------	---------




**1 Cable Storage**



**2 Variable Cable output**



**3 Variable Cable output**

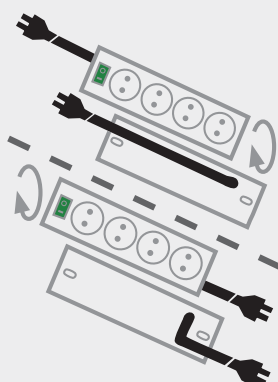

Patent pending.

Power Distribution  
BS / CEE

Extension Sockets  
BS

Power Distribution  
Multi-Line

Extension Sockets  
Multi-Line

Lighting & Solar Technology

Home Security & Safety

Home, Workshop & DIY

Advertising Media




## Super-Solid-Line Extension Socket

- Extremely sturdily constructed extension socket made from highly break-resistant polycarbonate.
- With illuminated 2-pole ON/OFF switch.
- Earthed sockets in a 90° arrangement, for angled plugs as well.
- The distance between the sockets allows the use of large charger units.
- With practical hanging facility.
- With childproof sockets.
- Special feature: cable output is fitted opposite the switch. Therefore, no surplus cable e.g. on the desk.
- Rubber pads prevent extension socket from slipping.



Article No.	EAN-Code	UP	Cable length	Cable	Length approx.	Socket	Colour	Nominal current	Plug
1 15334 3 215	596102	1	2.5 m	05VV-F 3G1,25	44,5 cm	5	Black/Light Grey	13 A	BS 1363
1 15334 3 218	596119	1	2.5 m	05VV-F 3G1,25	63 cm	8	Black/Light Grey	13 A	BS 1363

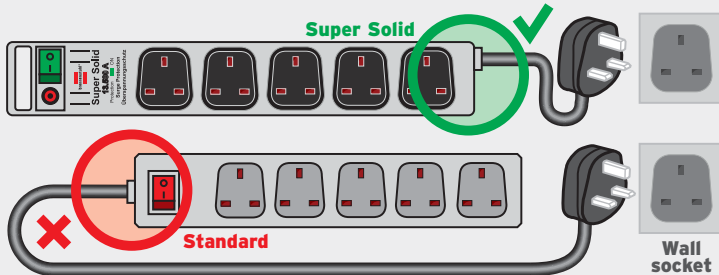






## ECOLOR Extension Socket

- Elegant, sleek, timeless, high-quality design.
- Polished surface.
- Illuminated 2-pole ON/OFF safety switch.
- Childproof sockets.



Article No.	EAN-Code 4007123...	UP	Cable length	Cable	Length approx.	Socket	Colour	Nominal current	Plug
1 15323 3 000	651405	8	1,5 m	H05VV-F 3G1,5	20 cm	3	Black/Black	13 A	BS 1363
									
1 15323 3 020	644230	8	1,5 m	H05VV-F 3G1,5	20 cm	3	White/Black	13 A	BS 1363
									
1 15323 3 070	651412	8	1,5 m	H05VV-F 3G1,5	20 cm	3	Red/Black	13 A	BS 1363
									

Probably available as from November 2017 on.



Power Distribution  
BS / CEE

Extension Sockets  
BS

Power Distribution  
Multi-Line

Extension Sockets  
Multi-Line

Lighting & Solar Technology

Home Security & Safety

Home, Workshop & DIY

Advertising Media

Power Distribution  
BS / CEE

Extension Sockets  
BS

Power Distribution  
Multi-Line

Extension Sockets  
Multi-Line

Lighting & Solar Technology

Home Security & Safety

Home, Workshop & DIY

Advertising Media



### Tower Power Pop-Up Extension Socket With USB-Charger

Retractable desk outlet for permanent installation. Installs flush with the desktop. Suitable for office, kitchen, workshop, etc.

- Innovative desk outlet for flexible workspace design.
- Retracts completely into the desktop.
- Stylish and robust aluminium housing.
- 2 USB-charging units 2100 mA.
- Slim design.
- Quick and easy to install, 60 mm bore diameter.
- Power indicator.
- Earthed sockets in a 45° arrangement.
- Childproof sockets.
- In blister packaging.



Article No.	EAN-Code	UP	Cable length	Cable	Socket	Colour	Plug
1 39620 3 013	645381	1	2 m	H05VV-F 3G1,5	3	Alu/Black	BS 1363



### Tower Power Pop-Up Extension Socket

Retractable desk outlet for permanent installation. Installs flush with the desktop. Suitable for office, kitchen, workshop, etc.

- Innovative desk outlet for flexible workspace design.
- Retracts completely into the desktop.
- Stylish and robust aluminium housing.
- Slim design.
- Quick and easy to install, 60 mm bore diameter.
- Power indicator.
- Earthed sockets in a 45° arrangement.
- Childproof sockets.
- In blister packaging.



Article No.	EAN-Code	UP	Cable length	Cable	Socket	Colour	Plug
1 39620 3 003	637461	1	2 m	H05VV-F 3G1,5	3	Alu/Black	BS 1363



### Eco-Line Comfort Switch Extension Socket

Multi-way extension socket with comfortable, external hand/foot switch.

- For easy and comfortable on/off switching of all electrical appliances connected by the external foot-operated switch, while the socket outlet remains invisible under the desk or behind the cupboard.
- Robust foot switch with control light.
- Safe and energy efficient through 2-pole disconnection.
- 1.5 m flexible control cable to the external foot switch.
- 2 m loadable mains cable.
- Max. load of 13 A/3120 W.
- Childproof sockets in a practical 90° arrangement.
- In colourful display-packaging.



Article No.	EAN-Code	UP	Cable length	Cable	Length approx.	Socket	Colour	Nominal current	Plug
1 15945 3 616	621446	2	2 m	05VV-F 3G1,25	39 cm	6	Anthracite	13 A	BS 1363



Power Distribution  
BS / CEE

Extension Sockets  
BS

Power Distribution  
Multi-Line

Extension Sockets  
Multi-Line

Lighting & Solar Technology

Home Security & Safety





Home, Workshop & DIY

Advertising Media

## Eco-Line Extension Socket

- The competitively priced quality socket outlet rail for DIY, home and office.
- With illuminated 2-pole switch with protection cover.
- 2 holes suitable for wall-mounting.
- Made of highly impact-resistant special plastic in attractive design.
- With illuminated on/off safety switch.






Article No.	EAN-Code 4007123...	UP	Cable length	Cable	Length approx.	Socket	Colour	Nominal current	Plug
<b>4-way, 1.5 m cable · With tab for hanging</b>									
1 15040 3	059683	8	1.5 m	05VV-F 3G1,25	33 cm	4	Black	13 A	BS 1363
									
1 15042 3	212200	8	1.5 m	05VV-F 3G1,25	33 cm	4	White	13 A	BS 1363
									
<b>6-way, 1.5 m cable · With tab for hanging</b>									
1 15950 3	059706	8	1.5 m	05VV-F 3G1,25	43 cm	6	Black	13 A	BS 1363
									
1 15952 3	212217	8	1.5 m	05VV-F 3G1,25	43 cm	6	White	13 A	BS 1363
									

Design protected.

## 4-Way Extension Socket With Neon Indicator



Article No.	EAN-Code 4007123...	UP	Cable length	Cable	Length approx.	Socket	Colour	Nominal current	Plug
1 15062 3 444	173396	20	2 m	05VV-F 3G1,25	27 cm	4	White	13 A	BS 1363
									
1 15062 3 454	173402	20	5 m	05VV-F 3G1,25	27 cm	4	White	13 A	BS 1363
 									





**Remote Control Sets**

**58**

Power Distribution  
BS / CEE



**Weekly Timer**

**59**

Plug-in Appliances  
BS



**Wattage & Current Meter**

**60**

Power Distribution  
Multi-Line



**Adapter**

**61**

Extension Sockets  
Multi-Line



**LED Nightlight**

**61**

Lighting & Solar Technology



**Travel Adapter**

**63**


Home Security & Safety



**Cable Organisation**

**67**

Home, Workshop & DIY



Advertising Media

Power Distribution  
BS / CEE

Plug-In Appliances  
BS

Power Distribution  
Multi-Line

Extension Sockets  
Multi-Line

Lighting & Solar Technology

Home Security & Safety

Home, Workshop & DIY


Advertising Media



## Primera-Line Remote Control Set 1 + 3 RC 3600

Control up to 3 devices comfortably and securely via remote control.

- Control appliances connected from your arm-chair and save power!
- Easy to use 4 channel hand transmitter to switch all channels.
- Remote control and receiver socket, any combination.
- Sockets can be operated manually.
- Self learning coding, automatic storage.
- Switching capacity max. 3120 W, 50/60 Hz.
- Range up to 25 Meters (Frequency 433.92 MHz).
- 12 V battery (type A23) for remote control included.
- Childproof socket.
- In blister packaging.

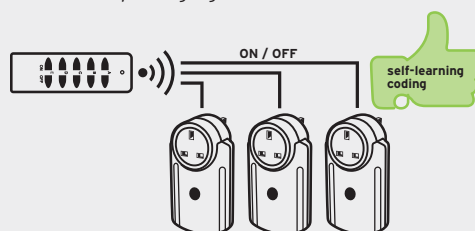


Article No.	EAN-Code	UP	Battery type	Scope of delivery	Description	Plug
1 50747 3	192076	6	1 x A23	1 x 4 channel hand held transmitter, 3 x radio controlled receiver RCR 3600, max. 3120 W	Primera-Line Remote Control Set RC 3600, 220 - 250 V~, 50/60 Hz	BS 1363

## Remote Control Set 1 + 3 RCS 1000 Comfort

The comfortable way for switching electrical equipment on/off by a remote control button.

- Control appliances connected from your arm-chair and save power!
- Plug receiver socket into the main socket and the appliance you wish to use into the receiver socket.
- Particularly suitable for operating lamps and other electrical items, which are inaccessible.
- Extremely useful for people with mobility difficulties.
- Switching capacity max. 1.000 W, 50/60 Hz.
- Childproof socket.
- Works up to a distance of 25 metres.
- Frequency 433,92 MHz.
- In blister packaging.

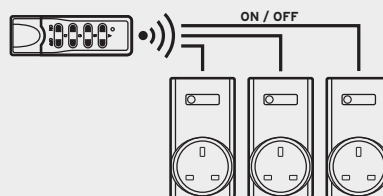


Article No.	EAN-Code	UP	Battery type	Scope of delivery	Description	Plug
1 50745 3	213375	6	1 x A23	1 x 4 channel sender, 3 x remote receivers sockets, max 1000 W	RCS 1000 Comfort 220 - 250 V~, 50/60 Hz	BS 1363



## Comfort-Line Remote Control Set RC CE1 3001 with Selflearning Coding

For comfortably switching electrical devices and lamps up to 1000 W ON and OFF; for use indoors.

- 3 outlet adapter with wireless receiver for indoors IP 20.
- Switch position indicator on the receiver; can also be operated manually.
- Simple and flexible use by means of self-teaching coding.
- Fail-safe due to more than 65,000 different codes.
- Continuous storage of the coding even in the event of a longer power failure.
- 4-channel manual transmitter for simultaneous universal operation of individual or multiple receivers.
- Switching capacity 1.000 W.
- Range up to 25 Meters (Frequency 433.92 MHz).
- 3 V battery (type CR2032) for remote control included.
- Childproof sockets.
- In blister packaging.

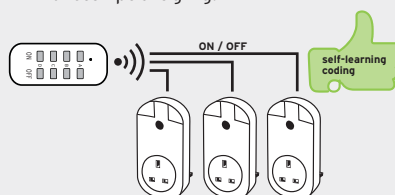

**NEW**



Article No.	EAN-Code	UP	Battery type	Scope of delivery	Plug
1 50704 3	651658	1	1 x CR2032	1 x 4 channel sender, 3 x remote receivers sockets IP 20	BS 1363

Probably available as from December 2017 on.



## Primera-Line Digital Weekly Timer DT

- Extra large display for days, hours in 12 and 24 hour-format, minutes and seconds.
- 20 ON/OFF programmes for day, hour and minute setting.
- Easy 4 button operation.
- Shortest switching-time 1 minute.
- Countdown function.
- Random function.
- Summer/Winter time.
- Manual ON/OFF.
- Programme: Interruption during operation is possible.
- Data memory in case of power cut.
- Practical housing when using switch and socket combination the switch will not be covered.
- Inclusive 2 batteries AG13 (LR44).
- Childproof socket.
- In blister packaging.

**ENGINEERED  
IN GERMANY**



Article No.	EAN-Code	UP	Further information	Plug
1 50750 3	192137	6	Max. load 13 A/3120 W, 220 - 250 V~, 50/60 Hz	BS 1363

Power Distribution  
BS / CEE

Plug-in Appliances  
BS

Power Distribution  
Multi-Line

Extension Sockets  
Multi-Line

Lighting & Solar Technology

Home Security & Safety

Home, Workshop & DIY

Advertising Media

Power Distribution  
BS / CEE

Plug-In Appliances  
BS

Power Distribution  
Multi-Line

Extension Sockets  
Multi-Line

Lighting & Solar Technology

Home Security & Safety

Home, Workshop & DIY

Advertising Media



## 24 hour Timer MZ 20-1

The competitively priced timer with 24-hour programme.

- Up to 96 on/off switching times per day can be set.
- Shortest switching time: 15 minutes.
- Easy to set.
- Childproof socket.
- In blister packaging.



Article No.	EAN-Code	UP	Further information	Plug
1 50645 3	150007	6	Max. load 13 A/3120 W, 220 - 250 V~, 50/60 Hz	BS 1363



## Primera-Line Wattage & Current Meter PM 231 E

Helps to save costs and energy.

- Measuring of voltage, frequency, current, efficiency, factor and power output.
- Calculation of the entire energy consumption and energy costs.
- Measuring time in hours and minutes.
- 2 individually adjustable current rates (day + night).
- Inclusive 3 LR44 batteries for data storage in case of a power failure.
- Childproof socket.



Article No.	EAN-Code	UP	Further information	Plug
1 50660 3	598076	1	Max. load 3120 W, 13 A, 220 - 250 V, 50/60 Hz	BS 1363



### 3-Way Adapter for Standard Sockets



- Plug with 3 BS sockets.
- In blister packaging.



Article No.	EAN-Code	UP	Colour	Plug
1 50826 3	645855	5	White	BS 1363

Probably available as from October 2017 on.

Power Distribution  
BS / CEE

Plug-in Appliances  
BS


Power Distribution  
Multi-Line

Extension Sockets  
Multi-Line

### LED Nightlight Color NL 09 RCD with twilight sensor



- LED Nightlight with twilight sensor.
- Three colours: green, blue and white, 3 LEDs each.
- Colours to be chosen by rotary switch.
- Socket with childproof can still be used.
- Exceptionally low electricity consumption, approx. 0.8 W.
- In blister packaging.



Article No.	EAN-Code	UP	Luminous flux	Colour temperature	Measurements	Further information	Plug
1 17326 3	637652	6	10 lm	10000 K	82 x 82 x 76 mm	LEDs switchable: 3 x blue, 3 x green, 3 x white	BS 1363

Lighting & Solar Technology

Home Security & Safety

Home, Workshop & DIY

Advertising Media

Power Distribution  
BS / CEI

Plug-In Appliances  
BS

Power Distribution  
Multi-Line

Extension Sockets  
Multi-Line

Lighting & Solar Technology

Home Security & Safety

Home, Workshop & DIY

Advertising Media



### LED Nightlight OL 02E with twilight sensor

- Nightlight with twilight sensor and 2 LEDs for years of continuous operation.
- Exceptionally low electricity consumption.
- Switches on automatically at dusk.
- Provides safety in dark rooms.
- Soft lighting.
- In blister packaging.



Article No.	EAN-Code	UP	LEDs	Further information	Plug
1 17322 3	610495	4	2	220 - 250 V~, 50/60 Hz	BS 1363




### Battery LED Nightlight NLB 02 BS with PIR sensor and push switch

- Battery LED nightlight with 2 LEDs.
- PIR sensor with 100° horizontal detection angle and max. 3 m range.
- Soft lighting.
- Push switch On/Off.
- Independent from the socket.
- 2 magnets and hooks.
- In blister packaging.



Article No.	EAN-Code	UP	LEDs	Luminous flux	Light duration	Battery type	Colour	Measurements
1 17329 0	637683	6	2 SMD	60 lm	20 h	3 x AA (included)	White	Ø = 84 mm; H = 61 mm




### Travel Adapter GB/Earthed

Adapter enabling electrical equipment using the British plug system to be used in countries using an earthed socket system, e.g. DE, FR, BE, PL, NL, ES, PT, SE, FI, NO, GR, TR, AT ...

- This travel adapter is not a transformer or a frequency converter.
- Childproof socket.
- In blister packaging.

Article No.	EAN-Code	UP	Max. load
1 50853 0	4007123... 170739	5	13 A/250 V



### Travel Adapter Earthed/GB

Adapter enabling electrical equipment using an earthed socket system to be used in countries with the British plug system.

- This travel adapter is not a transformer or a frequency converter.
- Childproof socket.
- With 13 A fuse.
- In blister packaging.

Article No.	EAN-Code	UP	Max. load
1 50853 3	4007123... 189717	5	13 A/250 V

Power Distribution  
BS / CEE

Plug-in Appliances  
BS

Power Distribution  
Multi-Line


Extension Sockets  
Multi-Line

Lighting & Solar Technology

Home Security & Safety

Home, Workshop & DIY

Advertising Media




### Travel Adapter USA/Euro

Adapter enabling electrical equipment using the 2-pin plug system in the USA to be used in countries using the Euro plug system. For all European countries except Great Britain.

- This travel adapter is not a transformer or a frequency converter.
- With 2,5 A fuse.
- In blister packaging.

Article No.	EAN-Code	UP	Max. load
1 50850 0 010	645848	5	2,5 A/250 V




### Travel Adapter USA/Euro

Adapter enabling electrical equipment using the 2-pin plug system in the USA to be used in countries using the Euro plug system. For all European countries except Great Britain.

- This travel adapter is not a transformer or a frequency converter.
- In blister packaging.

Article No.	EAN-Code	UP	Max. load
1 50850 0	170708	5	2,5 A/250 V






### Travel Adapter USA, Japan/Earthed

Adapter enabling electrical equipment using the USA and Japanese earthed plug system to be used in countries using an earthed socket system, e.g. DE, FR, BE, PL, NL, ES, PT, SE, FI, NO, GR, TR, AT ...

- This travel adapter is not a transformer or a frequency converter.
- In blister packaging.

Article No.	EAN-Code	UP	Max. load
1 50852 0	4007123...	5	15 A/250 V



### Travel Adapter Earthed/USA, Japan

Adapter enabling electrical equipment using earthed plug system in countries like the USA or Japanese which use an earthed socket system.

- This travel adapter is not a transformer or a frequency converter.
- Childproof socket.
- In blister packaging.

Article No.	EAN-Code	UP	Max. load
1 50855 0	561452	5	15 A/125 V

Power Distribution  
BS / CEE

Plug-in Appliances  
BS

Power Distribution  
Multi-Line

Extension Sockets  
Multi-Line

Lighting & Solar Technology

Home Security & Safety

Home, Workshop & DIY

Advertising Media

Power Distribution  
BS / CEE

Plug-In Appliances  
BS

Power Distribution  
Multi-Line

Extension Sockets  
Multi-Line

Lighting & Solar Technology

Home Security & Safety

Home, Workshop & DIY

Advertising Media



### Travel Adapter Earthed/South Africa, India

Adapter enabling electrical equipment using the earthed plug system to be used in countries with South African or India socket system.

- This travel adapter is not a transformer or a frequency converter.
- Childproof socket.
- In blister packaging.



Article No.	EAN-Code	UP	Max. load
1 50846 0	566334	5	16 A/250 V

# Ready To Travel Around The World!

## Have Gadgets, Will Travel

No matter your destination, you cannot go wrong with brennenstuhl® **8 Globetrotter plugs**, which enables you to use your electrical appliances (razor, blow-dryer, etc.) or charge your devices (smartphone, camera, navigation device, MP3 player, etc.) in more than 150 countries. Best of all: one compact, handy device does it all! No need to haul around an assortment of adapters for different outlet systems - with our device you always have the right one at hand.





### Cable Protector

- Stable, tread-resistant PVC conduit.
- Bottom section has 3 chambers.
- 2 well-spaced holes for mounting the conduit.
- Extendable.
- In poly bag with tab for hanging.

Power Distribution  
BS / CEE

Plug-in Appliances  
BS

Power Distribution  
Multi-Line

Extension Sockets  
Multi-Line

Lighting & Solar Technology

Home Security & Safety

Home, Workshop & DIY


Advertising Media

Article No.	EAN-Code 4007123...	UP	Colour	Measurements
1 16055 0	172849	5	Grey	100 x 5 x 1,2 cm
1 16065 0	172832	5	Grey	100 x 7,5 x 1,7 cm



### Spiral Coiled Tube

- Perfect solution to bundle and protect cables and lines in special surroundings as well as in offices or at home.
- Practical winding tool for quick and easy handling included.
- In blister packaging.



**2,5m** **Ø 20 mm**


Article No.	EAN-Code 4007123...	UP	Colour	Measurements
1 16436 0	562381	1	Grey	L = 2,5 m, Ø = 20 mm



## Hook And Loop Fastener

For interior and exterior use.

- Hook and loop strips.
- Perfect to fix cable bundles.
- Reusable as often as required.
- Soft and flexible material.
- In blister packaging.

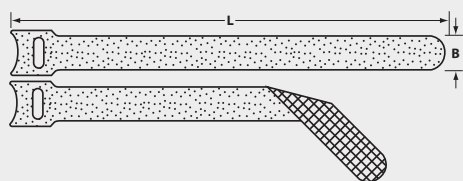

**20**  
stk/pcs

Article No.	EAN-Code	UP	Contents	Colour	Measurements
1 16435 0	562374	1	20	White	B = 12 mm x L = 125 mm
1 16434 0	562367	1	20	Black	B = 12 mm x L = 125 mm
1 16433 0	562350	1	20	White	B = 12 mm x L = 200 mm
1 16432 0	562343	1	20	Black	B = 12 mm x L = 200 mm



**Cable Reels**  
 Universal Plug System „Multi-Line“

**70**

Power Distribution  
 BS / CEE




**Domestic Cable Reels**  
 Universal Plug System „Multi-Line“


**71**

Extension Sockets  
 & Plug-In Appliances  
 BS / Lightning & Surge Protection


Universal Plug System „Multi-Line“



**British Standard**  
BS 1363



**U.S.**  
NEMA 1-15



**Euro**  
CEE 7/16

Power Distribution  
 Multi-Line

Extension Sockets  
 Multi-Line

Lighting & Solar Technology

Home Security & Safety

Home, Workshop & DIY

Advertising Media

Power Distribution  
BS / CEE

Extension Sockets  
& Plug-in Appliances  
BS / Lighting & Surge Protection

Power Distribution  
Multi-Line

Extension Sockets  
Multi-Line

Lighting & Solar Technology

Home Security & Safety

Home, Workshop & DIY


Advertising Media



### Garant® M Cable Reel

Top in quality and design, for every requirement and use.

- Reel body made from special plastic fitted to a galvanised steel tube frame.
- Universal system, 3 plug applications in one; special system allows to plug-in BS, U.S. and Euro-plugs.
- 3 sockets with self-closing covers providing protection against dust and contamination.
- Ergonomic cable guide handle for perfect cable-management during winding.
- With thermal cut-out protection against overheating or overload.



Article No.	EAN-Code 4007123...	UP	Cable length	Cable	Cable quality	Cable colour	Reel-Ø	Nominal current	Plug
<b>1 21805 7 900</b>	632749	1	25 m	H05VV-F 3G1,5	Plastic	Black	240 mm	13 A	BS 1363
<b>1 20806 7 900</b>	632756	1	50 m	H05VV-F 3G1,5	Plastic	Black	290 mm	13 A	BS 1363


Design protected. / Patent pending.



### Garant® SM 3 Cable Reel

The robust cable reel made of rust-resistant, hot-dip galvanised steel sheet.

- Reel body made from rust-resistant and galvanised sheet steel.
- Universal system, 3 plug applications in one; special system allows to plug-in BS, U.S. and Euro-plugs.
- 3 sockets with self-closing covers providing protection against dust and contamination.
- Ergonomic cable guide handle for perfect cable-management during winding.
- With thermal cut-out protection against overheating or overload.




Article No.	EAN-Code 4007123...	UP	Cable length	Cable	Cable quality	Cable colour	Reel-Ø	Nominal current	Plug
<b>1 19805 7 900</b>	632763	1	25 m	H05VV-F 3G1,5	Plastic	Black	240 mm	13 A	BS 1363
<b>1 19806 7 900</b>	632862	1	50 m	H05VV-F 3G1,5	Plastic	Black	290 mm	13 A	BS 1363

Patent pending.



## Compact AK 180 M Cable Reel

- Universal system, 3 plug applications in one; special system allows to plug-in BS, U.S. and Euro-plugs.
- 3 sockets with self-closing covers providing protection against dust and contamination.
- Small and handy reel, fits in most tool boxes.
- With thermal cut-out protection against overheating or overload.

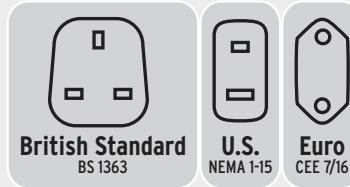

Article No.	EAN-Code 4007123...	UP	Cable length	Cable	Cable quality	Cable colour	Reel-Ø	Nominal current	Plug
1 07818 7 900	633456	4	15 m	H05VV-F 3G1,5	Plastic	Black	180 mm	13 A	BS 1363


Design protected.



## Vario-Line M Cable Box

A compact, handy cable reel for home, office and DIY.

- Housing made of break-resistant plastic.
- Practical carrying handle.
- Twin feet ensure excellent stability.
- Universal system, 3 plug applications in one; special system allows to plug-in BS, U.S. and Euro-plugs.
- 3 sockets with self-closing covers providing protection against dust and contamination.
- Easy to wind and rewind.
- With thermal cut-out protection against overheating or overload.

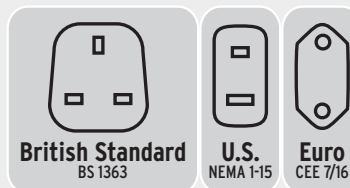

Article No.	EAN-Code 4007123...	UP	Cable length	Cable	Cable quality	Cable colour	Colour	Nominal current	Plug
1 09820 7 900	632879	5	5 m	H05VV-F 3G1,5	Plastic	Black	Black/Blue	13 A	BS 1363
1 10856 7 900	632893	5	10 m	H05VV-F 3G1,5	Plastic	Black	Black/Blue	13 A	BS 1363

Power Distribution  
BS / CEE

Extension Sockets  
BS / Lighting & Surge Protection

Power Distribution  
Multi-Line

Extension Sockets  
Multi-Line

Lighting & Solar Technology

Home Security & Safety

Home, Workshop & DIY

Advertising Media







**Premium-Alu-Multi-Line**

**74**

Power Distribution  
BS / CEE



**Premium-Multi-Line**

**76**

Extension Sockets  
BS / Lightning & Surge Protection




**Premium-Office-Multi-Line**


**77**

Power Distribution  
Multi-Line


Universal Plug System „Multi-Line“



**British Standard**  
BS 1363



**U.S.**  
NEMA 1-15



**Euro**  
CEE 7/16

Extension Sockets  
Multi-Line

Lighting & Solar Technology

Home Security & Safety

Home, Workshop & DIY


Advertising Media



## Premium-Alu-Multi-Line Extension Socket

Aluminium case.

- Attractive, timeless, sturdy housing made from aluminium with hardwearing, matt-finished surfaces.
- Hole suitable for hanging.
- Wall-mounting holes.
- Universal system, 3 plug applications in one; special system allows to plug-in BS, U.S. and Euro-plugs.
- Excess cable can be wound around the housing.
- Extra robustness.
- Childproof socket.
- With illuminated 2-pole ON/OFF switch.
- Packaging: Shrink-wrapped - for protection against dust and contamination.




Article No.	EAN-Code	UP	Cable length	Cable	Length approx.	Socket	Nominal current	Plug
<b>5-way, 3 m cable</b>								
1 39100 7 135	565900	4	3 m	05VV-F 3G1,25	43 cm	5	13 A	BS 1363
<b>5-way, 5 m cable</b>								
1 39100 7 155	592487	4	5 m	05VV-F 3G1,25	43 cm	5	13 A	BS 1363



Power Distribution BS / CEE  
 Extension Sockets & Plug-in Appliances BS / Lightning & Surge Protection  
 Power Distribution Multi-Line  
 Extension Sockets Multi-Line  
 Lighting & Solar Technology  
 Home Security & Safety  
 Home, Workshop & DIY  
 Advertising Media



## Premium-Alu-Multi-Line Extension Socket

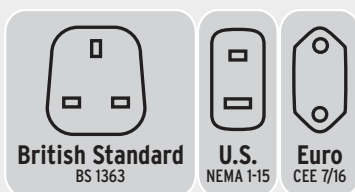

- Quality extension sockets in top design and modern colour combinations.
- Attractive, timeless, sturdy housing made from aluminium with hardwearing, matt-finished surfaces.
- With 2 holes on either side suitable for wall-mounting.
- Universal system, 3 plug applications in one; special system allows to plug-in BS, U.S. and Euro-plugs.
- Innovative and individual fixture system.
- Childproof socket.
- Excess cable can be wound around the housing.
- With illuminated 2-pole ON/OFF switch.
- Packaging: Shrink-wrapped - for protection against dust and contamination.



Article No.	EAN-Code	UP	Cable length	Cable	Length approx.	Socket	Colour	Nominal current	Plug
<b>3-way, 3 m cable</b>									
1 39100 7 333	642526	4	3 m	05VV-F 3G1,25	42 cm	3	Blue	13 A	BS 1363
<b>3-way, 5 m cable</b>									
1 39100 7 553	642519	4	5 m	05VV-F 3G1,25	42 cm	3	Light Grey	13 A	BS 1363

Patent pending.

Power Distribution  
BS / CEE

Extension Sockets  
& Plug-In Appliances  
BS / Lightning & Surge Protection

Power Distribution  
Multi-Line

Extension Sockets  
Multi-Line

Lighting & Solar Technology

Home Security & Safety


Home, Workshop & DIY

Advertising Media



## Premium-Multi-Line Extension Socket

- Quality extension sockets in top design and modern colour combinations.
- Attractive, timeless, sturdy housing made from aluminium with hardwearing, matt-finished surfaces.
- With 2 holes on either side suitable for wall-mounting.
- Universal system, 3 plug applications in one; special system allows to plug-in BS, U.S. and Euro-plugs.
- Innovative and individual fixture system.
- Childproof socket.
- Excess cable can be wound around the housing.
- With illuminated 2-pole ON/OFF switch.
- Packaging: Shrink-wrapped - for protection against dust and contamination.

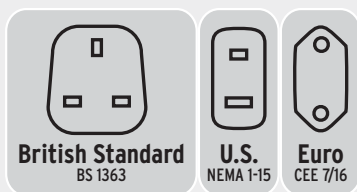

Article No.	EAN-Code	UP	Cable length	Cable	Length approx.	Socket	Colour	Nominal current	Plug
<b>3-way, 3 m cable</b>									
1 95133 7 900	626878	4	3 m	05VV-F 3G1,25	42 cm	3	Black/Blue	13 A	BS 1363
<b>3-way, 5 m cable</b>									
1 95153 7 900	626885	4	5 m	05VV-F 3G1,25	42 cm	3	Black/Light Grey	13 A	BS 1363
<b>5-way, 3 m cable</b>									
1 15600 7 135	565870	4	3 m	05VV-F 3G1,25	42 cm	5	Black	13 A	BS 1363
1 15605 7 135	591084	4	3 m	05VV-F 3G1,25	42 cm	5	Black/Light Grey	13 A	BS 1363
1 15603 7 135	591077	4	3 m	05VV-F 3G1,25	42 cm	5	Black/Blue	13 A	BS 1363
1 15655 7 135	591107	4	3 m	05VV-F 3G1,25	42 cm	5	Light Grey	13 A	BS 1363
1 15650 7 135	565917	4	3 m	05VV-F 3G1,25	42 cm	5	Light Grey/Black	13 A	BS 1363

Power Distribution  
BS / CEE

Extension Sockets  
& Plug-in Appliances  
BS / Lightning & Surge Protection

Power Distribution  
Multi-Line

Extension Sockets  
Multi-Line

Lighting & Solar Technology

Home Security & Safety

Home, Workshop & DIY

Advertising Media



Article No.	EAN-Code 4007123...	UP	Cable length	Cable	Length approx.	Socket	Colour	Nominal current	Plug
<b>5-way, 5 m cable</b>									
1 15600 7 155	565887	4	5 m	05VV-F 3G1,25	42 cm	5	Black	13 A	BS 1363
1 15605 7 155	602797	4	5 m	05VV-F 3G1,25	42 cm	5	Black/Light Grey	13 A	BS 1363
1 15655 7 155	602803	4	5 m	05VV-F 3G1,25	42 cm	5	Light Grey	13 A	BS 1363
1 15650 7 155	591817	4	5 m	05VV-F 3G1,25	42 cm	5	Light Grey/Black	13 A	BS 1363


Patent pending.



## Premium-Office-Multi-Line Extension Socket

Elegant, timeless design with different appliances on the desk.

- Comfortable to directly plug-in and switch-on the desk.
- No more tedious bending to switch off all appliances at once.
- Universal system, 3 plug applications in one; special system allows to plug-in BS, U.S. and Euro-plugs.
- Illuminated 2-pole ON/OFF safety switch.
- Childproof sockets.
- Packaging: Shrink-wrapped - for protection against dust and contamination.

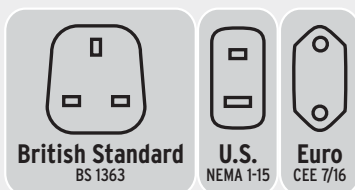

**FOR NON-EUROPEAN COUNTRIES ONLY!**



Article No.	EAN-Code 4007123...	UP	Cable length	Cable	Length approx.	Socket	Colour	Nominal current	Plug
1 15605 7 415	591886	1	3 m	05VV-F 3G1,25	38 cm	5	Black/Light Grey	13 A	BS 1363
1 15603 7 415	631247	1	3 m	05VV-F 3G1,25	38 cm	5	Black/Blue	13 A	BS 1363

Power Distribution  
BS / CEE

Extension Sockets  
& Plug-In Appliances  
BS / Lightning & Surge Protection

Power Distribution  
Multi-Line

Extension Sockets  
Multi-Line

Lighting & Solar Technology

Home Security & Safety

Home, Workshop & DIY

Advertising Media



Power Distribution  
BS / CEE

Extension Sockets  
& Plug-in Appliances  
BS / Lighting & Surge Protection

Power Distribution  
Multi-Line

Extension Sockets  
Multi-Line

Lighting & Solar Technology

Home Security & Safety

Home, Workshop & DIY

Advertising Media





LED-/Head-Torches

80

Power Distribution  
BS / CEE



Rechargeable Hand Lamps

86

Extension Sockets  
& Plug-In Appliances  
BS / Lightning & Surge Protection



Inspection Lamps

92

Power Distribution  
Multi-Line



Site Lighting, Tripods & Lamps

95

Extension Sockets  
Multi-Line



Wall-mounted Lamps

104

Lighting & Solar Technology



Movement Detectors

127

Home Security & Safety



Solar LED Lamps

128

Home, Workshop & DIY



Advertising Media

Power Distribution  
BS / CEE

Extension Sockets  
& Plug-in Appliances  
BS / Lightning & Surge Protection

Power Distribution  
Multi-Line

Extension Sockets  
Multi-Line

Lighting

Home Security & Safety

Home, Workshop & DIY

Advertising Media



**NEW**



**850 Lumen**  
CREE-LED

## LuxPremium Rechargeable Selector LED-Flashlight TL 850AS IP 54

For the highest demands for quality and function.

- With extra bright CREE-LED for powerful light.
- Mode selector for fast selection of the desired function.
- Several features: 100 % - 50 % - 20 % - 2 % - strobe - SOS.
- Tactical on/off switch with soft-touch function.
- With integrated Li-Ion-battery 3.7 V/2.5 Ah.
- Including 100 - 240 V AC, 50/60 Hz power adapter and 12 - 24 V car charger and USB charger cable.
- Resistant aluminum casing with anti-roll and carrier handle.
- With adapter earthed/BS.
- In blister packaging.

Article No.	EAN-Code	UP	LEDs	Luminous flux	Headlight range	Light duration	Measurements
1 17868 3	644384	1	CREE-LED	850 lm	270 m	2 h	L = 160 mm; Ø = 40 mm

## LuxPremium Rechargeable-LED-Flashlight TL 700A IP 68

The long-lasting power flashlight for the most powerful light.



**NEW**



**700 Lumen**  
10 W CREE-LED

- With extremely bright 10 W CREE-LED.
- Durable aluminum housing with wrist strap.
- Switch with soft-touch function for 100 % - 70 % - 40 % - strobe - SOS.
- Long operating life due to dual Li-Ion batteries 3.7 V/2.0 Ah battery.
- Including high-power adapter (100 - 240 V AC, 50/60 Hz) for short charging times and 12 - 24 V car charger.
- With adapter earthed/BS.
- Inclusive charger 2-pin.
- In blister packaging.

Article No.	EAN-Code	UP	LEDs	Luminous flux	Light duration	Length approx.	Diameter approx.
1 17860 3 600	644407	1	10 W CREE	700 lm	4 h	25,5 cm	58 mm





## LuxPremium Rechargeable-Fokus-LED-Flashlight TL 500AF IP 44

Extremely bright LED flashlight with high-quality focus function.

- With extra bright CREE-LEDs for powerful light.
- Switch with soft-touch function for 100 % - 30 % - SOS.
- Infinitely focus from laminary light nearby to high beam focused light.
- Durable aluminum housing with wrist strap.
- Integrated Li-Ion battery 3.7 V/2.0 Ah with charging indicator.
- Including high-power adapter (100 - 240 V AC, 50/60 Hz) for short charging times and 12 - 24 V car charger.
- With adapter earthed/BS.
- Inclusive charger 2-pin.
- In blister packaging.



**500 Lumen**  
**10 W CREE-LED**

Article No.	EAN-Code	UP	LEDs	Luminous flux	Light duration	Length approx.	Diameter approx.
1 17860 3 400	638895	1	CREE-LED	450 lm	2 h	15,8 cm	42 mm



## LuxPremium Rechargeable-Focus-Selector-LED-Flashlight TL 350AFS IP 44

Combines high brightness and fast function selection.

- With extremely bright 10 W CREE-LED.
- Mode selector for fast selection of the desired function.
- Several features: 100 % - 70 % - 40 % - 10 % - strobe - SOS.
- Infinitely focus from laminary light nearby to high beam focused light.
- Durable aluminum housing with wrist strap.
- With integrated Li-Ion-battery 3.7 V/2.0 Ah.
- Inclusive 100 - 240 V AC, 50/60 Hz charger and 12 - 24 V charger for car cigarette lighter.
- With adapter earthed/BS.
- Inclusive charger 2-pin.
- In blister packaging.



**350 Lumen**  
**5 W CREE-LED**

Article No.	EAN-Code	UP	LEDs	Luminous flux	Light duration	Length approx.	Diameter approx.
1 17860 3 200	637089	1	10 W CREE	350 lm	4 h	18,4 cm	43 mm

Power Distribution  
BS / CEE

Extension Sockets  
& Plug-In Appliances  
BS / Lightning & Surge Protection

Power Distribution  
Multi-Line

Extension Sockets  
Multi-Line

Lighting

Home Security & Safety

Home, Workshop & DIY

Advertising Media

## LuxPremium Rechargeable-Focus-LED-Flashlight TL 250AF IP 44

Handy LED torch with high light output.



- With extra bright CREE-LED for powerful light.
- Infinitely focus from laminary light nearby to high beam focused light.
- Durable aluminum housing with wrist strap.
- Switch with soft-touch function for 100 % - 30 % - SOS.
- Integrated Li-Ion battery 3.7 V/2.0 Ah with charging indicator.
- Inclusive 100 - 240 V AC, 50/60 Hz charger and 12 - 24 V charger for car cigarette lighter.
- With adapter earthed/BS.
- Inclusive charger 2-pin.
- In blister packaging.



Article No.	EAN-Code	UP	LEDs	Luminous flux	Light duration	Length approx.	Diameter approx.
1 17860 3 160	646265	1	5 W CREE	250 lm	3,5 h	13,6 cm	31 mm

## LuxPremium Focus-LED-Flashlight TL 250F IP 44

Highest luminosity in the smallest space.



- With extra bright CREE-LED for powerful light.
- Infinitely focus from laminary light nearby to high beam focused light.
- Switch with soft-touch function for 100 % - 30 % - SOS.
- Durable aluminum housing with wrist strap.
- In blister packaging.



Article No.	EAN-Code	UP	LEDs	Luminous flux	Headlight range	Light duration	Battery type	Measurements
1 17860 0 161	633586	1	CREE	250 lm	160 m	4 h	3 x AAA (included)	L = 13 cm; Ø = 33 mm



## LuxPremium Focus-LED-Flashlight TL 100F IP 54

Very handy Penlight with high luminosity.

- With extra bright CREE-LED for powerful light.
- Infinitely variable focus.
- Dust protected and splash-proof, IP 54.
- Durable aluminum housing with clip.
- Versatile and pocket-sized.
- In blister packaging.



Article No.	EAN-Code 4007123...	UP	LEDs	Luminous flux	Headlight range	Light duration	Battery type	Measurements
1 17860 0 051	633579	10	CREE-LED	100 lm	60 m	5 h	2 x AAA (included)	L = 14,6 cm; Ø = 16 mm



## LuxPremium-LED Demo Display

For totally 3 items!

- For displaying 3 pcs. LuxPremium-LED torches of product range 2016/2017.
- Fixed to the display by nylon wire.
- Labels and topper to be ordered separately.
- Display comes without torches.

Article No.	EAN-Code 4007123...	UP	Languages	Description	Colour	Measurements
0 99660 0	637768	1	Neutral	Display empty for 3 torches including fuses and cable ties	Red	30 x 27,5 x 35 cm
0 99661 3	637799	1	EN	Inlay	Black/Red	30 x 35 cm

Power Distribution  
BS / CEEExtension Sockets  
& Plug-In Appliances  
BS / Lightning & Surge ProtectionPower Distribution  
Multi-LineExtension Sockets  
Multi-Line

Lighting

Home Security &amp; Safety

Home, Workshop &amp; DIY

Advertising Media

## LuxPrimera Focus 150 LED Flashlight IP 54

Extreme bright LED flashlight with new focus technology.  
Continuous adjustable from a constant close light to a zooming distance light.

- With new extra bright CREE high performance LED.
- Problem-free adjustable by one-hand operation.
- Very long range.
- 2 different settings and flashing function.
- Elegant, robust aluminium housing with wrist strap.
- ON/OFF switch with soft-touch-function in „American Style“ at the end.
- Dust protected and splash-proof, IP 54.
- In blister packaging.



**150 Lumen**  
CREE-LED

Article No.	EAN-Code 4007123...	UP	LEDs	Luminous flux	Headlight range	Light duration	Battery type	Measurements
<b>1 17875 0</b>	600021	1	CREE-LED	150 lm	120 m	3,5 h	3 x AAA (included)	L = 11 cm, Ø = 30 mm

## LuxPrimera Focus 100 LED Flashlight IP 54

Extreme bright LED flashlight with new focus technology.  
Continuous adjustable from a constant close light to a zooming distance light.

- With high-performance CREE Power LED.
- Problem-free adjustable by one-hand operation.
- High range.
- 2 different settings and flashing function.
- Elegant, robust aluminium housing with wrist strap.
- ON/OFF switch with soft-touch-function in „American Style“ at the end.
- Dust protected and splash-proof, IP 54.
- In blister packaging.



**70 Lumen**  
CREE-LED

Article No.	EAN-Code 4007123...	UP	LEDs	Luminous flux	Headlight range	Light duration	Battery type	Measurements
<b>1 17874 0</b>	600014	1	CREE-LED	70 lm	50 m	3,5 h	1 x AA (included)	L = 9,7 cm, Ø = 25 mm



## Eco-LED Laser Light

Laser pointer with LED torch.

- 8 powerful LEDs.
- Handy metal housing.
- With integrated, powerful laser pointer class 2:  $P < 1 \text{ mW}$ ,  $I = 650 \text{ nm}$  (DIN 60825-1:2008-05).
- Soft-touch switch with 2 functions:
  1. LEDs on
  2. Laser pointer on.
- In blister packaging.



Article No.	EAN-Code 4007123...	UP	LEDs	Luminous flux	Headlight range	Light duration	Battery type	Measurements	Further information
<b>1 17989 0 100</b>	633807	4	8	45 lm	Laser 50 m	12 h	3 x AAA (included)	L = 11 cm, Ø = 28 mm	Laser category 2



## LuxPremium LED-Headlight KL 200F IP 44

Ultra lightweight for more comfort.

- With extra bright CREE-LED for powerful light.
- Infinitely focus from laminary light nearby to high beam focused light.
- Front and rear lights.
- Back of head battery pack for balanced and comfortable wearing.
- Switch with 4 different settings (40 %, 100 %, 100 % and red-blinking light at back, SOS).
- Focus angle can be adjusted.
- In blister packaging.



Article No.	EAN-Code 4007123...	UP	LEDs	Luminous flux	Headlight range	Light duration	Battery type	Measurements
<b>1 17878 0</b>	636761	1	CREE	200 lm	100 m	4 h	3 x AA (included)	11 x 11 x 10 cm



## LuxPremium LED-Headlight KL 100 IP 44

Ultra lightweight for more comfort.

- With extra bright Toshiba-LED for powerful light.
- Ideal for any application (work, sports, leisure) leaving both hands free.
- Switch with 3 different settings (100 %, 20 %, SOS).
- Focus angle can be adjusted.
- Back of head battery pack for balanced and comfortable wearing.
- In blister packaging.



Article No.	EAN-Code 4007123...	UP	LEDs	Luminous flux	Headlight range	Light duration	Battery type	Measurements
<b>1 17876 0</b>	636723	10	Toshiba-LED	100 lm	40 m	10 h	2 x AA (included)	6 x 2,7 x 3,4 cm

Power Distribution  
BS / CEE

Extension Sockets  
& Plug-In Appliances  
BS / Lightning & Surge Protection

Power Distribution  
Multi-Line

Extension Sockets  
Multi-Line

Lighting

Home Security & Safety

Home, Workshop & DIY

Advertising Media

## 6 + 1 LED Rechargeable Multi-Function Light HL DA 61 M3H2

Easy to use, robust and versatile.

- 6 super bright SMD LEDs on the front give up to 3 hours of light when fully charged.
- Additional switching stage for a SMD-LED light in the head.
- Charging time about 4 hours.
- Rubber-clad housing.
- Folding stand moves 170° and has an integrated magnet.
- Two magnets additionally on the back and two 360° rotating hooks for flexible use.
- Integrated Li-Ion battery 3.7 V/2.1 Ah with charging indicator.
- Inclusive 100 - 240 V AC, 50/60 Hz charger and 12 - 24 V charger for car cigarette lighter.
- With ON/OFF switch.
- In blister packaging.



Article No.	EAN-Code	UP	LEDs	Luminous flux	Colour temperature	Light duration	Measurements	Plug
1 17545 3	628926	1	6 SMD + 1 SMD	350 + 80 lm	6000 K	3 / 7 h	25 x 5 x 4 cm	BS 1363

## 6 + 1 LED Rechargeable Multi-Function Light HL2 DA 61 M3H2

Multi-purpose, robust with excellent lighting capacity.

- 6 super-bright SMD LEDs on the front with more than 3 hours of lighting if the battery is fully charged.
- Additional switching stage for a SMD-LED light in the head.
- Charging time about 4 hours.
- Rubber-clad housing.
- Base foot can be folded up to 200° with an integrated magnet.
- 2 magnets on the back and two hooks that can be rotated 360° for flexible use.
- Integrated Li-Ion rechargeable battery 3.7 V/2.2 Ah with charging indicator.
- With ON/OFF switch.
- USB charging cable included.
- Packaged in a clear box with a 6" display.



Article No.	EAN-Code	UP	LEDs	Luminous flux	Colour temperature	Light duration	Measurements
1 17567 0	641642	6	6 SMD + 1 SMD	Front: 300 lm / Spot: 100 lm	6500 K	3 h / 10 h	67 x 50 x 273 mm



## 6 LED Rechargeable Hand-Held Emergency Lamp HL DA 6 DM2H with dynamo

- Light, anytime, even without a charged battery
- Option to charge the battery with integrated dynamo.
- 6 super bright SMD LEDs with up to 9 hours of light.
- Energy-saving mode: Light power can be reduced to 30 %.
- Rubber-clad housing.
- 360° adjustable hook and magnet.
- With integrated Li-Ion-battery.
- Inclusive 100 - 240 V AC, 50/60 Hz charger and 12 V charger for car cigarette lighter.
- In blister packaging.



Article No.	EAN-Code 4007123...	UP	LEDs	Luminous flux	Measurements	Light duration	Plug
1 17859 3	633395	1	6 SMD	210 / 50 lm	30 x 6 x 4 cm	5 / 9 h	BS 1363



## Rechargeable LED Spot 10 W IP 54

Rechargeable work lamp for use indoors and outdoors, IP 54.

- Bright light, all the time, even in areas without an electrical connection.
- Splashproof.
- Equipped with integrated overcharge and total discharge protection and battery charging indicator.
- With ON/OFF switch.
- 2 regulating notches: 100 % and 50 % light (safe energy).
- Powerbank function: USB charging port for devices with USB charging cables such as smart phones, MP3 players, GPS, etc.
- Charging via micro USB connection (5 V, 1 A), USB cable included.
- Casing made of die-cast aluminum, edge protection made of high-quality plastic.
- Impact-resistant and drop-proof up to 2 m.
- Stable, multi-stage, folding frame.
- With a robust matching bag for safe transport.
- This luminaire contains built-in LED lamps.
- Light unit not replaceable.



Article No.	EAN-Code 4007123...	UP	Power	Luminous flux	Light duration	Rechargeable battery	Colour temperature
1 17308 0	646869	1	10 W	max. 1000 lm	3 h (100 %) / 6 h (50 %)	Li-Ion 3,7 V / 4400 mAh	6500 K

Power Distribution  
BS / CEEExtension Sockets  
& Plug-In Appliances  
BS / Lightning & Surge ProtectionPower Distribution  
Multi-LineExtension Sockets  
Multi-Line

Lighting

Home Security &amp; Safety

Home, Workshop &amp; DIY

Advertising Media

## 4 + 1 LED Rechargeable Clip-on Lamp HL DA 41 MC

Very easy to handle, robust with excellent lighting capacity.

- 4 super-bright Seoul SMD LEDs on the front with more than 3.5 hours of lighting when fully charged.
- Additional switching step for 1 CREE LED in the lamp head.
- Charging period approx. 3 hours.
- Clip with integrated magnet can be rotated 90°.
- Rubber-coated, ergonomic handle and carrying strap.
- Integrated Li-Ion rechargeable battery 3.7 V/1.6 Ah with charging indicator.
- With ON/OFF switch.
- USB charging cable included.
- In blister packaging.



**NEW**



Article No.	EAN-Code	UP	LEDs	Luminous flux	Colour temperature	Light duration	USB-charging units	Measurements	
1 17589 0	645831	4007123...	1	Front: 4 Seoul SMD, Top: 1 CREE	200 + 150 lm	6500 K	3,5 h / 3,5 h	1	2 x 3 x 17 cm

## 4 LED Rechargeable Hand Lamp HL DA 40 MH

Small, handy with excellent light.

- 4 super-bright SMD-LEDs on the front with up to 3 hours of lighting when fully charged.
- ON/OFF switch 100/50 %.
- Rubber-clad housing.
- Base foot with integrated magnet can be folded up to 180°.
- Belt clip and 360° rotatable hook for flexible use.
- Integrated LiFePo4 Akku 3.7 V/1.8 Ah.
- USB charging cable included.
- In blister packaging.



**NEW**



Article No.	EAN-Code	UP	LEDs	Luminous flux	Colour temperature	Light duration	Measurements	
1 17644 0	648238	4007123...	1	4 SMD	220 / 100 lm	6500 K	3 h	20 x 60 x 122 mm





## 2 + 3 LED Rechargeable Hand Lamp HL SA 23 MH

Manageable, compact and reliable.

- 2 extra-bright LEDs with special optics.
- Up to 2,5 hours of light ON time with fully charged battery.
- Additional switching stage for 3 x LEDs in the luminaire head with extra long light duration.
- Charging time about 2 hours.
- Adjustable up to +/- 90° with integrated magnet.
- 360° swivelled, retractable hanging hook.
- With integrated Li-Ion battery 3.7 V/650 mAh with charging indicator, overload and deep discharge protection, with USB charging interface.
- With ON/OFF switch.
- Inclusive 100 - 240 V AC, 50/60 Hz charger and 12 - 24 V charger for car cigarette lighter.
- In blister packaging.



Article No.	EAN-Code	UP	LEDs	Luminous flux	Colour temperature	Light duration	Measurements	Plug
1 17543 3	628933	1	2 + 3	78 + 12 lm	6000 K	2,5 / 10,5 h	18 x 5 x 3 cm	BS 1363

Power Distribution  
BS / CEEExtension Sockets  
& Plug-In Appliances  
BS / Lightning & Surge ProtectionPower Distribution  
Multi-LineExtension Sockets  
Multi-Line

## SMD LED-Universal Lamp HL DB 81 M1H1

Compact, practical for a variety of uses.

- 8 super bright SMD LEDs with special lens optics.
- More than 4 hours of light when fully charged.
- Additional switching step for 1 SMD LED in the lamp head.
- Plastic bracket with integrated magnet can be folded 200°.
- 360° hanging hook and magnet facility.
- With ON/OFF switch.
- In blister packaging.



**NEW**



Article No.	EAN-Code	UP	LEDs	Luminous flux	Battery type	Colour temperature	Light duration	Measurements
1 17541 0 010	641611	1	8 + 1 SMD	250 + 100 lm	3 x AA	6500 K	4 h / 10 h	5,5 x 4,7 x 21,5 cm

Lighting

Home Security &amp; Safety

Home, Workshop &amp; DIY

Advertising Media

## 7 + 1 LED Clip-on Lamp HL SB 71 MC

Easy to use, compact, optimal illumination from a small lamp.

- 7 powerful LEDs with up to 6 hours of light ON time with the batteries fully charged.
- Additional setting provides another LED in the lamp head.
- Clip with integrated magnet turns 180°.
- With ON/OFF switch.
- 10 pcs. delivered in an attractive sales box.
- In blister packaging.



Article No.	EAN-Code 4007123...	UP	LEDs	Luminous flux	Battery type	Colour temperature	Light duration	Measurements
1 17599 0	628285	10	7 + 1	40 + 5 lm	3 x AAA (included)	7000 K	6 h / 15 h	16,3 x 3,4 x 1,8 cm

## 4 + 3 SMD LED-Universal Lamp HL DB43 MH

Bright light in pocket size, for multi-purpose.

- 4 super-bright SMD LEDs on the front with more than 6 hours of lighting if the batteries are full.
- Additional switching step for 3 LEDs in the lamp head.
- Plastic handle with integrated magnet, 360° bendable.
- 360° swivelled, retractable hanging hook.
- With ON/OFF switch.
- Packaged in a clear box with a 10" display.



Article No.	EAN-Code 4007123...	UP	LEDs	Luminous flux	Battery type	Colour temperature	Light duration	Measurements
1 17542 0 010	641628	10	4 SMD + 3 CREE	200 + 20 lm	3 x AAA	6500 K	6 h / 24 h	6,3 x 3,6 x 9,8 cm





## 20 + 3 SMD LED-Universal Lamp HL DB 203 MH

Bright light in pocket size, for multi-purpose.

- 20 super bright Seoul SMD LEDs with special lens optics.
- Operating time of approx. 6 hours with full battery.
- Additional switching stage for 3 x LEDs in the luminaire head with extra long light duration.
- Plastic handle with integrated magnet, 360° bendable.
- 360° swivelled, retractable hanging hook.
- With ON/OFF switch.
- 10 pcs. delivered in an attractive sales box.
- In blister packaging.



Article No.	EAN-Code	UP	LEDs	Luminous flux	Battery type	Colour temperature	Light duration	Measurements
1 17542 0	626267	10	20 SMD + 3 CREE	105 + 18 lm	3 x AAA	6000 K	6 h / 24 h	10 x 7 x 3 cm

Power Distribution  
BS / CEE

Extension Sockets  
& Plug-In Appliances  
BS / Lightning & Surge Protection

Power Distribution  
Multi-Line

Extension Sockets  
Multi-Line

Lighting

Home Security & Safety

Home, Workshop & DIY

Advertising Media

## LED Workshop Rechargeable Light SHL DA 54 S IP 54

Flexible use with excellent light and ON/OFF switch.  
Dust protected and splash-proof, IP 54.

- Ideal for workshops or when working on your hobby.
- 54 bright SMD LEDs with extremely long lifespan.
- Robust, ergonomically formed handle with 6 ribs to stop it against rolling away.
- Sturdy, swivel hook.
- Impact and break-proof protective tube with glare protection.
- With built-in Li-Ion battery 3.7 V/3 Ah, charging time approx. 3,5 hours, operating time approx. 3 hours with built-in overcharging and deep discharge protection.
- Inclusive 100 - 240 V AC, 50/60 Hz charger and 12 - 24 V charger for car cigarette lighter.
- In blister packaging.



Article No.	EAN-Code	UP	LEDs	Luminous flux	Colour temperature	Light duration	Length approx.
1 17548 3	629350	1	54 SMD	380 lm	6500 K	3 h	44 cm

## LED Automotive & Workshop Inspection Lamp SHL DN 54 S IP 54

Strong light, impact and shock resistant, with ON/OFF switch.  
Dust protected and splash-proof, IP 54.

- Ideal for workshop and hobby applications.
- 54 bright SMD LEDs with extremely long lifespan.
- Impact and break-proof protective tube with glare protection.
- Robust, ergonomically formed handle with 6 ribs to stop it against rolling away.
- Sturdy, swivel hook.
- This luminaire contains built-in LED lamps.
- Light unit not replaceable.
- In blister packaging.
- Energy efficiency class: A +



Article No.	EAN-Code	UP	Cable length	Cable	LEDs	Luminous flux	Lamp efficacy	Colour temperature	Length approx.
1 17547 3	629329	1	5 m	H05RN-F 2x1,0	54 SMD	420 lm	84 lm/W	6500 K	44 cm

Power Distribution  
BS / CEE

Extension Sockets  
& Plug-in Appliances  
BS / Lighting & Surge Protection

Power Distribution  
Multi-Line

Extension Sockets  
Multi-Line

Lighting

Home Security & Safety

Home, Workshop & DIY

Advertising Media



## Griplight

- Heavy-duty inspection lamp with spring-loaded plastic grip handle and hanging hook.
- Glass bulb protector and wire basket.



Article No.	EAN-Code	UP	Cable length	Cable	Power	Fittings	Plug
1 17611 3	093267	6	5 m	H05VV-F 2x0,75	60 W	E27	BS 1363

Design protected.



Power Distribution  
BS / CEE

Extension Sockets  
& Plug-In Appliances  
BS / Lightning & Surge Protection

Power Distribution  
Multi-Line

Extension Sockets  
Multi-Line

Lighting

Home Security & Safety

Home, Workshop & DIY

Advertising Media

## Rubber Handlamp



- A robust and handy inspection lamp.
- Handle made of high quality hard rubber for comfort when in constant use.
- Glass bulb protector and wire basket.
- 240 V.



Article No.	EAN-Code	UP	Cable length	Cable	Power	Fittings	Plug
1 17678 3	021987	10	5 m	H05VV-F 2x0,75	60 W	E27	BS 1363

## Safety Inspection Lamp



- Competitively priced.
- With impact-resistant, flexible basket.
- Glass bulb protector.
- 240 V.



Article No.	EAN-Code	UP	Cable length	Cable	Power	Fittings	Plug
1 17601 3	021970	10	5 m	H05VV-F 2x0,75	60 W	E27	BS 1363

Power Distribution  
BS / CEE

Extension Sockets  
& Plug-in Appliances  
BS / Lightning & Surge Protection

Power Distribution  
Multi-Line

Extension Sockets  
Multi-Line

Lighting

Home Security & Safety

Home, Workshop & DIY

Advertising Media



## Compact LED Light ML CN 130 1S V2 IP 54

For indoor and outdoor use, IP 54.

30 W mobile high-power Chip LED Light with extra-wide light diffusion to illuminate a large area.

- Low heat generation, no danger of injury.
- Chip LEDs have an extremely long lifespan, are shock-proof, maintenance-free.
- Solid aluminum housing with rubberized wrap for additional shock protection.
- Adjustable folding stand, also suitable for mounting on tripod 117061 O.
- Easily portable with carrying handle.
- Childproof socket with self-closing cover, water-jet protected.
- ON/OFF switch.
- In colourful display-packaging.
- This luminaire contains built-in LED lamps.
- Light unit not replaceable.
- Energy efficiency class: A

**NEW**



Article No.	EAN-Code	UP	Cable length	Cable	Power	Luminous flux	Lamp efficacy	Colour temperature	Plug
1 17133 3 312	639908	1	5 m	H07RN-F 3G1,5	30 W	2650 lm	85 lm/W	5700 K	BS 1363

Power Distribution  
BS / CEE

Extension Sockets  
& Plug-In Appliances  
BS / Lightning & Surge Protection

Power Distribution  
Multi-Line

Extension Sockets  
Multi-Line



## Chip LED Light With Tripod SL CN 150 V2 IP 65

Ideal for outdoor use.

Tripod with high-power COB LED light, with extra-wide light diffusion to illuminate a large area.

- Low heat generation, no danger of injury.
- Chip LEDs have an extremely long lifespan, are shock-proof, maintenance-free.
- Die-cast aluminium casing.
- Extra stable and robust tripod.
- Strong tubular steel, powder-coated.
- Stepless height adjustment from 0.8 m to 1.62 m.
- Handy, reliable locking screws.
- Three sturdy legs.
- In colourful display-packaging.
- This luminaire contains built-in LED lamps.
- Light unit not replaceable.
- Energy efficiency class: A+



**NEW**



Article No.	EAN-Code	UP	Cable length	Cable	Power	Luminous flux	Lamp efficacy	Colour temperature	Plug
1 17125 3 524	640157	1	5 m	H07RN-F 3G1,0	50 W	4230 lm	87 lm/W	6500 K	BS 1363
1 17125 3 534	640164	1	5 m	H07RN-F 3G1,0	50 W	4230 lm	87 lm/W	6500 K	110 V

Lighting

Home Security & Safety

Home, Workshop & DIY

Advertising Media

## Mobile Chip LED Light ML CN 130 V2 IP 65

For outdoor use.

30 W high power Chip LED Light for wall installation, with extra-wide light diffusion to illuminate a large area.



- Low heat generation, no danger of injury.
- Chip LEDs have an extremely long lifespan, are shock-proof, maintenance-free.
- Die-cast aluminium casing.
- Stable, shock-absorbing steel-tube frame with ergonomic carrying handle.
- Spotlight mechanism can be swivelled and locked.
- With safety glass.
- In colourful display-packaging.
- This luminaire contains built-in LED lamps.
- Light unit not replaceable.
- Energy efficiency class: A+

**NEW**



Article No.	EAN-Code	UP	Cable length	Cable	Power	Luminous flux	Lamp efficacy	Colour temperature	Plug
	4007123...								
<b>1 17125 3 323</b>	640096	1	5 m	H07RN-F 3G1,0	30 W	2550 lm	88 lm/W	6500 K	BS 1363
<b>1 17125 3 333</b>	640102	1	5 m	H07RN-F 3G1,0	30 W	2550 lm	88 lm/W	6500 K	110 V

## Mobile Chip LED Light ML CN 110 V2 IP 65

For outdoor use.

10 W high power Chip LED Light for wall installation, with extra-wide light diffusion to illuminate a large area.



- Low heat generation, no danger of injury.
- Chip LEDs have an extremely long lifespan, are shock-proof, maintenance-free.
- Die-cast aluminium casing.
- Stable, shock-absorbing steel-tube frame with ergonomic carrying handle.
- Spotlight mechanism can be swivelled and locked.
- With safety glass.
- In colourful display-packaging.
- This luminaire contains built-in LED lamps.
- Light unit not replaceable.
- Energy efficiency class: A+

**NEW**



Article No.	EAN-Code	UP	Cable length	Cable	Power	Luminous flux	Lamp efficacy	Colour temperature	Plug
	4007123...								
<b>1 17125 3 123</b>	639960	1	2 m	H05RN-F 3G1,0	10 W	750 lm	75 lm/W	6500 K	BS 1363
<b>1 17125 3 133</b>	639977	1	2 m	H05RN-F 3G1,0	10 W	750 lm	75 lm/W	6500 K	110 V





## Mobile SMD LED Light ML DN 4006 S IP 54

Ideal for in- and outdoor, IP 54.

LED-Spot with 40 super bright SMD-LEDs.

- Low heat generation, no danger of injury.
- LEDs have a very long lifespan, are shock-proof and maintenance-free.
- Die-cast aluminium casting with coated surface.
- Stable frame.
- Carrying handle with foam grip.
- Spotlight mechanism can be swivelled and locked.
- With safety glass.
- With ON/OFF switch.
- In colourful display-packaging.
- This light contains built-in lamps.
- Light unit not replaceable.
- Energy efficiency class: A

Power Distribution  
BS / CEE

Extension Sockets  
& Plug-In Appliances  
BS / Lightning & Surge Protection

Power Distribution  
Multi-Line

Extension Sockets  
Multi-Line

Lighting

Home Security & Safety

Home, Workshop & DIY

Advertising Media

**NEW**

LED: LG Innotek



Article No.	EAN-Code 4007123...	UP	Cable length	Cable	LEDs	Power	Luminous flux	Lamp efficacy	Colour temperature	Plug
<b>1 17383 3</b>	650293	1	2 m	H05RN-F 3G1,0	40 x 0,6 W	30 W	2350 lm	78 lm/W	5700 K	BS 1363



## Mobile SMD LED Light ML DN 2806 S IP 54

Ideal for in- and outdoor, IP 54.

LED-Spot with 28 super bright SMD-LEDs.

- Low heat generation, no danger of injury.
- LEDs have a very long lifespan, are shock-proof and maintenance-free.
- Die-cast aluminium casting with coated surface.
- Stable frame.
- Carrying handle with foam grip.
- Spotlight mechanism can be swivelled and locked.
- With safety glass.
- With ON/OFF switch.
- In colourful display-packaging.
- This light contains built-in lamps.
- Light unit not replaceable.
- Energy efficiency class: A



**NEW**

LED: LG Innotek



Article No.	EAN-Code 4007123...	UP	Cable length	Cable	LEDs	Power	Luminous flux	Lamp efficacy	Colour temperature	Plug
<b>1 17382 3</b>	650309	1	2 m	H05RN-F 3G1,0	28 x 0,6 W	20 W	1720 lm	86 lm/W	5700 K	BS 1363
<b>1 17382 3 110</b>	651818	1	2 m	H05RN-F 3G1,0	28 x 0,6 W	20 W	1720 lm	86 lm/W	5700 K	110 V

## Tripod SMD-LED Light SL DN 2806 S IP 54

Ideal for in- and outdoor, IP 54.

LED-Spot with 28 super bright SMD-LEDs.





- Low heat generation, no danger of injury.
- SMD LEDs have a very long lifespan, are shock-proof and maintenance-free.
- Die-cast aluminium casing.
- Spotlight mechanism can be swivelled and locked.
- Extra stable and robust tripod.
- Strong tubular steel, powder-coated.
- Telescopic from 0.9 - 2 m.
- Handy and reliable tube clamping nuts.
- Three sturdy legs.
- 3 m oil-resistant rubber-neoprene cable with grounding-type plug.
- With ON/OFF switch.
- In colourful display-packaging.
- This luminaire contains built-in LED lamps.
- Light unit not replaceable.
- Energy efficiency class: A

**NEW**

LED:  LG Innotek



Article No.	EAN-Code	UP	Cable length	Cable	LEDs	Power	Luminous flux	Lamp efficacy	Colour temperature	Plug
1 17560 3	650286	1	3 m	H05RN-F 3G1,0	28 x 0,6 W	20 W	1720 lm	86 lm/W	5700 K	BS 1363 
1 17560 3 110	651825	1	3 m	H05RN-F 3G1,0	28 x 0,6 W	20 W	1720 lm	86 lm/W	5700 K	110 V 





## LED-Light With Tripod SL DN 2405 IP 44

LED-light with 24 super bright SMD-LEDs.  
Ideal for in- and outdoor, IP 44.

- Low heat generation, no danger of injury.
- SMD LEDs have a very long lifespan, are shock-proof and maintenance-free.
- Die-cast aluminium casting with coated surface.
- Spotlight mechanism can be swivelled and locked.
- Telescope tripod made of stable, powder coated steel piping.
- Height adjustment up to max. 1.30 m
- Handy and reliable tube clamping nuts.
- With fitting for cable storage.
- In colourful display-packaging.
- This luminaire contains built-in LED lamps.
- Light unit not replaceable.
- Energy efficiency class: A

Power Distribution  
BS / CEE

Extension Sockets  
& Plug-In Appliances  
BS / Lightning & Surge Protection

Power Distribution  
Multi-Line

Extension Sockets  
Multi-Line

Lighting

Home Security & Safety

Home, Workshop & DIY

Advertising Media

**NEW**



Article No.	EAN-Code 4007123...	UP	Cable length	Cable	LEDs	Power	Luminous flux	Lamp efficacy	Colour temperature	Plug
<b>1 17928 3 410</b>	651337	1	2 m	H05RN-F 3G1,0	24 x 0,5 W	12 W	950 lm	79 lm/W	6500 K	BS 1363

## Mobile Rechargeable Battery LED Lamp Flexible ML CA 130 F IP 54

For indoor and outdoor use, IP 54.

Flexible use 30 W rechargeable lamp with integrated magnet.



- Bright light, all the time, even in areas without an electrical connection.
- Replaceable high-quality lithium-ion battery, charging time approx. 4.5 hrs.
- Equipped with integrated overcharge and total discharge protection and battery charging indicator.
- 2 regulating notches: 100 % and 50 % light (safe energy).
- Powerbank function: USB charging port 2 A for devices with USB charging cables such as smart phones, MP3 players, tablets, etc.
- High power adapter (100 - 240V AC, 50/60 Hz, output 2 A) for a shorter charging time and 12 V car adapter cable included.
- Casing made of high-quality plastic.
- Stable, multi-stage, folding frame. The lamp can be standing, hung up, or mounted on metal surfaces with four strong, integrated magnets.
- Emitter can also be swivelled in the frame.
- With ON/OFF switch.
- In colourful display-packaging.
- This luminaire contains built-in LED lamps.
- Light unit not replaceable.



**NEW**



Article No.	EAN-Code	UP	Power	Luminous flux	Light duration	Lamp efficacy	Rechargeable battery	Colour temperature	Energy efficiency class
1 17143 3	635764	1	30 W	2600 lm	3 h	87 lm/W	7,4 V / 10400 mAh	6500 K	A+

### Recommended accessories:

Article No.	EAN-Code	UP	Description	Voltage	Capacity
1 17143 0 050	635825	1	Spare Li-Ion battery	7,4 V	10400 mAh



Power Distribution  
BS / CEE

Extension Sockets  
& Plug-in Appliances  
BS / Lighting & Surge Protection

Power Distribution  
Multi-Line

Extension Sockets  
Multi-Line

Lighting

Home Security & Safety

Home, Workshop & DIY

Advertising Media



## Mobile Rechargeable Battery LED Lamp Flexible ML CA 120 F IP 54

For indoor and outdoor use, IP 54.

Flexible use 20 W rechargeable lamp with integrated magnet.

- Bright light, all the time, even in areas without an electrical connection.
- Replaceable high-quality lithium-ion battery, charging time approx. 4.5 hrs.
- Equipped with integrated overcharge and total discharge protection and battery charging indicator.
- 2 regulating notches: 100 % and 50 % light (safe energy).
- Powerbank function: USB charging port 2 A for devices with USB charging cables such as smart phones, MP3 players, tablets, etc.
- Including high-power power supply unit (100 - 240 V AC, 50/60 Hz, output 1.5 A) for short charging time and 12 V vehicle charger cable.
- Casing made of high-quality plastic.
- Stable, multi-stage, folding frame. The lamp can be standing, hung up, or mounted on metal surfaces with four strong, integrated magnets.
- Emitter can also be swivelled in the frame.
- With ON/OFF switch.
- In colourful display-packaging.
- This luminaire contains built-in LED lamps.
- Light unit not replaceable.




**NEW**



Article No.	EAN-Code 4007123...	UP	Power	Luminous flux	Light duration	Lamp efficacy	Rechargeable battery	Colour temperature	Energy efficiency class
1 17142 3	635757	1	20 W	1800 lm	3 h	90 lm/W	7,4 V / 7800 mAh	6500 K	A

### Recommended accessories:

Article No.	EAN-Code 4007123...	UP	Description	Voltage	Capacity
1 17142 0 050	635832	1	Spare Li-Ion battery	7,4 V	7800 mAh



Power Distribution  
BS / CEE

Extension Sockets  
& Plug-In Appliances  
BS / Lightning & Surge Protection

Power Distribution  
Multi-Line

Extension Sockets  
Multi-Line

Lighting

Home Security & Safety

Home, Workshop & DIY

Advertising Media

## Mobile Rechargeable SMD LED Light ML DA 2407 IP 54

For indoor and outdoor use, IP 54.



- Bright light, all the time, even in areas without an electrical connection.
- Replaceable Li-ion battery, charging time approx. 3 hours.
- With integrated overcharge/deep discharge protection and battery level indicator.
- With on/off switch and two brightness settings (50 %/100 %).
- 1.0 A USB charging connection for devices with USB cables, such as smartphones, MP3 players, navigation systems, etc.
- Includes high-power power supply (100 - 240 V AC, 50/60 Hz, 1.5 A output) for shorter charging time and 12 V - 24 V car charger cable.
- Housing made of die-cast aluminium and high-grade plastic.
- Stable tubular steel frame with non-slip rubber feet.
- In colourful display-packaging.
- This luminaire contains built-in LED lamps.
- Light unit not replaceable.



**NEW**



Article No.	EAN-Code	UP	Power	Luminous flux	Light duration	Rechargeable battery	Colour temperature
1 17126 3 211	641574	1	20 W	1550 lm	ca 3 h	11,1 V / 4400 mAh	6000 K

## Mobile Rechargeable SMD LED Light ML CA 110 IP 54

For indoor and outdoor use, IP 54.



- Bright light, all the time, even in areas without an electrical connection.
- Replaceable lithium-ion battery, charging time approx. 4 hrs.
- Equipped with integrated overcharge and total discharge protection and charge indicator.
- With ON/OFF switch.
- Includes power supply (100 - 240 V AC, 50/60 Hz) and 12 V car charging cable.
- Housing made of die-cast aluminium and high-grade plastic.
- Stable tubular steel frame with non-slip rubber feet.
- In colourful display-packaging.
- This luminaire contains built-in LED lamps.
- Light unit not replaceable.



**NEW**



Article No.	EAN-Code	UP	Power	Luminous flux	Light duration	Rechargeable battery	Colour temperature
1 17126 3 111	641567	1	10 W	650 lm	ca 3 h	11,1 V / 2200 mAh	6000 K



## Professional Building Telescopic Tripod BS 250

For fixing power-jet lights and halogen lamps up to 1000 W and Chip-LED lamps.

- Hinged, extremely stable feet made from square steel section, with ground mounting plates.
- Heavy-duty, stable and robust design.
- Sturdy stand tubes, made from robust steel section, zinc-plated, continuous height adjustment up to a max. 2.5 m.
- Solid attachment with anchor screws, alternatively with included handles.
- In colourful display-packaging.



Power Distribution  
BS / CEE

Extension Sockets  
& Plug-In Appliances  
BS / Lightning & Surge Protection

Power Distribution  
Multi-Line

Extension Sockets  
Multi-Line

Lighting

Home Security & Safety

Home, Workshop & DIY

Advertising Media

Article No.	EAN-Code 4007123...	UP	Height-adjustable	Loading capacity
<b>1 17061 0</b>	190614	1	100 - 250 cm	7 kg



## Professional Site Tripod Brobusta® ST 300

Comes with diagonal bar, suitable to carry 2 halogens up to 500 W, halogen spots up to 1000 W and Chip-LED lamps.

- Extra stable and robust tripod.
- Tube made of light steel, galvanized and powder-coated.
- Extra long feet (95 cm) guarantees high stability.
- Adjustable at any height.
- Continuous height adjustment up to a max. of 3 m.
- Handy, reliable locking screws.



Article No.	EAN-Code 4007123...	UP	Height-adjustable	Loading capacity	Colour
<b>1 17031 0</b>	090433	1	115 - 300 cm	10 kg	Yellow

## Chip LED Light L CN 1200 IP 65

For installation indoors and outdoors, IP 65.

High-power Chip LED Light for wall installation, with extra-wide light diffusion to illuminate a large area.

- Illuminates house entrances, garages, courtyards, halls, etc.
- Low heat generation, no danger of injury.
- Chip LEDs have an extremely long lifespan, are shock-proof, maintenance-free.
- Die-cast aluminium casing.
- With safety glass.
- Adjustable mounting bracket.
- In colourful display-packaging.
- This luminaire contains built-in LED lamps.
- Light unit not replaceable.



**NEW**



Article No.	EAN-Code	UP	LEDs	Power	Luminous flux	Lamp efficacy	Colour temperature	Energy efficiency class	
1 17125 0 020	634071	4007123...	1	4 x 50 W	200 W	15700 lm	81 lm/W	6500 K	A

## Chip LED Light L CN 1150 IP 65

For installation indoors and outdoors, IP 65.

High-power Chip LED Light for wall installation, with extra-wide light diffusion to illuminate a large area.

- Illuminates house entrances, garages, courtyards, halls, etc.
- Low heat generation, no danger of injury.
- Chip LEDs have an extremely long lifespan, are shock-proof, maintenance-free.
- Die-cast aluminium casing.
- With safety glass.
- Adjustable mounting bracket.
- In colourful display-packaging.
- This luminaire contains built-in LED lamps.
- Light unit not replaceable.



**NEW**



Article No.	EAN-Code	UP	LEDs	Power	Luminous flux	Lamp efficacy	Colour temperature	Energy efficiency class	
1 17125 0 015	634064	4007123...	1	2 x 75 W	150 W	11700 lm	82 lm/W	6500 K	A +





**NEW**

## Chip LED Light L CN 1100 IP 65

For installation indoors and outdoors, IP 65.

High-power Chip LED Light for wall installation, with extra-wide light diffusion to illuminate a large area.

- Illuminates house entrances, garages, courtyards, halls, etc.
- Low heat generation, no danger of injury.
- Chip LEDs have an extremely long lifespan, are shock-proof, maintenance-free.
- Die-cast aluminium casing.
- With safety glass.
- Adjustable mounting bracket.
- In colourful display-packaging.
- This luminaire contains built-in LED lamps.
- Light unit not replaceable.



Article No.	EAN-Code	UP	LEDs	Power	Luminous flux	Lamp efficacy	Colour temperature	Energy efficiency class
1 17125 0 010	634057	1	2 x 50 W	100 W	9000 lm	83 lm/W	6500 K	A



**NEW**

## Chip LED Light L CN 180 V2 IP 65

For installation indoors and outdoors, IP 65.

80 W high-power COB (Chip on Board) LED light for wall installation, with extra-wide light diffusion to illuminate a large area.

- Ideal for hobby, workshops and construction sites. Illuminates house entrances, garages, courtyards, halls, etc.
- Low heat generation, no danger of injury.
- Chip LEDs have an extremely long lifespan, are shock-proof, maintenance-free.
- Die-cast aluminium casing.
- With safety glass.
- Adjustable mounting bracket for mounting on a tripod 117061 0 or 117031 0.
- In colourful display-packaging.
- This luminaire contains built-in LED lamps.
- Light unit not replaceable.



Article No.	EAN-Code	UP	Power	Luminous flux	Lamp efficacy	Colour temperature	Energy efficiency class
1 17125 0 821	640171	1	80 W	6720 lm	90 lm/W	6500 K	A+

Power Distribution  
BS / CEE

Extension Sockets  
& Plug-In Appliances  
BS / Lightning & Surge Protection

Power Distribution  
Multi-Line

Extension Sockets  
Multi-Line

Lighting

Home Security & Safety

Home, Workshop & DIY

Advertising Media



## Chip LED Light L CN 150 V2 IP 65

For installation indoors and outdoors, IP 65.  
50 W high-power COB (Chip on Board) LED light for wall installation, with extra-wide light diffusion to illuminate a large area.

- Ideal for hobby, workshops and construction sites.  
Illuminates house entrances, garages, courtyards, halls, etc.
- Low heat generation, no danger of injury.
- Chip LEDs have an extremely long lifespan, are shock-proof, maintenance-free.
- Die-cast aluminium casing.
- With safety glass.
- Adjustable mounting bracket for mounting on a tripod 117061 O or 117031 O.
- In colourful display-packaging.
- This luminaire contains built-in LED lamps.
- Light unit not replaceable.



Article No.	EAN-Code	UP	Power	Luminous flux	Lamp efficacy	Colour temperature	Energy efficiency class
1 17125 0 521	640119	1	50 W	4230 lm	87 lm/W	6500 K	A+



## Chip LED Light L CN 150 PIR V2 IP 44 with PIR sensor

For outdoor use.  
50 W high power Chip LED Light for wall installation, with extra-wide light diffusion to illuminate a large area.

- Ideal for hobbyists, workshops and construction sites.  
Automatically illuminates house entrances, garages, courtyards, halls, etc.
- Range of detection: up to 12 metres, angle approx. 180°.
- Duty cycle adjustable between 10 sec. and 4 min.
- With twilight and sensitivity switch.
- Low heat generation, no danger of injury.
- Chip LEDs have an extremely long lifespan, are shock-proof, maintenance-free.
- Die-cast aluminium casing.
- With safety glass.
- In colourful display-packaging.
- This luminaire contains built-in LED lamps.
- Light unit not replaceable.



Article No.	EAN-Code	UP	Power	Luminous flux	Lamp efficacy	Colour temperature	Energy efficiency class
1 17125 0 522	640126	1	50 W	4230 lm	85 lm/W	6500 K	A+



## Chip LED Light L CN 130 V2 IP 65

For installation indoors and outdoors, IP 65.

30 W high-power Chip LED Light for wall installation, with extra-wide light diffusion to illuminate a large area.

- Ideal for hobby, workshops and construction sites. Illuminates house entrances, garages, courtyards, halls, etc.
- Low heat generation, no danger of injury.
- Chip LEDs have an extremely long lifespan, are shock-proof, maintenance-free.
- Die-cast aluminium casing.
- With safety glass.
- Adjustable mounting bracket for mounting on a tripod 117061 O or 117031 O.
- In colourful display-packaging.
- This luminaire contains built-in LED lamps.
- Light unit not replaceable.



Article No.	EAN-Code	UP	Power	Luminous flux	Lamp efficacy	Colour temperature	Energy efficiency class
1 17125 0 321	640041	1	30 W	2550 lm	88 lm/W	6500 K	A+



## Chip LED Light L CN 130 PIR V2 IP 44 with PIR sensor

For outdoor use.

30 W high power Chip LED Light for wall installation, with extra-wide light diffusion to illuminate a large area.

- Ideal for hobbyists, workshops and construction sites. Automatically illuminates house entrances, garages, courtyards, halls, etc.
- Range of detection: up to 12 metres, angle approx. 180°.
- Duty cycle adjustable between 10 sec. and 4 min.
- With twilight and sensitivity switch.
- Low heat generation, no danger of injury.
- Chip LEDs have an extremely long lifespan, are shock-proof, maintenance-free.
- Die-cast aluminium casing.
- With safety glass.
- In colourful display-packaging.
- This luminaire contains built-in LED lamps.
- Light unit not replaceable.



Article No.	EAN-Code	UP	Power	Luminous flux	Lamp efficacy	Colour temperature	Energy efficiency class
1 17125 0 322	640065	1	30 W	2550 lm	85 lm/W	6500 K	A+

## Chip LED Light L CN 120 V2 IP 65

For installation indoors and outdoors, IP 65.

20 W high-power Chip LED Light for wall installation, with extra-wide light diffusion to illuminate a large area.



- Ideal for hobby, workshops and construction sites. Illuminates house entrances, garages, courtyards, halls, etc.
- Low heat generation, no danger of injury.
- Chip LEDs have an extremely long lifespan, are shock-proof, maintenance-free.
- Die-cast aluminium casing.
- With safety glass.
- Adjustable mounting bracket for mounting on a tripod 117061 O or 117031 O.
- In colourful display-packaging.
- This luminaire contains built-in LED lamps.
- Light unit not replaceable.



Article No.	EAN-Code	UP	Power	Luminous flux	Lamp efficacy	Colour temperature	Energy efficiency class
1 17125 0 221	639991	1	20 W	1630 lm	84 lm/W	6500 K	A+

## Chip LED Light L CN 120 V2 PIR V2 IP 44 with PIR sensor

For outdoor use.

20 W high power Chip LED Light for wall installation, with extra-wide light diffusion to illuminate a large area.



- Ideal for hobbyists, workshops and construction sites. Automatically illuminates house entrances, garages, courtyards, halls, etc.
- Range of detection: up to 12 metres, angle approx. 180°.
- Duty cycle adjustable between 10 sec. and 4 min.
- With twilight and sensitivity switch.
- Low heat generation, no danger of injury.
- Chip LEDs have an extremely long lifespan, are shock-proof, maintenance-free.
- Die-cast aluminium casing.
- With safety glass.
- In colourful display-packaging.
- This luminaire contains built-in LED lamps.
- Light unit not replaceable.



Article No.	EAN-Code	UP	Power	Luminous flux	Lamp efficacy	Colour temperature	Energy efficiency class
1 17125 0 222	640003	1	20 W	1630 lm	82 lm/W	6500 K	A+



## Chip LED Light L CN 110 V2 IP 65

For installation indoors and outdoors, IP 65.

10 W high-power Chip LED Light for wall installation, with extra-wide light diffusion to illuminate a large area.

- Ideal for hobby, workshops and construction sites. Illuminates house entrances, garages, courtyards, halls, etc.
- Low heat generation, no danger of injury.
- Chip LEDs have an extremely long lifespan, are shock-proof, maintenance-free.
- Die-cast aluminium casing.
- With safety glass.
- Adjustable mounting bracket for mounting on a tripod 117061 O or 117031 O.
- In colourful display-packaging.
- This luminaire contains built-in LED lamps.
- Light unit not replaceable.



Article No.	EAN-Code 4007123...	UP	Power	Luminous flux	Lamp efficacy	Colour temperature	Energy efficiency class
1 17125 0 121	639922	1	10 W	750 lm	75 lm/W	6500 K	A+

Power Distribution  
BS / CEEExtension Sockets  
& Plug-In Appliances  
BS / Lightning & Surge ProtectionPower Distribution  
Multi-LineExtension Sockets  
Multi-Line

## Chip LED Light L CN 110 PIR V2 IP 44 with PIR sensor

For installation indoors and outdoors, IP 44.

10 W high-power Chip LED Light for wall installation, with extra-wide light diffusion to illuminate a large area.

- Ideal for hobbyists, workshops and construction sites. Automatically illuminates house entrances, garages, courtyards, halls, etc.
- Range of detection: up to 12 metres, angle approx. 180°.
- Duty cycle adjustable between 10 sec. and 4 min.
- With twilight and sensitivity switch.
- Low heat generation, no danger of injury.
- Chip LEDs have an extremely long lifespan, are shock-proof, maintenance-free.
- Die-cast aluminium casing.
- With safety glass.
- Adjustable mounting bracket for mounting on a tripod 117061 O or 117031 O.
- In colourful display-packaging.
- This luminaire contains built-in LED lamps.
- Light unit not replaceable.



Article No.	EAN-Code 4007123...	UP	Power	Luminous flux	Lamp efficacy	Colour temperature	Energy efficiency class
1 17125 0 122	639939	1	10 W	750 lm	71 lm/W	6500 K	A+

Lighting

Home Security &amp; Safety

Home, Workshop &amp; DIY

Advertising Media

## Halogen Light H 1000 N IP 65

For interior and exterior wall mounting, IP 65.



- Die-cast aluminium casting with coated surface.
- Optimal diffusion by means of an aluminium reflector.
- With safety glass.
- Adjustable mounting bracket for mounting on a tripod 117061 O or 117031 O.
- This luminaire is compatible with bulbs of the energy classes: B - E.
- Delivery without bulbs.



Article No.	EAN-Code	UP	Power	Fittings	Colour
1 17122 0 102	633722	1	1000 W	R7s	Black

### Recommended accessories:

Article No.	EAN-Code	UP	Description	Power	Luminous flux	Fittings	Length approx.	Energy efficiency class	E c (kWh/1000h)
1 17063 0	612390	10	Halogen bulb (Sylvania)	1000 W	20000 lm	R7s	189 mm	C	1000
1 17763 0	152728	10	Halogen bulbs (Philips)	1000 W	24200 lm	R7s	189 mm	B	1000

## Halogen Light H 500 IP 44

- Fitted to a galvanized steel-tube frame. May be tilted and clamped at any desired angle.
- With safety glass and protective grill.
- Housing made of aluminium pressure casting.
- Voltage: 220 - 240 V~, 50/60 Hz.
- In colourful display-packaging.
- This luminaire is compatible with bulbs of the energy classes: B - E.
- The luminaire is sold with a bulb of the energy class: C.
- Plug: BS 1363



Article No.	EAN-Code	UP	Cable length	Cable	Power	Luminous flux	Lamp efficacy	Colour temperature	Fittings
1 17148 3	565832	1	1,5 m	H05VV-F 3G1,0	400 W	8545 lm	21 lm/W	2900 K	R7s

### Recommended accessories:

Article No.	EAN-Code	UP	Description	Power	Luminous flux	Fittings	Length approx.	Diameter approx.	Energy efficiency class	E c (kWh/1000h)
1 17856 0 400	619573	10	Halogen bulb	400 W	8545 lm	R7s	119,6 mm	12 mm	C	400



## Halogen Light H 500 IP 54

For installation indoors and outdoors, IP 54.

- Housing and frame made of aluminium pressure casting with coated surface.
- Optimal diffusion by means of an aluminium reflector.
- With safety glass.
- Adjustable mounting bracket for mounting on a tripod 117061 O or 117031 O.
- In colourful display-packaging.
- This luminaire is compatible with bulbs of the energy classes: B - E.
- The luminaire is sold with a bulb of the energy class: C.



Article No.	EAN-Code 4007123...	UP	Power	Luminous flux	Lamp efficacy	Colour temperature	Fittings	Colour
<b>1 17138 0</b>	249503	1	400 W	8545 lm	21 lm/W	2900 K	R7s	Black
<b>1 17121 0</b>	249497	1	400 W	8545 lm	21 lm/W	2900 K	R7s	White

### Recommended accessories:

Article No.	EAN-Code 4007123...	UP	Description	Power	Luminous flux	Fittings	Length approx.	Diameter approx.	Energy efficiency class	E c (kWh/1000h)
<b>1 17856 0 400</b>	619573	10	Halogen bulb	400 W	8545 lm	R7s	119,6 mm	12 mm	C	400



## Halogen Light H 150 IP 54

For installation indoors and outdoors, IP 54.

- Housing and frame made of aluminium pressure casting with coated surface.
- Optimal diffusion by means of an aluminium reflector.
- With safety glass.
- Adjustable mounting bracket for mounting on a tripod 117061 O or 117031 O.
- In colourful display-packaging.
- This luminaire is compatible with bulbs of the energy classes: B - E.
- The luminaire is sold with a bulb of the energy class: C.



Article No.	EAN-Code 4007123...	UP	Power	Luminous flux	Lamp efficacy	Colour temperature	Fittings	Colour
<b>1 17124 0</b>	249480	1	120 W	2216 lm	18 lm/W	2900 K	R7s	Black
<b>1 17225 0</b>	249473	1	120 W	2216 lm	18 lm/W	2900 K	R7s	White

### Recommended accessories:

Article No.	EAN-Code 4007123...	UP	Description	Power	Luminous flux	Fittings	Length approx.	Diameter approx.	Energy efficiency class	E c (kWh/1000h)
<b>1 17856 0 120</b>	619498	10	Halogen bulbs	120 W	2216 lm	R7s	80 mm	12 mm	C	120



## Halogen Light H 500 IP 44 with PIR sensor

For installation indoors and outdoors, IP 44.

- Ideal for automatically lighting entryways to houses, garages, footpaths, etc. as well as for preventing break-ins and theft.
- Housing and frame made of aluminium pressure casting with coated surface.
- Range of detection: up to 12 metres, angle approx. 180°.
- Duty cycle adjustable between 15 sec. and 5 min.
- With twilight and sensitivity switch.
- In colourful display-packaging.
- This luminaire is compatible with bulbs of the energy classes: B - E.
- The luminaire is sold with a bulb of the energy class: C.



Article No.	EAN-Code 4007123...	UP	Power	Luminous flux	Lamp efficacy	Colour temperature	Fittings	Colour
<b>1 17236 0</b>	249466	1	400 W	8545 lm	21 lm/W	2900 K	R7s	Black
<b>1 17239 0</b>	249329	1	400 W	8545 lm	21 lm/W	2900 K	R7s	White

### Recommended accessories:

Article No.	EAN-Code 4007123...	UP	Description	Power	Luminous flux	Fittings	Length approx.	Diameter approx.	Energy efficiency class	E c (kWh/1000h)
<b>1 17856 0 400</b>	619573	10	Halogen bulb	400 W	8545 lm	R7s	119,6 mm	12 mm	C	400



## Halogen Light H 150 IP 44 with PIR sensor

For installation indoors and outdoors, IP 44.

- Ideal for automatically lighting entryways to houses, garages, footpaths, etc. as well as for preventing break-ins and theft.
- Housing and frame made of aluminium pressure casting with coated surface.
- Range of detection: up to 12 metres, angle approx. 180°.
- Duty cycle adjustable between 15 sec. and 5 min.
- With twilight and sensitivity switch.
- In colourful display-packaging.
- This luminaire is compatible with bulbs of the energy classes: B - E.
- The luminaire is sold with a bulb of the energy class: C.



Article No.	EAN-Code 4007123...	UP	Power	Luminous flux	Lamp efficacy	Colour temperature	Fittings	Colour
<b>1 17265 0</b>	249565	1	120 W	2216 lm	18 lm/W	2900 K	R7s	Black
<b>1 17828 0</b>	249572	1	120 W	2216 lm	18 lm/W	2900 K	R7s	White

### Recommended accessories:

Article No.	EAN-Code 4007123...	UP	Description	Power	Luminous flux	Fittings	Length approx.	Diameter approx.	Energy efficiency class	E c (kWh/1000h)
<b>1 17856 0 120</b>	619498	10	Halogen bulbs	120 W	2216 lm	R7s	80 mm	12 mm	C	120





## Power LED Lamp L2705 IP 44

For indoor or outdoor installation, IP 44.

With 27 x 0,5 W power LEDs for lighting large areas.

- Ideal for illuminating entry areas, driveways and carports.
- Low heat generation, no danger of injury.
- LEDs have a very long lifespan, are shock-proof and maintenance-free.
- Housing made of aluminium, powder-coated.
- Spotlight can be rotated and locked.
- Cover made of break resistant plastic.
- In colourful display-packaging.
- This luminaire contains built-in LED lamps.
- Light unit not replaceable.



Article No.	EAN-Code	UP	LEDs	Power	Luminous flux	Lamp efficacy	Colour temperature	Energy efficiency class
1 17334 0	609550	1	27 x 0,5 W	17 W	1080 lm	64 lm/W	6400 K	A



## Power LED Lamp L2705 PIR IP 44 with PIR sensor

For indoor or outdoor installation, IP 44.

With 27 x 0,5 W power LEDs and motion detector.

- Ideal for automatically lighting entryways to houses, garages, footpaths, etc. as well as for preventing break-ins and theft.
- Low heat generation, no danger of injury.
- LEDs have a very long lifespan, are shock-proof and maintenance-free.
- Motion detectors have a range of approx. 10 m, detection angle of approx. 130°.
- Duty cycle adjustable between 10 sec. and 4 min.
- With twilight and sensitivity switch.
- Housing made of aluminium, powder-coated.
- Spotlight can be rotated and locked.
- Cover made of break resistant plastic.
- In colourful display-packaging.
- This luminaire contains built-in LED lamps.
- Light unit not replaceable.



Article No.	EAN-Code	UP	LEDs	Power	Luminous flux	Lamp efficacy	Colour temperature	Energy efficiency class
1 17335 0	609567	1	27 x 0,5 W	17 W	1080 lm	64 lm/W	6400 K	A

## SMD LED Lamp L DN 2405 IP 44

LED-lamp with 24 super bright SMD-LEDs.

For interior and exterior wall mounting, IP 44.



- Ideal for illuminating entry areas, driveways and carports.
- Low heat generation, no danger of injury.
- LEDs have a very long lifespan, are shock-proof and maintenance-free.
- Die-cast aluminium casting with coated surface.
- With safety glass.
- Adjustable mounting bracket for mounting on a tripod 117061 O or 117031 O.
- In colourful display-packaging.
- This luminaire contains built-in LED lamps.
- Light unit not replaceable.



Article No.	EAN-Code 4007123...	UP	LEDs	Power	Luminous flux	Lamp efficacy	Colour temperature	Colour	Energy efficiency class
<b>1 17928 0 110</b>	633128	1	24 x 0,5 W	12 W	950 lm	79 lm/W	6500 K	Black	A
<b>1 17928 0 120</b>	633135	1	24 x 0,5 W	12 W	950 lm	79 lm/W	6500 K	White	A

## SMD LED Lamp L DN 2405 PIR IP 44 with PIR sensor

LED-lamp with 24 super bright SMD-LEDs.

For interior and exterior wall mounting, IP 44.



- Ideal for the automatic of lighting entrance areas, driveways, carports or for burglary and theft deterrence.
- Range of detection: up to 12 metres, angle approx. 180°.
- Duty cycle adjustable between 15 sec. and 5 min.
- With twilight and sensivity switch.
- LEDs have a very long lifespan, are shock-proof and maintenance-free.
- Low heat generation, no danger of injury.
- Die-cast aluminium casting with coated surface.
- With safety glass.
- In colourful display-packaging.
- This luminaire contains built-in LED lamps.
- Light unit not replaceable.



Article No.	EAN-Code 4007123...	UP	LEDs	Power	Luminous flux	Lamp efficacy	Colour temperature	Colour	Energy efficiency class
<b>1 17928 0 210</b>	633142	1	24 x 0,5 W	12,5 W	950 lm	76 lm/W	6500 K	Black	A
<b>1 17928 0 220</b>	633159	1	24 x 0,5 W	12,5 W	950 lm	76 lm/W	6500 K	White	A




# LIGHT UP YOUR HOME.

designed by brennenstuhl®



**ENGINEERED  
IN GERMANY**




### Unbelievably long-lasting

With an LED useful life of 50,000 h, it is not necessary to replace the lamp. They convince in terms of their processing with the high-quality, textured surfaces and the solid aluminium bodies of the spotlights & lamps.



### Environmentally friendly

80 % lower energy consumption in comparison to conventional lamps.



### Best illumination


Smart designs and high-power reflectors ensure sophisticated distribution of light. Due to the easy installation, all spotlights and lamps can be attached at the desired location in the blink of an eye.



### Simply safe

Maximum diffusion of light with low heat development makes our LED spotlight and lamp programme absolutely safe.

Easy to mount:



Power Distribution  
BS / CEE

Extension Sockets  
& Plug-In Appliances  
BS / Lightning & Surge Protection

Power Distribution  
Multi-Line

Extension Sockets  
Multi-Line

Lighting

Home Security & Safety

Home, Workshop & DIY

Advertising Media

## LED Spot Premium City SH 8005 IP 44

For interior and exterior wall mounting, IP 44.  
With 80 x 0,5 Watt high power LEDs.

- Easy to mount thanks to the power connection provided on the mounting bracket. Simply insert the light or spotlight into the bracket after mounting.
- Solid and modern aluminium casing.
- Light can be swiveled vertically and locked.
- 80 bright LG high performance LEDs.
- This luminaire contains built-in LED lamps.
- Light unit not replaceable.



Article No.	EAN-Code	UP	LEDs	Power	Luminous flux	Lamp efficacy	Colour temperature	Colour	Energy efficiency class
1 17929 0 310	633005	1	80 x 0,5 W	40 W	3700 lm	93 lm/W	6000 K	Anthracite	A+
1 17929 0 320	632992	1	80 x 0,5 W	40 W	3700 lm	93 lm/W	6000 K	White	A+

Design protected. / Patent pending.

## Sensor LED Spot Premium City SH 8005 PIR IP 44 with PIR sensor

For interior and exterior wall mounting, IP 44.  
With 80 x 0,5 Watt high power LEDs and PIR sensor.

- Easy to mount thanks to the power connection provided on the mounting bracket. Simply insert the light or spotlight into the bracket after mounting.
- Solid and modern aluminium casing.
- Light can be swiveled vertically and locked.
- 80 bright LG high performance LEDs.
- PIR sensor vertically pivoting.
- Range of detection: up to 10 metres, angle approx. 180°.
- Duty cycle adjustable between 10 sec. and 4 min.
- Continuous light function can be activated if a wall light switch is available.
- This luminaire contains built-in LED lamps.
- Light unit not replaceable.



Article No.	EAN-Code	UP	LEDs	Power	Luminous flux	Lamp efficacy	Colour temperature	Colour	Energy efficiency class
1 17929 0 311	632985	1	80 x 0,5 W	40 W	3700 lm	93 lm/W	6000 K	Anthracite	A+
1 17929 0 321	632978	1	80 x 0,5 W	40 W	3700 lm	93 lm/W	6000 K	White	A+

Design protected. / Patent pending.



## LED Light Premium City LH 8005 IP 44

For interior and exterior wall mounting, IP 44.  
With 80 x 0,5 Watt high power LEDs.

- Easy to mount thanks to the power connection provided on the mounting bracket. Simply insert the light or spotlight into the bracket after mounting.
- Solid and modern aluminium casing.
- Lamp can be rotated and vertically swiveled and locked.
- 80 bright LG high performance LEDs.
- Warmth, ambient light colour.
- This luminaire contains built-in LED lamps.
- Light unit not replaceable.



Powered by  
**LG Innotek LED**



Article No.	EAN-Code 4007123...	UP	LEDs	Power	Luminous flux	Lamp efficacy	Colour temperature	Colour	Energy efficiency class
1 17929 0 610	633043	1	80 x 0,5 W	40 W	3700 lm	93 lm/W	3000 K	Anthracite	A+
1 17929 0 620	633036	1	80 x 0,5 W	40 W	3700 lm	93 lm/W	3000 K	White	A+

Design protected. / Patent pending.



## Sensor LED Light Premium City LH 8005 PIR IP 44 with PIR sensor

For interior and exterior wall mounting, IP 44.  
With 80 x 0,5 Watt high power LEDs and PIR sensor.

- Easy to mount thanks to the power connection provided on the mounting bracket. Simply insert the light or spotlight into the bracket after mounting.
- Solid and modern aluminium casing.
- Lamp can be rotated and vertically swiveled and locked.
- 80 bright LG high performance LEDs.
- Warmth, ambient light colour.
- PIR sensor vertically pivoting.
- Range of detection: up to 10 metres, angle approx. 180°.
- Duty cycle adjustable between 10 sec. and 4 min.
- Continuous light function can be activated if a wall light switch is available.
- This luminaire contains built-in LED lamps.
- Light unit not replaceable.



Powered by  
**LG Innotek LED**



Article No.	EAN-Code 4007123...	UP	LEDs	Power	Luminous flux	Lamp efficacy	Colour temperature	Colour	Energy efficiency class
1 17929 0 611	633029	1	80 x 0,5 W	40 W	3700 lm	93 lm/W	3000 K	Anthracite	A+
1 17929 0 621	633012	1	80 x 0,5 W	40 W	3700 lm	93 lm/W	3000 K	White	A+

Design protected. / Patent pending.

Power Distribution  
BS / CEE

Extension Sockets  
& Plug-In Appliances  
BS / Lightning & Surge Protection

Power Distribution  
Multi-Line

Extension Sockets  
Multi-Line

Lighting

Home Security & Safety

Home, Workshop & DIY

Advertising Media

## LED Light Premium City LH 562405 IP 44

For interior and exterior wall mounting, IP 44.  
With 80 x 0,5 Watt high power LEDs.

- Easy to mount thanks to the power connection provided on the mounting bracket. Simply insert the light or spotlight into the bracket after mounting.
- Solid and modern aluminium casing.
- Lamp can be rotated and vertically swiveled and locked.
- 80 bright LG high performance LEDs.
- 56 LEDs facing downward and 24 LEDs facing upward.
- Warmth, ambient light colour.
- This luminaire contains built-in LED lamps.
- Light unit not replaceable.



Shining downwards  
and upwards!



Article No.	EAN-Code	UP	LEDs	Power	Luminous flux	Lamp efficacy	Colour temperature	Colour	Energy efficiency class
1 17929 0 612	633081	1	56 + 24 x 0,5 W	40 W	3700 lm	93 lm/W	3000 K	Anthracite	A+
1 17929 0 622	633074	1	56 + 24 x 0,5 W	40 W	3700 lm	93 lm/W	3000 K	White	A+

Design protected. / Patent pending.

## Sensor LED Light Premium City LH 562405 PIR IP 44 with PIR sensor

For interior and exterior wall mounting, IP 44.  
With 80 x 0,5 Watt high power LEDs and PIR sensor.

- Easy to mount thanks to the power connection provided on the mounting bracket. Simply insert the light or spotlight into the bracket after mounting.
- Solid and modern aluminium casing.
- Lamp can be rotated and vertically swiveled and locked.
- 80 bright LG high performance LEDs.
- 56 LEDs facing downward and 24 LEDs facing upward.
- Warmth, ambient light colour.
- PIR sensor vertically pivoting.
- Range of detection: up to 10 metres, angle approx. 180°.
- Duty cycle adjustable between 10 sec. and 4 min.
- Continuous light function can be activated if a wall light switch is available.
- This luminaire contains built-in LED lamps.
- Light unit not replaceable.



Shining downwards  
and upwards!



Article No.	EAN-Code	UP	LEDs	Power	Luminous flux	Lamp efficacy	Colour temperature	Colour	Energy efficiency class
1 17929 0 613	633067	1	56 + 24 x 0,5 W	40 W	3700 lm	93 lm/W	3000 K	Anthracite	A+
1 17929 0 623	633050	1	56 + 24 x 0,5 W	40 W	3700 lm	93 lm/W	3000 K	White	A+

Design protected. / Patent pending.

Power Distribution  
BS / CEE

Extension Sockets  
E-Plug-in Appliances  
BS / Lightning & Surge Protection

Power Distribution  
Multi-Line

Extension Sockets  
Multi-Line

Lighting

Home Security & Safety

Home, Workshop & DIY

Advertising Media



## LED Spotlight Duo Premium City SV5405 IP 44

For interior and exterior wall mounting, IP 44. With 54 x 0,5 Watt high power LEDs.

- Easy to mount thanks to the power connection provided on the mounting bracket. Simply insert the light or spotlight into the bracket after mounting.
- Solid and modern aluminium casing.
- 54 powerful LEDs with bunched ray of light.
- Both spotlights horizontal and vertical adjustable.
- This luminaire contains built-in LED lamps.
- Light unit not replaceable.

Power Distribution  
BS / CEEExtension Sockets  
& Plug-In Appliances  
BS / Lightning & Surge ProtectionPower Distribution  
Multi-LineExtension Sockets  
Multi-Line

Lighting

Home Security &amp; Safety

Home, Workshop &amp; DIY

Advertising Media



Article No.	EAN-Code	UP	LEDs	Power	Luminous flux	Lamp efficacy	Colour temperature	Energy efficiency class
1 17967 0	617197	1	54 x 0,5 W	30 W	2160 lm	72 lm/W	6400 K	A

Design protected. / Patent pending.



## Sensor LED Spotlight Duo Premium City SV5405 PIR IP 44

with PIR sensor

For interior and exterior wall mounting, IP 44.

With 54 x 0,5 Watt high power LEDs and motion detector.

- Easy to mount thanks to the power connection provided on the mounting bracket. Simply insert the light or spotlight into the bracket after mounting.
- Solid and modern aluminium casing.
- 54 powerful LEDs with bunched ray of light.
- PIR sensor vertically pivoting.
- Range of detection: up to 10 metres, angle approx. 180°.
- Duty cycle adjustable between 10 sec. and 4 min.
- Both spotlights horizontal and vertical adjustable.
- This luminaire contains built-in LED lamps.
- Light unit not replaceable.



Article No.	EAN-Code	UP	LEDs	Power	Luminous flux	Lamp efficacy	Colour temperature	Energy efficiency class
1 17965 0	617159	1	54 x 0,5 W	31 W	2160 lm	70 lm/W	6400 K	A

Design protected. / Patent pending.





## LED Zone Lighting Duo Premium City LV5405 IP 44

For interior and exterior wall mounting, IP 44. With 54 x 0,5 Watt high power LEDs.

- Easy to mount thanks to the power connection provided on the mounting bracket. Simply insert the light or spotlight into the bracket after mounting.
- Solid and modern aluminium casing.
- 54 powerful LEDs with frosted glass and wider illumination.
- Both lights horizontal and vertical adjustable.
- This luminaire contains built-in LED lamps.
- Light unit not replaceable.



Article No.	EAN-Code	UP	LEDs	Power	Luminous flux	Lamp efficacy	Colour temperature	Energy efficiency class
1 17968 0	617210	1	54 x 0,5 W	30 W	2160 lm	72 lm/W	6400 K	A

Design protected. / Patent pending.



## Sensor LED Zone Lighting Duo Premium City LV5405 PIR IP 44

with PIR sensor

For interior and exterior wall mounting, IP 44.

With 54 x 0,5 Watt high power LEDs and motion detector.

- Easy to mount thanks to the power connection provided on the mounting bracket. Simply insert the light or spotlight into the bracket after mounting.
- Solid and modern aluminium casing.
- 54 powerful LEDs with frosted glass and wider illumination.
- PIR sensor vertically pivoting.
- Range of detection: up to 10 metres, angle approx. 180°.
- Duty cycle adjustable between 10 sec. and 4 min.
- Both lights horizontal and vertical adjustable.
- This luminaire contains built-in LED lamps.
- Light unit not replaceable.



Article No.	EAN-Code	UP	LEDs	Power	Luminous flux	Lamp efficacy	Colour temperature	Energy efficiency class
1 17966 0	617173	1	54 x 0,5 W	31 W	2160 lm	70 lm/W	6400 K	A

Design protected. / Patent pending.





## LED Spotlight Premium City SH2705 IP 44

For interior and exterior wall mounting, IP 44.  
With 27 x 0,5 Watt high power LEDs.

- Easy to mount thanks to the power connection provided on the mounting bracket. Simply insert the light or spotlight into the bracket after mounting.
- Solid and modern aluminium casing.
- 27 powerful LEDs with bunched ray of light.
- Spotlight can be rotated and locked.
- This luminaire contains built-in LED lamps.
- Light unit not replaceable.

Power Distribution  
BS / CEEExtension Sockets  
& Plug-In Appliances  
BS / Lightning & Surge ProtectionPower Distribution  
Multi-LineExtension Sockets  
Multi-Line

Lighting

Home Security &amp; Safety

Home, Workshop &amp; DIY

Advertising Media



Article No.	EAN-Code	UP	LEDs	Power	Luminous flux	Lamp efficacy	Colour temperature	Energy efficiency class
1 17963 0	617111	1	27 x 0,5 W	17 W	1080 lm	64 lm/W	6400 K	A

Design protected. / Patent pending.



## Sensor LED Spotlight Premium City SH2705 PIR IP 44 with PIR sensor

For interior and exterior wall mounting, IP 44.  
With 27 x 0,5 Watt high power LEDs and motion detector.

- Easy to mount thanks to the power connection provided on the mounting bracket. Simply insert the light or spotlight into the bracket after mounting.
- Solid and modern aluminium casing.
- 27 powerful LEDs with bunched ray of light.
- PIR sensor vertically pivoting.
- Range of detection: up to 10 metres, angle approx. 180°.
- Duty cycle adjustable between 10 sec. and 4 min.
- Spotlight can be rotated and locked.
- This luminaire contains built-in LED lamps.
- Light unit not replaceable.



Article No.	EAN-Code	UP	LEDs	Power	Luminous flux	Lamp efficacy	Colour temperature	Energy efficiency class
1 17961 0	617074	1	27 x 0,5 W	18 W	1080 lm	60 lm/W	6400 K	A

Design protected. / Patent pending.

Power Distribution  
BS / CEE

Extension Sockets  
& Plug-in Appliances  
BS / Lighting & Surge Protection

Power Distribution  
Multi-Line

Extension Sockets  
Multi-Line

Lighting

Home Security & Safety

Home, Workshop & DIY

Advertising Media



## LED Zone Lighting Premium City LH2705 IP 44

For interior and exterior wall mounting, IP 44.  
With 27 x 0,5 Watt high power LEDs.

- Easy to mount thanks to the power connection provided on the mounting bracket. Simply insert the light or spotlight into the bracket after mounting.
- Solid and modern aluminium casing.
- 27 powerful LEDs with frosted glass for wide illumination.
- Light can be rotated and locked.
- This luminaire contains built-in LED lamps.
- Light unit not replaceable.



Article No.	EAN-Code	UP	LEDs	Power	Luminous flux	Lamp efficacy	Colour temperature	Energy efficiency class
1 17964 0	617135	1	27 x 0,5 W	17 W	1080 lm	64 lm/W	6400 K	A

Design protected. / Patent pending.



## Sensor LED Zone Lighting Premium City LH2705 PIR IP 44

with PIR sensor

For interior and exterior wall mounting, IP 44.  
With 27 x 0,5 Watt high power LEDs and motion detector.

- Easy to mount thanks to the power connection provided on the mounting bracket. Simply insert the light or spotlight into the bracket after mounting.
- Solid and modern aluminium casing.
- 27 powerful LEDs with frosted glass for wide illumination.
- PIR sensor vertically pivoting.
- Range of detection: up to 10 metres, angle approx. 180°.
- Duty cycle adjustable between 10 sec. and 4 min.
- Light can be rotated and locked.
- This luminaire contains built-in LED lamps.
- Light unit not replaceable.



Article No.	EAN-Code	UP	LEDs	Power	Luminous flux	Lamp efficacy	Colour temperature	Energy efficiency class
1 17962 0	617098	1	27 x 0,5 W	18 W	1080 lm	60 lm/W	6400 K	A

Design protected. / Patent pending.



## City LED Sales Panel

- Sales panels are the best way to realize sales deals.
- Attractive wooden display stand, digitally printed.
- 2 lights with easy connectable power plugs to demonstrate brightness at the POS.
- Size: 1/2 palette (60 x 80 cm).
- Height: 190 cm.

Article No.	EAN-Code	UP	Languages	Scope of delivery
1 17969 3 010	629480	1	EN	3 x 117963 0 + 6 x 117964 0 9 x 117962 0 3 x 117965 0 + 6 x 117966 0
1 17969 3 020	629510	1	EN	6 x 117961 0 + 6 x 117962 0 9 x 117965 0 9 x 117966 0
1 17969 3 030	629541	1	EN	9 x 117964 0, 9 x 117968 0, 6 x 117966 0, 3 x 117965 0

Power Distribution  
BS / CEEExtension Sockets  
& Plug-In Appliances  
BS / Lightning & Surge ProtectionPower Distribution  
Multi-LineExtension Sockets  
Multi-Line

Lighting

Home Security &amp; Safety

Home, Workshop &amp; DIY

Advertising Media

## LED Oval Lamp L DN 5402 IP 44

Ideal for the garage, cellar, workshop and outdoors.

- Compact LED oval lamp made of plastic with a translucent cover.
- Suitable for mounting on either walls or ceilings.
- LEDs have a very long lifespan, are shock-proof and maintenance-free.
- This luminaire contains built-in LED lamps.
- Light unit not replaceable.



**NEW**



Article No.	EAN-Code	UP	Power	Luminous flux	Lamp efficacy	Colour temperature	Colour	Measurements	Energy efficiency class
<b>1 27079 0</b>	641697	1	10 W	800 lm	80 lm/W	6400 K	Light Grey	17,5 x 12 x 6,5 cm	A+

## LED Oval Lamp L DN 3002 IP 44

Ideal for the garage, cellar, workshop and outdoors.

- Compact LED oval lamp made of plastic with a translucent cover.
- Suitable for mounting on either walls or ceilings.
- LEDs have a very long lifespan, are shock-proof and maintenance-free.
- This luminaire contains built-in LED lamps.
- Light unit not replaceable.



**NEW**



Article No.	EAN-Code	UP	Power	Luminous flux	Lamp efficacy	Colour temperature	Colour	Measurements	Energy efficiency class
<b>1 27078 0</b>	641680	1	5,5 W	460 lm	84 lm/W	6400 K	Light Grey	17,5 x 12 x 6,5 cm	A+



**NEW**

## LED Wall Light L PN 403 IP 54

For wall installation indoors and outdoors, IP 54.

- Compact LED lamp with casing made of coated aluminium and non-breakable plastic.
- Lamp can be pivoted up to 330°.
- 4 high-power LEDs with concentrated light and special optics for even light distribution.
- LEDs have a very long lifespan, are shock-proof and maintenance-free.
- In colourful display-packaging.
- This luminaire contains built-in LED lamps.
- Light unit not replaceable.



Article No.	EAN-Code 4007123...	UP	LEDs	Power	Luminous flux	Lamp efficacy	Colour temperature	Energy efficiency class
1 17390 0	644087	1	4 x 3 W	12 W	830 lm	70 lm/W	5000 K	A+



**MADE  
IN GERMANY**

## Coloured Round Lamp IP 44

Ideal for indoors and outdoors, IP 44.

- Solid housing made of plastic.
- Cover: Crystal-clear glass with inner prismatic structure.
- Suitable for mounting on either walls or ceilings.
- This luminaire is compatible with bulbs of the energy class: A++ - E.
- Delivery without bulbs.



Article No.	EAN-Code 4007123...	UP	Power	Fittings	Colour	Measurements
1 27070 0	031412	2	100 W	E27	Black	Diameter = 220 mm, Depth = 100 mm
1 27072 0	031429	2	100 W	E27	White	Diameter = 220 mm, Depth = 100 mm



**MADE  
IN GERMANY**

## Coloured Bulk Head Light IP 44

Ideal for indoors and outdoors, IP 44.

- Solid housing made of plastic.
- Cover: Crystal-clear glass with inner prismatic structure.
- Suitable for mounting on either walls or ceilings.
- This luminaire is compatible with bulbs of the energy class: A++ - E.
- Delivery without bulbs.



Article No.	EAN-Code 4007123...	UP	Power	Fittings	Colour	Measurements
1 27040 0	031368	4	60 W	E27	Black	178 x 122 x 112 mm
1 27042 0	031375	4	60 W	E27	White	178 x 122 x 112 mm

Power Distribution  
BS / CEE

Extension Sockets  
& Plug-In Appliances  
BS / Lightning & Surge Protection

Power Distribution  
Multi-Line

Extension Sockets  
Multi-Line

Lighting

Home Security & Safety

Home, Workshop & DIY

Advertising Media

## Bulk Head Light IP 44

Splash-proof, IP 44.




- Housing constructed out of solid synthetic material with galvanised protective grill cover.
- Cover: Crystal-clear glass with inner prismatic structure.
- Compact lights for installation in garages, workshops, cellars and external environments.
- Suitable for mounting on either walls or ceilings.
- This luminaire is compatible with bulbs of the energy class: A++ - E.
- Delivery without bulbs.



Article No.	EAN-Code	UP	Power	Fittings	Colour	Measurements
1 27012 0	031344	4	60 W	E27	Grey	176 x 122 x 110 mm
1 27011 0	626472	4	60 W	E27	Black	176 x 122 x 110 mm

## Site Bulb Fitting E27

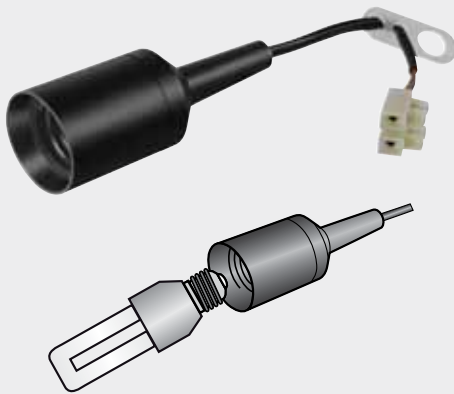

- Ready wired with a 2-pin luster terminal.
- With a fastening plate with 3 holes.
- Connecting cable 15 cm.
- For bulbs with E27 fitting.

Article No.	EAN-Code	UP	Number of poles
1 17990 0	188963	10	2



## PIR Motion Detector PIR 240 IP 44

Automatically switches lamps on and off (incandescent, halogen, energy-saving bulbs and LED lamps) when someone enters the detection zone.

- For indoor and outdoor use, IP 44.
- Detection angle 240°. Max. range 12 m.
- Duty cycle adjustable between 10 sec. and 4 min.
- Response brightness adjustable from 10 to 150 lux.
- Switching capacity max. 1000 Watt (bulbs), max. 300 Watt (energy-saving lamp), max. 100 Watt (LED).
- Adjustable vertically and horizontally.
- With corner attachment.
- In colourful display-packaging.



Article No.	EAN-Code	UP	Voltage	Colour
	4007123...			
<b>1 17091 0</b>	249831	1	230 V	White
<b>1 17191 0</b>	619368	1	230 V	Anthracite



## PIR Motion Detector PIR 180 IP 44

Automatically switches lamps on and off (incandescent, halogen, energy-saving bulbs and LED lamps) when someone enters the detection zone.

- For indoor and outdoor use, IP 44.
- Detection angle 180°. Max. range 12 m.
- Duty cycle adjustable between 10 sec. and 4 min.
- Response brightness adjustable.
- Switching capacity max. 1000 Watt (bulbs), max. 300 Watt (energy-saving lamp), max. 100 Watt (LED).
- Adjustable vertically and horizontally.
- In colourful display-packaging.



Article No.	EAN-Code	UP	Voltage	Colour
	4007123...			
<b>1 17090 0</b>	249817	1	230 V	White
<b>1 17190 0</b>	619344	1	230 V	Anthracite

## Solar LED Spot SOL 80 ALU IP 44 with PIR sensor

In a stylish aluminium casing.  
For outdoor use, IP 44.

- Solar LED spotlights can be used independently of the power grid because they generate their own environmentally friendly solar electricity.
- Solar LED light with PIR sensor and separate solar module
- Spotlight and solar module in a compact, well-designed aluminium casing.
- 8 high performance LEDs for illumination of large areas.
- Pivoting solar lamp.
- PIR sensor with max. 130° detection angle and max. range 10 m.
- Switch-on time adjustable to a max. of approx. 1 minute.
- Response intensity adjustable by a twilight switch.
- Sensitivity adjustable.
- 3 rechargeable and exchangeable NiMH Mignon AA batteries included.
- With integrated overcharge and total discharge protection to ensure continuous charging of the batteries.
- Light ON time is approx. 110 minutes with fully charged batteries.
- Battery capacity: 2,200 mAh.
- In colourful display-packaging.



Article No.	EAN-Code 4007123...	UP	LEDs	Luminous flux	Cable length	Colour
<b>1 17084 0</b>	602209	1	8 x 0,5 W	350 lm	4,75 m	Alu

## Solar LED Light SOL 80 Plus IP 44 with PIR sensor

Practical and suitable for outdoor use, IP 44.

- Solar lamp with PIR sensor and separate solar module.
- 8 very bright LEDs for illumination of large areas.
- Pivoting solar lamp.
- Pivoting PIR sensor with max. 180° detection angle and max. range 12 m.
- Switch-on time adjustable to a max. of approx. 1 minute.
- Can operate independent of the mains.
- Response intensity adjustable by a twilight switch.
- Sensitivity adjustable.
- With integrated over-charge and total discharge protection.
- Operating time of approx. 2 h with fully loaded rechargeable battery.
- Power jack for rapid charging using power supply unit (not included) 12 V DC, min. 400 mA, hollow plug 5.5/2.1 mm, inside positive.
- Inclusive of lead-gel battery.
- In colourful display-packaging.



Article No.	EAN-Code 4007123...	UP	LEDs	Luminous flux	Cable length	Colour
<b>1 17085 0</b>	611713	1	8 x 0,5 W	350 lm	4,75 m	White
<b>1 17095 0</b>	611737	1	8 x 0,5 W	350 lm	4,75 m	Black

Power Distribution  
BS / CEE

Extension Sockets  
& Plug-in Appliances  
BS / Lighting & Surge Protection

Power Distribution  
Multi-Line

Extension Sockets  
Multi-Line

Solar Technology

Home Security & Safety

Home, Workshop & DIY

Advertising Media





## Solar LED-Spot SOL 2x4 IP 44 with PIR sensor

Practical and suitable for outdoor use, IP 44.

- Easy to mount. Simply insert the light or spotlight into the bracket after mounting.
- Free and environmentally friendly charging with solar energy.
- Can operate independent of the mains.
- Solar lamp with PIR sensor and separate solar module.
- 8 high performance LEDs for illumination of large areas.
- LED spot horizontal and vertical slewable.
- Infrared sensor with max 130° angle of reach (horizontal) and max. of 8 m of surrounding.
- Duty cycle adjustable between 10 sec. and 60 sec.
- Response intensity adjustable by a twilight switch.
- 3 rechargeable and exchangeable NiMH Mignon AA batteries included.
- Light ON time is approx. 90 minutes with fully charged batteries.
- Battery capacity: 1.800 mAh.
- In colourful display-packaging.



Article No.	EAN-Code 4007123...	UP	LEDs	Luminous flux	Cable length	Colour
<b>1 17092 0</b>	616367	1	8 x 0,5 W	300 lm	4,75 m	White
<b>1 17093 0</b>	616381	1	8 x 0,5 W	300 lm	4,75 m	Anthracite



## Solar LED External Light SOL 14 Plus IP 44 with PIR sensor

Practical and suitable for outdoor use, IP 44.

- 2 super-bright LEDs, good light for orientation.
- Solar lamp with PIR sensor and separate solar module.
- Horizontale and vertical pivoting solar lamp.
- Pivoting PIR sensor with max. detection angle 180° and max. range 10 m.
- Duty cycle adjustable between 10 sec. and 4 min.
- Can operate independent of the mains.
- Response intensity adjustable by a twilight switch.
- Sensitivity adjustable.
- Operating time of approx. 90 minutes with fully loaded rechargeable battery.
- 3 rechargeable and exchangeable NiMH Mignon AA batteries included.
- In colourful display-packaging.



Article No.	EAN-Code 4007123...	UP	LEDs	Luminous flux	Cable length	Colour
<b>1 17088 0</b>	611751	1	2 x 0,5 W	85 lm	3 m	White
<b>1 17098 0</b>	611775	1	2 x 0,5 W	85 lm	3 m	Black

Power Distribution  
BS / CEE

Extension Sockets  
& Plug-In Appliances  
BS / Lightning & Surge Protection

Power Distribution  
Multi-Line

Extension Sockets  
Multi-Line

Solar Technology

Home Security & Safety

Home, Workshop & DIY

Advertising Media



## Solar LED Wall Lamp SOL 04 Plus IP 44 with PIR sensor

Practical and suitable for outdoor use, IP 44.

- Compact solar lamp with integrated solar module and PIR sensor.
- 2 super-bright LEDs, good light for orientation.
- Detection angle approx. 100°, max. range 7 m.
- Light switches itself on automatically for approx. 1 minute when the detection area is breached.
- Can operate independent of the mains.
- With twilight sensor.
- All in a housing, no connection by a cable necessary.
- Operating time of approx. 80 - 90 minutes with fully loaded rechargeable battery.
- 3 rechargeable and exchangeable NiMH Mignon AA batteries included.
- In colourful display-packaging.



Article No.	EAN-Code 4007123...	UP	LEDs	Luminous flux	Colour
<b>1 17087 0</b>	611799	1	2 x 0,5 W	85 lm	White
<b>1 17097 0</b>	611812	1	2 x 0,5 W	85 lm	Black



## Solar LED Pavement Light SOL FL 13007 IP 44 with PIR sensor and twilight sensor

Practical and suitable for outside use.

- Solar LED pavement light with 13 LEDs for good orientation light.
- Case made of weatherproof plastic and aluminium.
- Features one standby LED that is activated after dark; an additional 12 LEDs are switched on if motion is detected.
- With integrated solar cell.
- 3 rechargeable and exchangeable NiMH Mignon AA batteries included.
- Includes ground spike for placement in the ground or mounting plate for easy installation on a firm surface.
- In colourful display-packaging.



Article No.	EAN-Code 4007123...	UP	LEDs	Luminous flux	Measurements	Colour
<b>1 17079 0</b>	619702	1	13	91 lm	13,5 x 11,5 x 70 cm	Alu/Silver



## Solar LED Wall Light SOL WL 02007 IP 44

Practical and suitable for outside use.

- Solar LED external light with compact and shapely stainless steel casing.
- Features one standby LED that switches on at dusk; a second high-performance LED is switched on when motion is detected.
- Easy to install.
- All in a housing, no connection by a cable necessary.
- With LiFePO4 3.2 V rechargeable battery.
- In colourful display-packaging.



Article No.	EAN-Code	UP	LEDs	Luminous flux	Measurements	Colour
1 17078 0	619696	1	2	30 lm	8 x 5 x 17 cm	Stainless steel



## Illuminated House Number Solar Power SH 4000 IP 44

Easily read solar backlit house number plate of attractive design. Four powerful LEDs illuminate the number automatically when it gets dark.

- Solar House number: No power supply required.
- Operates on solar power delivered by an efficient, integral AA NiMH mignon battery.
- Four energy-saving LEDs giving countless hours of well lit visibility for the house number in the dark.
- Housing made of anti-corrosive stainless steel.
- Large, waterproof solar panel charges the battery.
- Pack includes three of each number from 0 - 9 and a set of letters from A - D, all large and self-adhesive for sticking to the illuminated surface.
- In colourful display-packaging.



Article No.	EAN-Code	UP	LEDs	Measurements	Colour
1 17981 0	164592	1	4	230 x 220 x 65 mm + Height of characters 80 mm	Stainless steel

Power Distribution  
BS / CEE

Extension Sockets  
& Plug-In Appliances  
BS / Lightning & Surge Protection

Power Distribution  
Multi-Line

Extension Sockets  
Multi-Line

Solar Technology

Home Security & Safety

Home, Workshop & DIY

Advertising Media



Power Distribution  
BS / CEE

Extension Sockets  
& Plug-in Appliances  
BS / Lightning & Surge Protection

Power Distribution  
Multi-Line

Extension Sockets  
Multi-Line

Lighting & Solar Technology

Home Security & Safety

Home, Workshop & DIY

Advertising Media





Smoke Alarm

134

Power Distribution  
BS / CEE



CO Detector

135

Extension Sockets  
& Plug-In Appliances  
BS / Lightning & Surge Protection



Fire Blanket

136

Power Distribution  
Multi-Line

Extension Sockets  
Multi-Line

Lighting & Solar Technology

Home Security & Safety

Home, Workshop & DIY

Advertising Media



Power Distribution  
BS / CEE

Extension Sockets  
& Plug-in Appliances  
BS / Lightning & Surge Protection

Power Distribution  
Multi-Line

Extension Sockets  
Multi-Line

Lighting & Solar Technology

Home Security & Safety

Home, Workshop & DIY

Advertising Media



## Smoke Detector RM L 3100

Particularly suitable for long-term use.

- VDS tested according to DIN EN 14604.
- Smoke detector with quality seal „Q“, complies to the increased demands of regulations 14-01 vfdb.
- With approved long-life cycle and reduction of false alarm signals.
- Increased stability against outer effect.
- 10 years of operational life without changing battery.
- 3 V lithium battery fixed in devices for constant operational readiness.
- Optical function display, with test button for the functional check.
- Includes mute function for false alarm and „Do not disturb function“ for low battery level.
- Shrill alarm - 85 dB.
- Optical and acoustic signal when the battery is low.
- Includes mounting materials.
- In colourful display-packaging.



Article No.	EAN-Code	UP	Height x Diameter	Signal sound	Battery type
1 29005 0	631636	1	31 x 100 mm	85 dB	3 V DC



## Smoke Detector RM C 9010

Smoke detectors save lives!

More safety for you, your family and your property!

- Photoelectric detector, tested in accordance with EN 14604.
- Optical function display, with test button for the functional check.
- Shrill alarm - 85 dB.
- Acoustic signal when the battery is low.
- Includes nine-volt battery. Service life at least 1 year.
- Includes mounting materials.
- In colourful display-packaging.



Article No.	EAN-Code	UP	Height x Diameter	Signal sound	Battery type
1 29008 0	640911	1	35 x 100 mm	85 dB	1 x 9 V



### Magnet Assembly Plate BR 1000 for Smoke Detector

- Mounting your smoke alarm without drilling, screwing or noise.
- No damage to the ceiling or cables/ducts.
- Very easy and fast assembly with two self-adhesive magnetic plates.
- Easy to remove the smoke alarm (for tests, replacing the battery, etc.).
- Not suitable for vinyl wallpapers, styrofoam, non-stick coated, silicized or Teflon-coated surface. Only limitedly suitable for smoke alarms with a diameter of less than 8 cm.



Article No.	EAN-Code	UP
1 29000 0	637096	1



### CO Detector CM L 4050

Protects against poisonous carbon monoxide (CO).

- For use in garages, living quarters with open fire places or when camping.
- Durable, modern electro-chemical sensor.
- Alarm signal and LED display.
- Signal tone at the end of the sensor service life.
- Shrill alarm - 85 dB.
- Optical and acoustic signal when the battery is low.
- Includes 3 batteries 1.5 V AA.
- In colourful display-packaging.



Article No.	EAN-Code	UP	Height x Diameter	Signal sound	Battery type
1 29149 0	641581	1	42 x 107 mm	85 dB	3 x 1,5 V AA

Power Distribution  
BS / CEE

Extension Sockets  
& Plug-In Appliances  
BS / Lightning & Surge Protection

Power Distribution  
Multi-Line

Extension Sockets  
Multi-Line

Lighting & Solar Technology

Home Security & Safety

Home, Workshop & DIY

Advertising Media



## Fire Blanket BLD-02

For more safety in your house!



**NEW**

- Tested acc. to EN 1869:2001.
- High quality glass fibre.
- 100 % fibreglass.
- Both sides are coated.
- Extinguish fires in seconds, ideal for home and work.
- Heat resistant up to 550 °C.
- Delivered in hard box for wall fastening.

Article No.	EAN-Code	UP	Measurements
1 29121 0	640867	6	120 x 120 cm

Power Distribution  
BS / CEE

Extension Sockets  
& Plug-in Appliances  
BS / Lightning & Surge Protection

Power Distribution  
Multi-Line

Extension Sockets  
Multi-Line

Lighting & Solar Technology

Home Security & Safety

Home, Workshop & DIY

Advertising Media





### Multifunction Detectors

138

Power Distribution  
BS / CEE



### House & Hobby

139

Extension Sockets  
& Plug-In Appliances  
BS / Lightning & Surge Protection



### Hose Reels

141

Power Distribution  
Multi-Line



### Trestles & Ladders

144

Extension Sockets  
Multi-Line

Lighting & Solar Technology

Home Security & Safety

Home, Workshop & DIY

Advertising Media



## Multifunction Detector WMV Plus

Metal/voltage/beam detector

- For locating metal, voltage-carrying cables (AC voltage) and wooden beams, e.g. in walls.
- 3 functions on one appliances, functions can be individually applied.
- Accurate display of the measurement result on a large LCD display (numerical and by bar charts) as well as acoustically.
- Automatic sensitivity control.
- Automatic switch-off after end of the measurement.
- Battery low voltage display.
- Battery compartment for 9 V block (delivered without battery).
- User friendly through the operating button on the side and front.
- Ergonomic design.
- Maximum detection: wood up to 40 mm, AC voltage approx. 30 - 50 mm, metal approx. 50 - 80 mm.
- In blister packaging.



Article No.	EAN-Code	UP
1 29818 0	249909	1



## Electronic Multi-Tester MT 6 S/2

- Non-contact location of cables with AC voltage.
- Checking phase, neutral and earthing conductor at the sockets.
- Continuity check, e.g. of fuses, bulbs, etc.
- Polarity check, e.g. of batteries.
- Display through the LED.
- Small and handy.
- Because of the super-bright LED, can also be used as a torch.
- Inclusive 3 replaceable coin cells.
- In blister packaging.



Article No.	EAN-Code	UP
1 29715 0	249916	5



## Moisture Detector MD

- To determine the moisture content of wood or building material, such as, e.g. concrete, brick, screed, plasterboard, wallpaper, etc.
- Measurement range of 5 - 50 % for wood, or 1.5 - 33 % for building material.
- Display on a large LCD display (in percent, resolution 0.1 %) as well as acoustically (can be deactivated).
- Practical „hold“ function also makes measurement possible at locations difficult to access.
- Automatic switch-off approx. 3 mins, after last application.
- Battery low voltage display.
- Robust, ergonomic housing with separate compartment for 9 V monobloc battery (not included).
- With protective cap.
- In colourful display-packaging.



Article No.	EAN-Code	UP
1 29868 0	249893	1



## PMR Walkie Talkie TRX 3500

Free communication up to a distance of 5 km.

- In leisure time or when undertaking private or professional activities.
- Easy to use, small, handy and robust.
- LC display with background lighting.
- Eight channels with automatic channel search.
- Automatic battery saving function.
- Four ring tones, Roger Beep.
- Automatic noise suppressor.
- Keypad interlock.
- Battery monitoring.
- Including belt clip.
- Six AAA batteries required per set (batteries not included).
- In blister packaging.



Article No.	EAN-Code	UP
1 29094 0	632725	1

Power Distribution  
BS / CEEExtension Sockets  
& Plug-In Appliances  
BS / Lightning & Surge ProtectionPower Distribution  
Multi-LineExtension Sockets  
Multi-Line

Lighting &amp; Solar Technology

Home Security &amp; Safety

Home, Workshop &amp; DIY

Advertising Media



## Signograph 25 Diamant-Set

Electric engraver - Engraving is as easy as writing.

- The universal set for all materials from soft to extra hard. With diamond, hard metal and hardened styluses. 2 forming heads for soft metals such as copper, tin and aluminium.
- Vibration strength: a (peak)~ = 74,02 m/s<sup>2</sup> = 7,545 g (peak value)  
a (rms)~ = 52,34 m/s<sup>2</sup> = 5,336 g (rms-value/root-mean-square-value).
- In colourful display-packaging.

Article No.	EAN-Code 4007123...	UP	Cable length	Cable	Plug
<b>1 50076 3</b>	051656	1	1,8 m	H05VV-F 2x0,75	BS 1363



## Signograph 25 Set

Electric engraver - Engraving is as easy as writing.

- A powerful engraver with interchangeable hardened stylus and hard metal stylus.
- Vibration strength: a (peak)~ = 74,02 m/s<sup>2</sup> = 7,545 g (peak value)  
a (rms)~ = 52,34 m/s<sup>2</sup> = 5,336 g (rms-value/root-mean-square-value).
- In colourful display-packaging.

Article No.	EAN-Code 4007123...	UP	Cable length	Cable	Plug
<b>1 50074 3</b>	051649	1	2 m	H05VV-F 2x0,75	BS 1363

### Recommended accessories for Article No.: 1 50076 0 + 1 50074 0:

Article No.	EAN-Code 4007123...	UP	Description
<b>1 50813 0</b>	020485	1	Adapter for spare stylus
<b>1 50053 0</b>	011964	1	Diamond stylus 2,5 x 18 mm
<b>1 50824 0</b>	020508	1	Modelling tool, ball tip
<b>1 50825 0</b>	020515	1	Modelling tool, pointed
<b>1 50054 0</b>	020492	1	Sintered carbide stylus



## Compressor Hose Reel Anti Twist

With anti-twist centre for professional use.

- Ideal for any air tools.
- Reel body made from special plastic fitted to a galvanised steel tube frame.
- Suitable for wall-mounting, comes with 2 hooks.
- Available either with PCL or DIN quick couplings.
- Advantage:  
Hose can be unwound / wound while the connecting hose (2 m) is fitted to the compressor.

Article No.	EAN-Code 4007123...	UP	Hose length	Hose-Ø	Working pressure	Fittings
<b>1 12703 3</b>	091447	1	20 m	9/15 mm	15 bar	PCL (British System)
<b>1 12703 0</b>	002481	1	20 m	9/15 mm	15 bar	DIN



## Compressor Hose Reel Standard

- Ideal for any air tools.
- Reel body made from special plastic fitted to a galvanised steel tube frame.
- Suitable for wall-mounting, comes with 2 hooks.
- Available either with PCL or DIN quick couplings.
- Hose has to be unwound before connected to the compressor.



Article No.	EAN-Code 4007123...	UP	Hose length	Hose-Ø	Working pressure	Fittings
<b>1 12704 3</b>	091454	1	20 m	9/15 mm	15 bar	PCL (British System)
<b>1 12702 0</b>	001392	1	20 m	6/12 mm	15 bar	DIN

Power Distribution  
BS / CEEExtension Sockets  
& Plug-In Appliances  
BS / Lightning & Surge ProtectionPower Distribution  
Multi-LineExtension Sockets  
Multi-Line

Lighting &amp; Solar Technology

Home Security &amp; Safety

Home, Workshop &amp; DIY

Advertising Media



**NEW**

## Automatik-Box Air ABA 10D

- 10 m + 2 m highly flexible hose made of polyurethan, suitable for air or cold water.
- Hose Ø 8/12 mm for max. working pressure 12 bar.
- Measurement: 335 x 360 x 180 mm.
- Robust housing made of Polypropylen.
- With comfortable automatic reeling with ratchet hose release.
- 1/4" connections.
- For fitting on walls and ceilings.

Article No.	EAN-Code 4007123...	UP	Hose length	Colour
1 24032 0 300	284177	1	10 + 2 m	Blue



## Water Hose Reel WS 32

The light, practical and mobile water hose extension.

- Special hose with textile inlay and spiral wound cross-weave.
- Flexible and pressure-resistant.
- With a spraying nozzle with waterstop and a top connector.
- Drum is made of special highly breakproof plastic.
- Strong carrying frame made of galvanized tubular steel.
- Easy to wind and rewind.



Article No.	EAN-Code 4007123...	UP	Hose length	Hose-Ø	Reel-Ø
1 23712 0	079575	1	20 m	1/2"	320 mm

Power Distribution  
BS / CEE

Extension Sockets  
& Plug-in Appliances  
BS / Lightning & Surge Protection

Power Distribution  
Multi-Line

Extension Sockets  
Multi-Line

Lighting & Solar Technology

Home Security & Safety

Home, Workshop & DIY

Advertising Media



## Garant® Storage Reel - Empty

For everything that needs to be rolled up.

- Tubes.
- Rolls of fencing.

Article No.	EAN-Code	UP	Reel-Ø
1 13071 0	000647	1	290 mm



## Brobusta® G Storage Reel - Empty

For everything that needs to be rolled up.

- Tubes.
- Rolls of fencing.

Article No.	EAN-Code	UP	Reel-Ø
1 31900 0	058266	1	380 mm

Power Distribution  
BS / CEE

Extension Sockets  
& Plug-In Appliances  
BS / Lightning & Surge Protection

Power Distribution  
Multi-Line

Extension Sockets  
Multi-Line

Lighting & Solar Technology

Home Security & Safety

Home, Workshop & DIY

Advertising Media



Power Distribution  
BS / CEE

Extension Sockets  
& Plug-in Appliances  
BS / Lightning & Surge Protection

Power Distribution  
Multi-Line

Extension Sockets  
Multi-Line

Lighting & Solar Technology

Home Security & Safety

Home, Workshop & DIY

Advertising Media



## Steel Workstand MB 110

- Strong, stable square-profile steel tubing.
- Impact and scratch-resistant plastic coating.
- Folds up to save space.
- Easy to install.
- Box contents require partial assembly.



Article No.	EAN-Code	UP	Height	Width	Loading capacity	Weight appr.
1 44480 0	101658	4	0,71 m	0,63 m	110 kg	3,0 kg



## Extending Workstand MB 120 KH With Quick-Clamping System

- Strong, stable steel trestle.
- Ideal on staircases; feet fitted with protective caps.
- Fitted with quick-clamping system. Legs individually and conveniently height-adjustable up to 86 cm.
- Impact and scratch-resistant plastic coating.
- Wide, non-slip surface.
- Compact, can be folded up, comes with carrying handle.
- In colourful display-packaging.



Article No.	EAN-Code	UP	Height	Width	Loading capacity	Height-adjustable	Weight appr.
1 44461 0	147687	2	0,86 m	0,96 m	120 kg	61 - 86 cm	6,3 kg





## Telescopic Extending Workstand MB 160 H

- Strong, stable square-profile steel tubing.
- Impact and scratch-resistant plastic coating.
- Folds up to save space.
- Vertically adjustable - stability assured by user-friendly locking pins.
- Extending locking hooks prevent the worktop from sliding off sideways (max. 64 cm wide).
- Easy to install.
- Box contents require partial assembly.



Article No.	EAN-Code 4007123...	UP	Height	Width	Loading capacity	Height-adjustable	Weight appr.
1 44470 0	101641	2	1,3 m	0,68 m	160 kg	82 - 130 cm	6,3 kg

Power Distribution  
BS / CEEExtension Sockets  
& Plug-In Appliances  
BS / Lightning & Surge ProtectionPower Distribution  
Multi-LineExtension Sockets  
Multi-Line

Lighting &amp; Solar Technology

Home Security &amp; Safety

Home, Workshop &amp; DIY

Advertising Media

## Saw Horse MB 150 S



- Strong, stable, angled steel profile.
- Galvanised finish ensures effective protection against rust.
- Non-slip, serrated supporting surface.
- Compact, can be folded up.
- Easy to carry.
- Box contents require partial assembly.



Article No.	EAN-Code 4007123...	UP	Height	Width	Depth	Loading capacity	Weight appr.
<b>1 44084 0</b>	112319	2	0,79 m	0,81 m	0,85 m	150 kg	7,8 kg

## Wooden Stepladder and Trestle HAB 150



- Solid and stable.
- Workmanship of the highest quality.
- The side rails are made of selected pine, and premium quality beech is used for the rungs.
- The ladder comes complete with robust galvanised fittings to give even greater stability.

Article No.	EAN-Code 4007123...	UP	Height	Width	Loading capacity	Rungs	Weight appr.
<b>1 48501 0</b>	030453	1	0,95 m	0,63 m	150 kg	2 x 3	5 kg



## Telescopic Aluminium Ladder

The variable lightweight ladder for universal applications.

- Can be used as a straight ladder or a stepladder, and this also on stairs or uneven surfaces.
- The well proven brennenstuhl® hinges enable the ladder to be modified from a straight ladder to a stepladder within a few seconds.
- Easy and safe rung-by-rung height adjustment.
- Equipped with non-slip rubber feet.
- Exceptionally compact for easy transporting and storage.
- Side rails and rungs of aluminium.



Article No.	EAN-Code 4007123...	UP	Rungs	Height of stepladder	Length of ladder	Transport dimensions: length x width x depth	Weight appr.
1 42034 0	042562	1	4 x 4	max. 2,1 m	max. 4,2 m	1,3 x 0,6 x 0,2 m	14,8 kg
1 42035 0	042579	1	4 x 5	max. 2,6 m	max. 5,3 m	1,6 x 0,6 x 0,2 m	17,3 kg



## Aluminium Stepladder with Work-Tray

The extra-light and reliable aluminium ladder with a big work-tray (approx. 28 x 11 cm) for any kind of tools, etc. Saves time and unnecessary climbing up and down.

- Exceptional firm positioning by wide, ribbed rungs (with extra safety straps for the versions larger than 6 steps).
- A combination of high-quality aluminium profiles and expert workmanship guarantees prolonged serviceability and safety.
- High safety rail (60 cm).
- Compact for easy transporting and storage.



Article No.	EAN-Code 4007123...	UP	Level	Platform height	Transport dimensions: length x width x depth	Weight appr.
1 40123 0	020102	1	3	0,54 m	1,22 x 0,42 x 0,13 m	3,2 kg
1 40124 0	020119	1	4	0,76 m	1,45 x 0,43 x 0,13 m	3,7 kg
1 40125 0	020126	1	5	0,97 m	1,68 x 0,46 x 0,13 m	4,3 kg
1 40126 0	020133	1	6	1,19 m	1,91 x 0,49 x 0,13 m	5,1 kg
1 40127 0	020140	1	7	1,41 m	2,13 x 0,51 x 0,13 m	6,9 kg
1 40128 0	020157	1	8	1,62 m	2,45 x 0,53 x 0,13 m	7,4 kg

Power Distribution  
BS / CEE

Extension Sockets  
& Plug-In Appliances  
BS / Lightning & Surge Protection

Power Distribution  
Multi-Line

Extension Sockets  
Multi-Line

Lighting & Solar Technology

Home Security & Safety

Home, Workshop & DIY

Advertising Media



# From digital to reality!




## 3D shelf planning

We offer you a quick and free option for planning shelf walls. With our 3D shelf planner, we arrange and visualise your individual assortment for you as a sales wall.

This way you get a realistic impression of the assortment at the P.O.S. The exact placing coordination for the stockers, the exact numbered amounts to be hung and product values are, so to speak, delivered all in one work process. That guarantees absolute certainty in planning and transparency and promises good sales and revenue - directly from the start.



Configure your shelving dimensions quickly and easily.



Display your products together as a range.



Rearrange and swap around your products in a matter of minutes.



Your made-to-measure shelving program awaits you. It is really efficient, as your valuable sales space will be allocated perfectly.

## Tailor-made to the last detail - simple and effective!



Power Distribution  
BS / CEE

Extension Sockets  
& Plug-in Appliances  
BS / Lightning & Surge Protection

Power Distribution  
Multi-Line

Extension Sockets  
Multi-Line

Lighting & Solar Technology

Home Security & Safety

Home, Workshop & DIY

Advertising Media



Displays

148

Power Distribution  
BS / CEE



Sticker, Banner & Signboards

150

Extension Sockets  
& Plug-In Appliances  
BS / Lightning & Surge Protection



Dump Bins

152

Power Distribution  
Multi-Line



Sales Displays

155

Extension Sockets  
Multi-Line

Lighting & Solar Technology

Home Security & Safety

Home, Workshop & DIY

Advertising Media



Power Distribution  
BS / CEE

Extension Sockets  
& Plug-in Appliances  
BS / Lightning & Surge Protection

Power Distribution  
Multi-Line

Extension Sockets  
Multi-Line

Lighting & Solar Technology

Home Security & Safety

Home, Workshop & DIY

Advertising Media



## Transparent Sticker with Logo

- Can be ordered from your local sales representative.

Article No.	EAN-Code 4007123...	UP	Imprint	Measurements	Colour
<b>0 41612 3</b>	190959	1	Logo	25 x 15 cm	Red/Black
<b>0 41612 4</b>	190966	1	Logo	16,3 x 10 cm	Red/Black
<b>0 41612 5</b>	190973	1	Logo	16,3 x 10 cm	Red/White
<b>0 41612 6</b>	190980	1	Logo	13 x 8 cm	Red/Black
<b>0 41612 7</b>	190997	1	Logo	6,5 x 4 cm	Red/Black

## Banner PVC

- Can be ordered from your local sales representative.

Article No.	EAN-Code 4007123...	UP	Languages	Description	Measurements
<b>0 48685 0</b>	635788	1	Neutral	Logos Made in Germany + Engineered in Germany	2 x 1 m



<b>0 48685 1</b>	635795	1	Neutral	Logos Engineered in Germany + Products	2 x 1 m
------------------	--------	---	---------	--	---------



## Signboard: Logo With Internet Address

- For all countries.
- Can be ordered from your local sales representative.



Article No.	EAN-Code 4007123...	UP	Languages	Measurements
<b>0 41562 2</b>	156399	1	Neutral	98 x 40 cm
<b>0 45257 2</b>	566549	1	Neutral	125 x 40 cm



## Signboard: Quality Products

- Can be ordered from your local sales representative.

Article No.	EAN-Code	UP	Languages	Measurements
	4007123...			
<b>0 45425 8</b>	598274	1	EN	98 x 40 cm
<b>0 47125 3</b>	612383	1	EN	100 x 20 cm



## Signboard: Made in Germany

- Can be ordered from your local sales representative.

Article No.	EAN-Code	UP	Languages	Measurements
	4007123...			
<b>0 47166 3</b>	616442	1	EN	125 x 40 cm



## Signboard: German Engineering & Product Safety

- Can be ordered from your local sales representative.

Article No.	EAN-Code	UP	Languages	Measurements
	4007123...			
<b>0 47166 4</b>	616459	1	EN	125 x 40 cm



## Signboard: hugo! Extension Sockets

- Can be ordered from your local sales representative.

Article No.	EAN-Code	UP	Languages	Measurements
	4007123...			
<b>0 47488 1</b>	630394	1	EN	98 x 40 cm
<b>0 47488 2</b>	630400	1	EN	125 x 40 cm
<b>0 47490 3</b>	630455	1	EN (Export)	98 x 40 cm
<b>0 47490 4</b>	630462	1	EN (Export)	125 x 40 cm



## LuxPremium-LED Demo Display

For totally 3 items!



- For displaying 3 pcs. LuxPremium-LED torches of product range 2016/2017.
- Fixed to the display by nylon wire.
- Labels and topper to be ordered separately.
- Display comes without torches.

Article No.	EAN-Code	UP	Languages	Description	Colour	Measurements
0 99660 0	637768	1	Neutral	Display empty for 3 torches including fuses and cable ties	Red	30 x 27,5 x 35 cm
0 99661 3	637799	1	EN	Inlay	Black/Red	30 x 35 cm

## Vertical Adjustable Single Sales Display For City LED Spotlights

- Can be ordered from your local sales representative.



Article No.	EAN-Code	UP	Description	Measurements
1 17969 0 101	643455	1	Sales Display for City-LED Spots	240 x 180 x 400 mm

### Recommended accessories:

Article No.	EAN-Code	UP	Description	Languages	Suitable for
0 48943 4	647101	1	Label for Sales Display City Strahler	EN	117929 0 310, 117929 0 311, 117929 0 320, 117929 0 321
0 48943 5	647118	1	Label for Sales Display City Strahler	EN	117929 0 610, 117929 0 611, 117929 0 620, 117929 0 621
0 48943 6	647125	1	Label for Sales Display City Strahler	EN	117929 0 612, 117929 0 613, 117929 0 622, 117929 0 623
0 48943 9	647156	1	Label for Sales Display City Strahler	EN	117961 0, 117962 0
0 48944 0	647163	1	Label for Sales Display City Strahler	EN	117963 0, 1179664 0
0 48943 7	647132	1	Label for Sales Display City Strahler	EN	117965 0, 117966 0
0 48943 8	647149	1	Label for Sales Display City Strahler	EN	117967 0, 117968 0





## Universal Promo Box Brown

- Can be ordered from your local sales representative.
- Adjustable in length.

Article No.	EAN-Code	UP	Measurements
	4007123...		
<b>0 43135 3</b>	285785	1	min. 466 cm/max. 566 x 297 x 240 cm
<b>0 43135 6</b>	285877	1	min. 366 cm/max. 466 x 197 x 240 cm



## Universal Promo Box

- Delivery without products.
- Can be ordered from your local sales representative.

Article No.	EAN-Code	UP	Languages	Description	Measurements
	4007123...				
<b>0 01084 4</b>	093816	1	Neutral	with logo	53,4 x 29,7 x 24 cm
<b>0 41868 1</b>	215607	1	Neutral	Neutral	53,4 x 29,7 x 24 cm



## Promo Box Neutral

- Delivery without products.
- Varied quantities!

Article No.	EAN-Code	UP	Languages	Description	Measurements
	4007123...				
<b>0 47395 0</b>	632312	1	Neutral	Headboard with brennenstuhl® logo	34 x 25 cm
<b>0 01085 4</b>	632466	1	Neutral	Promo box without brennenstuhl® logo	34 x 39,7 x 13,6 cm

Power Distribution  
BS / CEEExtension Sockets  
& Plug-In Appliances  
BS / Lightning & Surge ProtectionPower Distribution  
Multi-LineExtension Sockets  
Multi-Line

Lighting &amp; Solar Technology

Home Security &amp; Safety

Home, Workshop &amp; DIY

Advertising Media



Power Distribution  
BS / CEE

Extension Sockets  
& Plug-in Appliances  
BS / Lighting & Surge Protection

Power Distribution  
Multi-Line

Extension Sockets  
Multi-Line

Lighting & Solar Technology

Home Security & Safety

Home, Workshop & DIY

Advertising Media



## Stackable Promo Box

- Delivery without products.
- Can be ordered from your local sales representative.

Article No.	EAN-Code 4007123...	UP	Languages	Description	Measurements
<b>0 01083 7</b>	091478	1	Neutral	Box for stackable promo box	54,5 x 36,8 x 25 cm
<b>0 01083 8</b>	091485	1	Neutral	Headboard for stackable promo box	49,7 x 54,5 cm
<b>0 45103 7</b>	249176	1	1. side german, 2. side EN, NL, SE, ES, GR, TR, RU, PT, FI	Headboard „standby“	49,7 x 54,5 cm



## Stackable Promo Box With Separating Web

- Delivery without products.
- Can be ordered from your local sales representative.

Article No.	EAN-Code 4007123...	UP	Languages	Description	Measurements
<b>0 01085 6</b>	610341	1	Neutral	Stackable Promo Box with Separating Web	58,6 x 37,4 x 27,5 cm
<b>0 01085 7</b>	610877	1	Neutral	Separating web	
<b>0 01086 1</b>	634491	1	Neutral	Corrugated cardboard	58,4 x 37,2 cm



## Promo Box „Big“

- Delivery without products.
- Can be ordered from your local sales representative.

Power Distribution  
BS / CEEExtension Sockets  
& Plug-In Appliances  
BS / Lightning & Surge ProtectionPower Distribution  
Multi-LineExtension Sockets  
Multi-Line

Lighting &amp; Solar Technology

Home Security &amp; Safety

Home, Workshop &amp; DIY

Advertising Media

Article No.	EAN-Code	UP	Languages	Measurements
1 99986 0	036981	1	Neutral	59 x 59 x 80 cm



## Basic Stand without Sign Board

- Delivery without products.
- Can be ordered from your local sales representative.

Article No.	EAN-Code	UP	Languages	Description
1 99951 0	164479	1	-	Basic Stand with 4 wheels order separately 199954 0 with header brennenstuhl logo
1 99952 0	164486	1	-	Wire bottom (use on its own or as a bottom for a dump bin)
1 99953 0	164493	1	-	Basket (please order additional wire bottom)
1 99955 0	164523	1	-	Hanging Hook 20 cm
1 99954 0	164509	1	Neutral	Additional sign board



Power Distribution  
BS / CEE

Extension Sockets  
& Plug-in Appliances  
BS / Lightning & Surge Protection

Power Distribution  
Multi-Line

Extension Sockets  
Multi-Line

Lighting & Solar Technology

Home Security & Safety

Home, Workshop & DIY

Advertising Media



## Universal Sales Display Stand (Cable Reels)

- Will be supplied FOC on request for orders of 16 cable reels, or for a mixture of reels and extension leads.
- Basic dimensions 62 x 50 cm.
- Delivery without products.
- Can be ordered from your local sales representative.

Article No.	EAN-Code	UP
1 19900 0	4007123...	020621 1



## City LED Sales Panel

- Sales panels are the best way to realize sales deals.
- Attractive wooden display stand, digitally printed.
- 2 lights with easy connectable power plugs to demonstrate brightness at the POS.
- Size: 1/2 palette (60 x 80 cm).
- Height: 190 cm.

Article No.	EAN-Code	UP	Languages	Scope of delivery
1 17969 3 010	629480	1	EN	3 x 117963 0 + 6 x 117964 0 9 x 117962 0 3 x 117965 0 + 6 x 117966 0
1 17969 3 020	629510	1	EN	6 x 117961 0 + 6 x 117962 0 9 x 117965 0 9 x 117966 0
1 17969 3 030	629541	1	EN	9 x 117964 0, 9 x 117968 0, 6 x 117966 0, 3 x 117965 0



## City LED Sales Display 2. Generation

- Sales panels are the best way to realize sales deals.
- Attractive wooden display stand, digitally printed.
- 2 lights with easy connectable power plugs to demonstrate brightness at the POS.
- Size: 1/2 palette (60 x 80 cm).
- Height: 190 cm.

Article No.	EAN-Code	UP	Languages	Scope of delivery
1 17929 3 031	638642	1	EN	without products, mounted with 117929 0 613 and 117929 0 321

Power Distribution  
BS / CEEExtension Sockets  
& Plug-In Appliances  
BS / Lightning & Surge ProtectionPower Distribution  
Multi-LineExtension Sockets  
Multi-Line

Lighting &amp; Solar Technology

Home Security &amp; Safety

Home, Workshop &amp; DIY

Advertising Media

## Jet-Light Bulb



- Fittings: GR10q
- Mercury content: 5 mg
- Luminaire maintenance factor: 77 % after 2.000 h.  
70 % after 4.000 h.  
68 % after 8.000 h.
- Lamp Survival Factor: 98 % after 2.000 h.  
90 % after 4.000 h.  
50 % after 8.000 h.
- Energy efficiency class: A



Article No.	EAN-Code 4007123...	UP	Packaging	Power	Luminous flux	Lamp efficacy	Colour temperature	Colour rendering index	E c (kWh/1000h)
<b>1 17765 0</b>	210206	1	Sales Box	55 W	3600 lm	66 lm/W	6400 K	80	60,50

## Halogen Bulb

Quality product from PHILIPS.

- Life time 2.000 hours.
- Colour temp. 2.900 K.
- Integrated fuse.

Article No.	EAN-Code 4007123...	UP	Packaging	Power	Luminous flux	Fittings	Length approx.	Energy efficiency class	E c (kWh/1000h)
<b>1 17763 0</b>	152728	10	Sales Box	1000 W	24200 lm	R7s	189 mm	B	1000



## Halogen Bulb

- Colour temp. 2.900 K.
- Life time 1.000 hours.

Article No.	EAN-Code 4007123...	UP	Packaging	Power	Luminous flux	Fittings	Length approx.	Energy efficiency class	E c (kWh/1000h)
<b>1 17013 0</b>	006861	10	Sales Box	1000 W	18000 lm	R7s	189 mm	C	1000



<b>1 17020 0</b>	020379	10	Sales Box	1500 W	26000 lm	R7s	254 mm	C	1500
------------------	--------	----	-----------	--------	----------	-----	--------	---	------



## Halogen Bulb


- Saves 20 % electricity!
- Dimmable.
- Life time 2.000 hours.
- Number of switching cycles  $\geq$  8.000 x.
- Colour temp. 2.900 K.
- Warm-up time up to 60 % of the full light output: none.
- Lamp mercury content: 0.0 mg.
- Colour rendering index = 100.
- Ignition time < 0.2 sec.
- Lamp power factor: 1.
- Packaging: Sales Box
- Fittings: R7s
- Energy efficiency class: C

Article No.	EAN-Code 4007123...	UP	Voltage	Power	Luminous flux	Length approx.	Diameter approx.	Luminaire maintenance factor	E c (kWh/1000h)
<b>1 17856 0 120</b>	619498	10		120 W	2216 lm	80 mm	12 mm	$\leq$ 85 %	120
									
<b>1 17856 0 230</b>	619535	10		230 W	4644 lm	119,6 mm	12 mm	$\leq$ 92 %	230
									
<b>1 17856 0 400</b>	619573	10		400 W	8545 lm	119,6 mm	12 mm	$\leq$ 92 %	400
									
<b>1 17858 0 400</b>	619658	10	110 V	400 W	8545 lm	118 mm	10 mm		400
									

## Halogen Bulb

Quality product from SYLVANIA.

- Life time 2.000 hours.
- Colour temp. 3.000 K.

Article No.	EAN-Code 4007123...	UP	Packaging	Power	Luminous flux	Fittings	Length approx.	Energy efficiency class	E c (kWh/1000h)
<b>1 17063 0</b>	612390	10	Sales Box	1000 W	20000 lm	R7s	189 mm	C	1000
									

Article No.	Page
0 01083 7	154
0 01083 8	154
0 01084 4	153
0 01085 4	153
0 01085 6	154
0 01085 7	154
0 01086 1	154
0 41562 2	150
0 41612 3	150
0 41612 4	150
0 41612 5	150
0 41612 6	150
0 41612 7	150
0 41868 1	153
0 43135 3	153
0 43135 6	153
0 45103 7	154
0 45257 2	150
0 45425 8	151
0 47125 3	151
0 47166 3	151
0 47166 4	151
0 47395 0	153
0 47488 1	151
0 47488 2	151
0 47490 3	151
0 47490 4	151
0 48685 0	150
0 99660 0	83
0 99660 0	152
0 99661 3	83
0 99661 3	152
1 07818 3 004	17
1 07818 7 900	71
1 08099 0	11
1 08099 3	11
1 09320 3	20
1 09420 3	20
1 09545 3	19
1 09545 3 110	27
1 09820 3	20
1 09820 7 900	71
1 09825 3 001	17
1 09825 3 027	17
1 09841 3 001	17
1 09874 3	26
1 09878 3	26
1 10820 3	20
1 10855 3	20
1 10856 3	20
1 10856 7 900	71
1 10890 3	20
1 10912 3	20
1 10922 3	20
1 10923 3	20

Article No.	Page
1 12702 0	141
1 12703 0	141
1 12703 3	141
1 12704 3	141
1 13071 0	143
1 13195 3	24
1 13887 3	24
1 14174 3	18
1 14877 3	24
1 14885 3	25
1 15040 3	56
1 15042 3	56
1 15061 3 318	34
1 15061 3 328	34
1 15061 3 378	34
1 15062 3 444	56
1 15062 3 454	56
1 15141 3	27
1 15176 3	19
1 15323 3 000	53
1 15323 3 020	53
1 15323 3 070	53
1 15325 3 000	43
1 15325 3 020	43
1 15325 3 070	43
1 15330 3 120	51
1 15330 3 124	51
1 15330 3 128	51
1 15334 3 215	52
1 15334 3 218	52
1 15334 3 625	42
1 15334 3 628	42
1 15339 3 120	51
1 15339 3 124	51
1 15339 3 128	51
1 15354 3 134	35
1 15600 7 135	76
1 15600 7 155	77
1 15603 7 135	76
1 15603 7 415	77
1 15605 3 024	49
1 15605 3 374	33
1 15605 3 394	33
1 15605 3 594	32
1 15605 7 135	76
1 15605 7 155	77
1 15605 7 415	77
1 15625 3 416	50
1 15625 3 515	39
1 15650 7 135	76
1 15650 7 155	77
1 15655 7 135	76
1 15655 7 155	77
1 15675 3	34
1 15945 3 616	55

Article No.	Page
1 15950 3	56
1 15952 3	56
1 16044 0	22
1 16055 0	67
1 16065 0	67
1 16432 0	68
1 16433 0	68
1 16434 0	68
1 16435 0	68
1 16436 0	67
1 16630 3 110	28
1 16646 3	28
1 16650 3	21
1 16654 3	21
1 16655 3	21
1 16656 3	21
1 16657 3	21
1 16765 0 110	30
1 16765 0 210	30
1 16765 0 225	30
1 16771 0	29
1 16772 0	29
1 16773 0	29
1 16774 0	29
1 16797 0	29
1 16820 3	21
1 16821 3	21
1 16846 3	28
1 16850 0	29
1 16858 0	29
1 16859 0	29
1 17013 0	158
1 17020 0	158
1 17031 0	103
1 17061 0	103
1 17063 0	159
1 17078 0	131
1 17079 0	130
1 17084 0	128
1 17085 0	128
1 17087 0	130
1 17088 0	129
1 17090 0	127
1 17091 0	127
1 17092 0	129
1 17093 0	129
1 17095 0	128
1 17097 0	130
1 17098 0	129
1 17121 0	111
1 17122 0 102	110
1 17124 0	111
1 17125 0 010	105
1 17125 0 015	104
1 17125 0 020	104

Article No.	Page
1 17125 0 121	109
1 17125 0 122	109
1 17125 0 221	108
1 17125 0 222	108
1 17125 0 321	107
1 17125 0 322	107
1 17125 0 521	106
1 17125 0 522	106
1 17125 0 821	105
1 17125 3 123	96
1 17125 3 133	96
1 17125 3 323	96
1 17125 3 333	96
1 17125 3 524	95
1 17125 3 534	95
1 17126 3 111	102
1 17126 3 211	102
1 17133 3 312	95
1 17138 0	111
1 17142 0 050	101
1 17142 3	101
1 17143 0 050	100
1 17143 3	100
1 17148 3	110
1 17190 0	127
1 17191 0	127
1 17225 0	111
1 17236 0	112
1 17239 0	112
1 17265 0	112
1 17308 0	87
1 17322 3	62
1 17326 3	61
1 17329 0	62
1 17334 0	113
1 17335 0	113
1 17382 3	97
1 17382 3 110	97
1 17383 3	97
1 17390 0	125
1 17541 0 010	89
1 17542 0	91
1 17542 0 010	90
1 17543 3	89
1 17545 3	86
1 17547 3	92
1 17548 3	92
1 17560 3	98
1 17560 3 110	98
1 17567 0	86
1 17589 0	88
1 17599 0	90
1 17601 3	94
1 17611 3	93
1 17644 0	88



Article No.	Page
1 17678 3	94
1 17763 0	158
1 17765 0	158
1 17828 0	112
1 17856 0 120	159
1 17856 0 230	159
1 17856 0 400	159
1 17858 0 400	159
1 17859 3	87
1 17860 0 051	83
1 17860 0 161	82
1 17860 3 160	82
1 17860 3 200	81
1 17860 3 400	81
1 17860 3 600	80
1 17868 3	80
1 17874 0	84
1 17875 0	84
1 17876 0	85
1 17878 0	85
1 17928 0 110	114
1 17928 0 120	114
1 17928 0 210	114
1 17928 0 220	114
1 17928 3 410	99
1 17929 0 310	116
1 17929 0 311	116
1 17929 0 320	116
1 17929 0 321	116
1 17929 0 610	117
1 17929 0 611	117
1 17929 0 612	118
1 17929 0 613	118
1 17929 0 620	117
1 17929 0 621	117
1 17929 0 622	118
1 17929 0 623	118
1 17929 3 031	157
1 17961 0	121
1 17962 0	122
1 17963 0	121
1 17964 0	122
1 17965 0	119
1 17966 0	120
1 17967 0	119
1 17968 0	120
1 17969 0 101	152
1 17969 3 010	123
1 17969 3 010	156
1 17969 3 020	123
1 17969 3 020	156
1 17969 3 030	123
1 17969 3 030	156
1 17981 0	131
1 17989 0 100	85

Article No.	Page
1 17990 0	126
1 18245 0	11
1 18276 0	10
1 18277 3	9
1 19320 3	9
1 19801 3	16
1 19805 3	16
1 19805 7 900	70
1 19806 3	16
1 19806 7 900	70
1 19807 3	24
1 19809 3	16
1 19811 3	16
1 19886 3	15
1 19900 0	156
1 19983 3	16
1 20801 3	14
1 20806 3	14
1 20806 7 900	70
1 20811 3	14
1 20812 3	14
1 20834 3	13
1 20885 3	15
1 20886 3	15
1 21805 3	14
1 21805 7 900	70
1 21875 3	14
1 23712 0	142
1 23807 3	10
1 24032 0 300	142
1 24100 3 110	26
1 24100 3 300	18
1 24101 3 110	26
1 24102 3 300	18
1 25605 3 044	49
1 25605 3 378	33
1 27011 0	126
1 27012 0	126
1 27040 0	125
1 27042 0	125
1 27070 0	125
1 27072 0	125
1 27078 0	124
1 27079 0	124
1 29000 0	135
1 29005 0	134
1 29008 0	134
1 29063 3	22
1 29064 3	22
1 29094 0	139
1 29121 0	136
1 29149 0	135
1 29715 0	138
1 29818 0	138
1 29868 0	139

Article No.	Page
1 30895 3	12
1 30895 3 110	23
1 30945 3	13
1 31130 3	12
1 31885 3	23
1 31900 0	143
1 31900 3 014	44
1 31900 3 016	44
1 31900 3 018	44
1 31900 3 515	37
1 31900 3 644	40
1 31900 3 646	40
1 31900 3 654	40
1 31900 7 135	74
1 31900 7 155	74
1 31900 7 333	75
1 31900 7 553	75
1 39400 3 416	50
1 39620 3 003	54
1 39620 3 013	54
1 40123 0	147
1 40124 0	147
1 40125 0	147
1 40126 0	147
1 40127 0	147
1 40128 0	147
1 42034 0	147
1 42035 0	147
1 44084 0	146
1 44461 0	144
1 44470 0	145
1 44480 0	144
1 48501 0	146
1 48685 1	150
1 50074 3	140
1 50076 3	140
1 50645 3	60
1 50660 3	60
1 50695 3	35
1 50704 3	59
1 50745 3	58
1 50747 3	58
1 50750 3	59
1 50826 3	61
1 50846 0	66
1 50850 0	64
1 50850 0 010	64
1 50852 0	65
1 50853 0	63
1 50853 3	63
1 50855 0	65
1 95113 3 100	46
1 95113 3 101	46
1 95114 3 100	46
1 95114 3 603	41

Article No.	Page
1 95114 3 604	41
1 95115 3 600	38
1 95116 3 100	47
1 95116 3 602	41
1 95116 3 603	41
1 95118 3 100	47
1 95118 3 601	41
1 95133 7 900	76
1 95152 3 600	48
1 95153 7 900	76
1 95154 3 100	46
1 95154 3 101	47
1 95154 3 102	47
1 95154 3 603	41
1 95155 3 600	48
1 95156 3 100	47
1 95156 3 101	47
1 95156 3 601	41
1 95158 3 100	47
1 95224 3 100	46
1 95224 3 102	47
1 95226 3 100	47
1 95228 3 100	47
1 95513 3 100	46
1 95554 3 100	46
1 95556 3 100	47
1 95558 3 100	47
1 99951 0	155
1 99952 0	155
1 99953 0	155
1 99954 0	155
1 99955 0	155
1 99986 0	155

**brennenstuhl®**

\_ smart technology.

**brennenstuhl® International Group**



**Hugo Brennenstuhl GmbH & Co. KG**  
Headquarter Werk 1



**Hugo Brennenstuhl GmbH & Co. KG**  
Headquarter Werk 2

**BERNOLSHEIM**  
France 

**TÜBINGEN**  
Germany 

**TAUFKIRCHEN**  
Austria 

**BAAR**  
Switzerland 



**Brennenstuhl S.A.S.**



**Lectra Technik Ges.m.b.H.**



**Lectra Technik AG**




# brennenstuhl®



\_ smart technology.

## We are exactly where you need us.

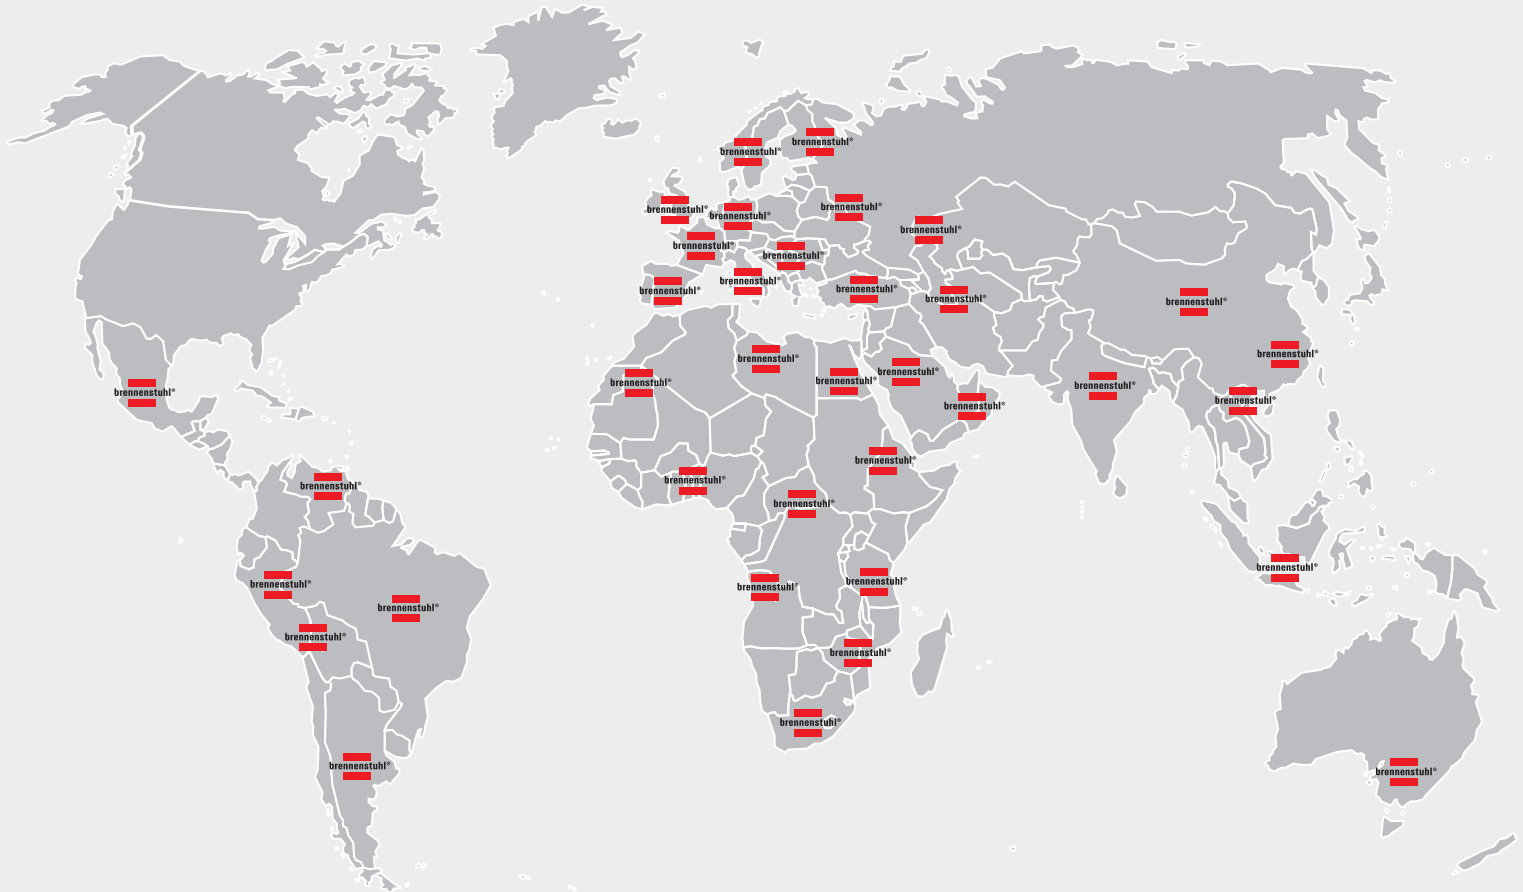

Our brennenstuhl® Sales Representatives - on the road throughout Germany  
but always at your disposal. Contact **Telephone +49 (0) 70 71 - 88 01-0**


Just call us. We would be very pleased in choosing the right products for your demand  
together with you.







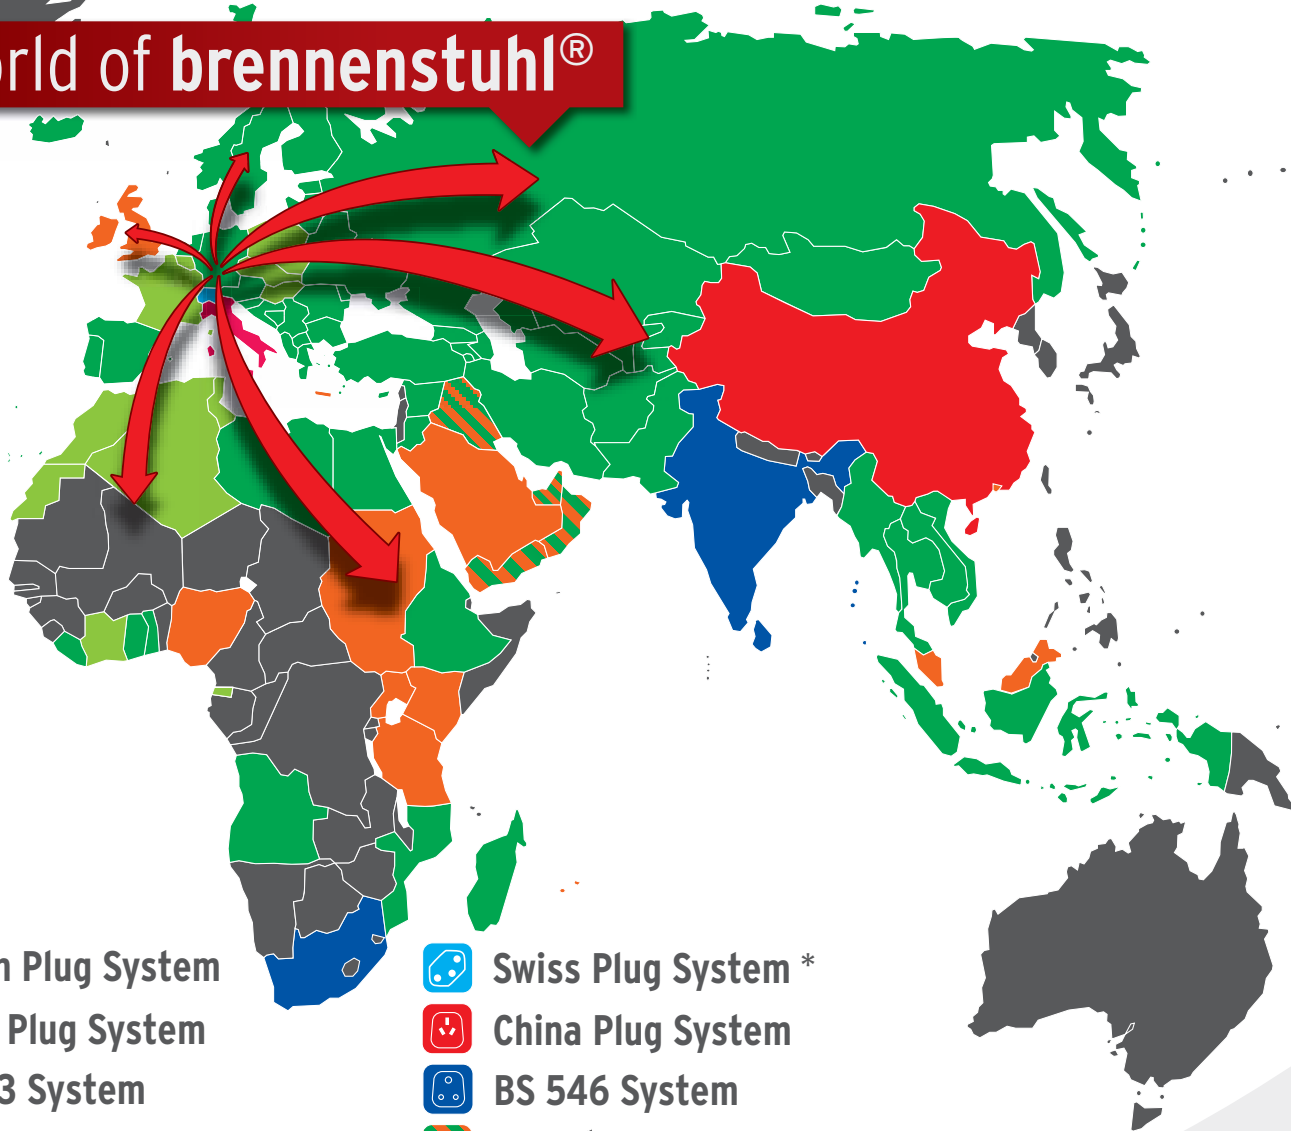


Together we will start the successful sales of our products.



brennenstuhl® is a certified AEO, or authorised economic operator,  
and as such is eligible for all simplified customs procedures within and outside the EU

# The World of brennenstuhl®



-  German Plug System
-  French Plug System
-  BS 1363 System
-  Italian Plug System\*  
\*Available only with Lectra Trading AG, Swiss
-  Swiss Plug System \*
-  China Plug System
-  BS 546 System
-  Universal Plug System  
("three-in-one" )

**brennenstuhl®**

\_ smart technology.

## Hugo Brennenstuhl GmbH & Co. Kommanditgesellschaft

Elektrotechnik · Elektronik · Sicherheitstechnik  
72074 Tübingen · Seestraße 1-3 · Germany

Tel. +49 (0) 70 71 - 88 01 - 0 · Fax +49 (0) 70 71 - 8 76 57  
[www.brennenstuhl.com](http://www.brennenstuhl.com) · [export@brennenstuhl.de](mailto:export@brennenstuhl.de)

ILN-Nr. 40-07123-00000-5  
Ust.-Id.-Nr. DE 146890047

